



# ENVIRONMENTAL PRODUCT DECLARATION

*In accordance with ISO 14025 for*

**Nonset 50**  
**Nonset 50 FF**  
**Nonset 50 SR**



Programme:  
**The International  
EPD<sup>®</sup> System;**  
[www.environdec.com](http://www.environdec.com)

Programme  
operator:  
**EPD International AB**

EPD registration  
number:  
**S-P-01011**

Approval  
date:  
**2017-10-09**

Valid until:  
**2022-10-08**

Geographical  
scope:  
**International**





## 1. COMPANY DESCRIPTION / GOAL & SCOPE

Founded in 1937 in Milan, Italy, Mapei produces adhesives and complementary products for laying all types of floor, wall and coating materials, and is also specialized in other chemical products used in the building industry, such as waterproofing products, special mortars, admixtures for concrete, products for underground constructions and for the restoration of concrete and historical buildings.

There are currently 81 subsidiaries in Mapei Group, with a total of 73 production facilities located around the world in 34 different countries and in 5 different continents. Mapei has also 18 central laboratories. Most locations are ISO 9001 and ISO 14001 or EMAS-certified.

Mapei's strategy of internationalization is based on two main objectives: being closer to local needs and the lowest transport costs possible. With the declared objective of being close to buyers and clients, the strength of Mapei in the five continents is to comply the requirements of each single country, and to use only locally-based managers and qualified personnel, without changing the approach of the Company.

Mapei invests 12% of its company's total work-force and 5% of its turnover in Research & Development; in particular, 70% of its R&D efforts are directed to develop eco-sustainable and environmentally friendly products which give important contribution to all main green rating for eco-sustainable buildings such as LEED and BREEAM.

Furthermore, Mapei has developed a sales and technical service network with offices all over the world and offers an efficient Technical Assistance Service that is valued by architects, engineers, contractors and owners.

The goal of the study is to provide necessary data and documentation to produce an EPD according to the requirements of PCR according to EN 15804:2014 and PCR Environdec, version 2.2, date 2017-05-30 and to have more comprehension about the environmental impacts related to **Nonset 50**, **Nonset 50 FF** and **Nonset 50 SR** manufactured in Mapei AS located in Sagstua (Norway), in year 2016, including packaging of the finished products.

Target audiences of the study are customers and other parties with an interest in the environmental impacts of **Nonset 50**, **Nonset 50 FF** and **Nonset 50 SR**.

This analysis shall not support comparative assertions intended to be disclosed to the public.

## 2. PRODUCT DESCRIPTION

**Nonset 50**, **Nonset 50 FF** and **Nonset 50 SR** are cement-based dry mortars, which expand 1 – 3 % before setting. The mortars are composed of cement, well-graded sand, expanding, stabilising and plasticizing substances.

**Nonset 50 FF** contains also additives which ensure that the cement sets and will not crack even at surface and air temperatures down to -10°C. **Nonset**, **Nonset 50 FF** and **Nonset 50 SR** are used for all types of foundations and concrete repairs in thicknesses up to 150 mm.

The three products are compliant with EN 13813 (“Screed material and floor screeds. Screed material. Properties and requirements”), and supplied in 25 kg multiply bags or in big-bags (only for **Nonset 50** and **Nonset 50 SR**) with 1000 kg of finished product.



## 3. CONTENT DECLARATION

The main components and ancillary materials of **Nonset 50**, **Nonset 50 FF** and **Nonset 50 SR**, are the following:

Table 1: Composition

Materials	Percentage (%)
binders	70 – 90
fillers	10 – 20
Other (additives & packaging)	0 – 10

These products contain no substances of very high concern (SVHC) on the REACH Candidate List published by the European Chemicals Agency in a concentration more than 0,1% (by unit weight).

Nonset 50  
Nonset 50 FF  
Nonset 50 SR



## 4. DECLARED UNIT AND REFERENCE SERVICE LIFE

The declared unit is 1 kg of powder (included packaging).

Packaging materials include:

- Wooden pallet
- Multipliy bags (paper/PE/paper)
- PP (big-bags)
- LDPE used as wrapping material

Due to the selected system boundary, the reference service life of the products is not specified.

## 5. SYSTEM BOUNDARIES & ADDITIONAL TECHNICAL INFORMATION

The approach is a “cradle to gate” with options. The following modules have been considered:

- A1-A3 (Product stage): extraction and transport of raw materials, packaging included, production process;
- A4 (Construction Process stage): transport of the finished product to final customers.

Table 2: System boundaries

System Boundaries													
A1 – A3			A4 – A5		B1 – B7					C1 – C4			
PRODUCT STAGE			CONSTRUCTION STAGE		USE STAGE					END OF LIFE STAGE			
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	C1	C2	C3	C4
Raw Material Supply	Transport	Manufacturing	Transport	Installation Process	Use	Maintenance	Repair	Replacement	Refurbishment	Deconstruction/ Demolition	Transport	Waste Processing	Disposal
					B6	Operational Energy Use							
					B7	Operational Water Use							

included
  excluded

A brief description of the production process, is the following:

Figure 1: Production process detail - © Photo Halvor Gudim



The production process starts from raw materials, that are purchased from external and intercompany suppliers and stored in the plant. Bulk raw materials are stored in specific silos and added automatically in the production mixer, according to the formula of the product. Other raw materials, supplied in bags or big bags, are stored in the warehouse and added automatically or manually in the mixer. The production is a discontinuous process, in which all the components are mechanically mixed in batches. The semi-finished product is then packaged in bags, put on wooden pallets, covered by stretched hoods and stored in the Finished Products' warehouse. The quality of final products is controlled before the sale.

Nonset 50  
Nonset 50 FF  
Nonset 50 SR



Figure 2: Sagstua Plant



Table 3: Transport to the building site (A4)

Name	Value	Unit
Means of transport: truck euro 3 with 27 tons of payload		
Litres of fuel (truck)	~ 2E-03	l/DU*100km
Transport distance (weighted average)	300	km
Capacity utilisation (including empty runs)	85	%
Capacity utilisation volume factor	100	%
DU: declared unit		

## 6. CUT-OFF RULES & ALLOCATION

Criteria for the exclusion of inputs and outputs (cut-off rules) in the LCA, information modules and any additional information are intended to support an efficient calculation procedure. They are not applied in order to hide data.

The following procedure is followed for the exclusion of inputs and outputs:

- All inputs and outputs to a unit process, for which data are available, are included in the calculation.
- Less than 1% of the total mass inputs/outputs of the unit process A3 are cut-off (see Table 4).

Input flows are covered for the whole formula.

Table 4: Cut-off criteria

Process excluded from study	Cut-off criteria	Quantified contribution from process
A3: production (auxiliary materials)	less than $10^{-5}$ kg / kg of finished product	Sensitivity study demonstrates a relative contribution lower than 2%
A3: waste	less than $10^{-5}$ kg / kg of finished product	Sensitivity study demonstrates a relative contribution lower than 2%

For the allocation procedure and principles, consider the following table (Table 5):

Table 5: Allocation procedure and principles

Module	Allocation Principle
A1	All data are referred to 1 kg of powder product <ul style="list-style-type: none"> <li>• A1: electricity is allocated to the mortars plant</li> </ul>
A3	All data are referred to 1 kg of powder packaged product: <ul style="list-style-type: none"> <li>• A3-wastes: all data are allocated to the mortars plant</li> </ul>
A4	All data are referred to 1 kg of powder packaged product: <ul style="list-style-type: none"> <li>• A4: a weighted average scenario has been used referred to the mortars plant)</li> </ul>

Nonset 50  
Nonset 50 FF  
Nonset 50 SR










## 7. ENVIRONMENTAL PERFORMANCE & INTERPRETATION

Following tables show environmental impacts for the products considered according to CML methodology (2010 - Jan 2016).

### Nonset 50

Table 6: **Nonset 50** (packaged with multiply bags): Environmental categories

System boundary		Upstream + core	Downstream
Modules	Unit	A1-A3	A4
 <b>ADP<sub>e</sub></b> (element)	kg Sb eq.	4,68E-07	1,30E-09
 <b>ADP<sub>f</sub></b> (fossil)	MJ	4,27E+00	2,21E-01
 <b>AP</b>	kg SO <sub>2</sub> eq.	1,27E-03	9,55E-05
 <b>EP</b>	kg (PO <sub>4</sub> ) <sup>3-</sup> eq.	3,45E-04	2,42E-05
 <b>GWP<sub>100</sub></b>	kg CO <sub>2</sub> eq.	7,08E-01	1,61E-02
 <b>ODP</b>	(Kg R-11 eq.)	2,69E-09	5,37E-15
 <b>POCP</b>	kg ethylene eq.	1,13E-04	-4,21E-05

**GWP100:** Global Warming Potential; **ADPe:** Abiotic Depletion Potential (elements); **EP:** Eutrophication Potential; **AP:** Acidification Potential; **POCP:** Photochemical Ozone Creation Potential; **ODP:** Ozone Depletion Potential; **ADPf:** Abiotic Depletion Potential (fossil)



Table 7: **Nonset 50** (packaged with multiply bags): other environmental indicators

System boundary		Upstream + core	Downstream
Parameter	Unit	A1-A3	A4
RPEE	MJ	1,30E+00	1,11E-02
RPEM	MJ	-	-
TPE	MJ	1,30E+00	1,11E-02
NRPE	MJ	4,53E+00	2,22E-01
NRPM	MJ	-	-
TRPE	MJ	4,53E+00	2,22E-01
SM	kg	-	-
RSF	MJ	-	-
NRSF	MJ	-	-
W	m <sup>3</sup>	1,19E-03	2,53E-04

**RPEE** Renewable primary energy as energy carrier; **RPEM** Renewable primary energy as material utilisation; **TPE** Total use of renewable primary energy sources; **NRPE** Non-renewable primary energy as energy carrier; **NRPM** Non-renewable primary energy as material utilization; **TRPE** Total use of non-renewable primary energy sources; **SM** Use of secondary materials; **RSF** Renewable secondary fuels; **NRSF** Non-renewable secondary fuels; **W** Net use of fresh water [total freshwater consumption]

Table 8: **Nonset 50** (packaged with multiply bags): waste production & other output flows

System boundary		Upstream + core	Downstream
Parameter	Unit	A1-A3	A4
NHW	kg	6,01E-02	-
HW	kg	3,32E-06	-
RW	kg	0,00E+00	-
Components for re-use	kg	-	-
Materials for recycling	kg	-	-
Materials for energy recovery	kg	-	-
Exported energy	MJ	-	-


**HW** Hazardous waste disposed; **NHW** Non Hazardous waste disposed; **RW** Radioactive waste disposed

Nonset 50  
Nonset 50 FF  
Nonset 50 SR



## Nonset 50

Table 9: **Nonset 50** (packaged with bigbags): Environmental categories

System boundary		Upstream + core	Downstream
Modules	Unit	A1-A3	A4
 <b>ADP<sub>e</sub></b> (element)	kg Sb eq.	4,66E-07	1,30E-09
 <b>ADP<sub>f</sub></b> (fossil)	MJ	4,46E+00	2,21E-01
 <b>AP</b>	kg SO <sub>2</sub> eq.	1,32E-03	9,54E-05
 <b>EP</b>	kg (PO <sub>4</sub> ) <sup>3-</sup> eq.	3,49E-04	2,42E-05
 <b>GWP<sub>100</sub></b>	kg CO <sub>2</sub> eq.	7,16E-01	1,61E-02
 <b>ODP</b>	(Kg R-11 eq.)	2,69E-09	5,36E-15
 <b>POCP</b>	kg ethylene eq.	1,17E-04	-4,21E-05

**GWP<sub>100</sub>**: Global Warming Potential; **ADP<sub>e</sub>**: Abiotic Depletion Potential (elements); **EP**: Eutrophication Potential; **AP**: Acidification Potential; **POCP**: Photochemical Ozone Creation Potential; **ODP**: Ozone Depletion Potential; **ADP<sub>f</sub>**: Abiotic Depletion Potential (fossil)

Table 10: **Nonset 50** (packaged with bigbags): other environmental indicators

System boundary		Upstream + core	Downstream
Parameter	Unit	A1-A3	A4
RPEE	MJ	1,18E+00	1,11E-02
RPEM	MJ	-	-
TPE	MJ	1,18E+00	1,11E-02
NRPE	MJ	4,73E+00	2,22E-01
NRPM	MJ	-	-
TRPE	MJ	4,73E+00	2,22E-01
SM	kg	-	-
RSF	MJ	-	-
NRSF	MJ	-	-
W	m <sup>3</sup>	1,23E-03	2,53E-04

**RPEE** Renewable primary energy as energy carrier; **RPEM** Renewable primary energy as material utilisation; **TPE** Total use of renewable primary energy sources; **NRPE** Non-renewable primary energy as energy carrier; **NRPM** Non-renewable primary energy as material utilization; **TRPE** Total use of non-renewable primary energy sources; **SM** Use of secondary materials; **RSF** Renewable secondary fuels; **NRSF** Non-renewable secondary fuels; **W** Net use of fresh water [total freshwater consumption]

Table 11: **Nonset 50** (packaged with bigbags): waste production & other output flows

System boundary		Upstream + core	Downstream
Parameter	Unit	A1-A3	A4
NHW	kg	6,01E-02	-
HW	kg	3,32E-06	-
RW	kg	0,00E+00	-
Components for re-use	kg	-	-
Materials for recycling	kg	-	-
Materials for energy recovery	kg	-	-
Exported energy	MJ	-	-


**HW** Hazardous waste disposed; **NHW** Non Hazardous waste disposed; **RW** Radioactive waste disposed

Nonset 50  
Nonset 50 FF  
Nonset 50 SR



## Nonset 50 FF

Table 12: **Nonset 50 FF** (packaged with multiply bags): Environmental categories

System boundary		Upstream + core	Downstream
Modules	Unit	A1-A3	A4
 <b>ADP<sub>e</sub></b> (element)	kg Sb eq.	1,06E-06	1,30E-09
 <b>ADP<sub>f</sub></b> (fossil)	MJ	4,15E+00	2,21E-01
 <b>AP</b>	kg SO <sub>2</sub> eq.	8,51E-04	9,55E-05
 <b>EP</b>	kg (PO <sub>4</sub> ) <sup>3-</sup> eq.	5,39E-04	2,42E-05
 <b>GWP<sub>100</sub></b>	kg CO <sub>2</sub> eq.	7,59E-01	1,61E-02
 <b>ODP</b>	(Kg R-11 eq.)	1,18E-08	5,37E-15
 <b>POCP</b>	kg ethylene eq.	1,06E-04	-4,21E-05

**GWP<sub>100</sub>**: Global Warming Potential; **ADP<sub>e</sub>**: Abiotic Depletion Potential (elements); **EP**: Eutrophication Potential; **AP**: Acidification Potential; **POCP**: Photochemical Ozone Creation Potential; **ODP**: Ozone Depletion Potential; **ADP<sub>f</sub>**: Abiotic Depletion Potential (fossil)

Table 13: **Nonset 50 FF** (packaged with multiply bags): other environmental indicators

System boundary		Upstream + core	Downstream
Parameter	Unit	A1-A3	A4
RPEE	MJ	1,36E+00	1,11E-02
RPEM	MJ	-	-
TPE	MJ	1,36E+00	1,11E-02
NRPE	MJ	4,55E+00	2,22E-01
NRPM	MJ	-	-
TRPE	MJ	4,55E+00	2,22E-01
SM	kg	-	-
RSF	MJ	-	-
NRSF	MJ	-	-
W	m <sup>3</sup>	3,83E-01	2,53E-04

**RPEE** Renewable primary energy as energy carrier; **RPEM** Renewable primary energy as material utilisation; **TPE** Total use of renewable primary energy sources; **NRPE** Non-renewable primary energy as energy carrier; **NRPM** Non-renewable primary energy as material utilization; **TRPE** Total use of non-renewable primary energy sources; **SM** Use of secondary materials; **RSF** Renewable secondary fuels; **NRSF** Non-renewable secondary fuels; **W** Net use of fresh water [total freshwater consumption]

Table 14: **Nonset 50 FF** (packaged with multiply bags): waste production & other output flows






System boundary		Upstream + core	Downstream
Parameter	Unit	A1-A3	A4
NHW	kg	6,95E-02	-
HW	kg	3,47E-06	-
RW	kg	0,00E+00	-
Components for re-use	kg	-	-
Materials for recycling	kg	-	-
Materials for energy recovery	kg	-	-
Exported energy	MJ	-	-

**HW** Hazardous waste disposed; **NHW** Non Hazardous waste disposed; **RW** Radioactive waste disposed

Nonset 50  
Nonset 50 FF  
Nonset 50 SR

## Nonset 50 SR

Table 15: **Nonset 50 SR** (packaged with multiply bags): Environmental categories

System boundary		Upstream + core	Downstream
Modules	Unit	A1-A3	A4
 <b>ADP<sub>e</sub></b> (element)	kg Sb eq.	6,17E-07	1,30E-09
 <b>ADP<sub>f</sub></b> (fossil)	MJ	4,95E+00	2,21E-01
 <b>AP</b>	kg SO <sub>2</sub> eq.	1,67E-03	9,55E-05
 <b>EP</b>	kg (PO <sub>4</sub> ) <sup>3-</sup> eq.	3,73E-04	2,42E-05
 <b>GWP<sub>100</sub></b>	kg CO <sub>2</sub> eq.	7,62E-01	1,61E-02
 <b>ODP</b>	(Kg R-11 eq.)	3,65E-09	5,37E-15
 <b>POCP</b>	kg ethylene eq.	1,43E-04	-4,21E-05

**GWP<sub>100</sub>**: Global Warming Potential; **ADPe**: Abiotic Depletion Potential (elements); **EP**: Eutrophication Potential; **AP**: Acidification Potential; **POCP**: Photochemical Ozone Creation Potential; **ODP**: Ozone Depletion Potential; **ADPf**: Abiotic Depletion Potential (fossil)

Table 16: **Nonset 50 SR** (packaged with multiply bags): other environmental indicators

System boundary		Upstream + core	Downstream
Parameter	Unit	A1-A3	A4
RPEE	MJ	1,34E+00	1,11E-02
RPEM	MJ	-	-
TPE	MJ	1,34E+00	1,11E-02
NRPE	MJ	5,32E+00	2,22E-01
NRPM	MJ	-	-
TRPE	MJ	5,32E+00	2,22E-01
SM	kg	-	-
RSF	MJ	-	-
NRSF	MJ	-	-
W	m <sup>3</sup>	1,44E-03	2,53E-04

**RPEE** Renewable primary energy as energy carrier; **RPEM** Renewable primary energy as material utilisation; **TPE** Total use of renewable primary energy sources; **NRPE** Non-renewable primary energy as energy carrier; **NRPM** Non-renewable primary energy as material utilization; **TRPE** Total use of non-renewable primary energy sources; **SM** Use of secondary materials; **RSF** Renewable secondary fuels; **NRSF** Non-renewable secondary fuels; **W** Net use of fresh water [total freshwater consumption]

Table 17: **Nonset 50 SR** (packaged with multiply bags): waste production & other output flows


System boundary		Upstream + core	Downstream
Parameter	Unit	A1-A3	A4
NHW	kg	6,03E-02	-
HW	kg	3,33E-06	-
RW	kg	0,00E+00	-
Components for re-use	kg	-	-
Materials for recycling	kg	-	-
Materials for energy recovery	kg	-	-
Exported energy	MJ	-	-

**HW** Hazardous waste disposed; **NHW** Non Hazardous waste disposed; **RW** Radioactive waste disposed

Nonset 50  
Nonset 50 FF  
Nonset 50 SR

## Nonset 50 SR

Table 18: **Nonset 50 SR** (packaged with bigbags): Environmental categories

System boundary		Upstream + core	Downstream
Modules	Unit	A1-A3	A4
 <b>ADP<sub>e</sub></b> (element)	kg Sb eq.	6,16E-07	1,30E-09
 <b>ADP<sub>f</sub></b> (fossil)	MJ	5,14E+00	2,21E-01
 <b>AP</b>	kg SO <sub>2</sub> eq.	1,73E-03	9,54E-05
 <b>EP</b>	kg (PO <sub>4</sub> ) <sup>3-</sup> eq.	3,77E-04	2,42E-05
 <b>GWP<sub>100</sub></b>	kg CO <sub>2</sub> eq.	7,71E-01	1,61E-02
 <b>ODP</b>	(Kg R-11 eq.)	3,65E-09	5,36E-15
 <b>POCP</b>	kg ethylene eq.	1,47E-04	-4,21E-05

**GWP<sub>100</sub>**: Global Warming Potential; **ADP<sub>e</sub>**: Abiotic Depletion Potential (elements); **EP**: Eutrophication Potential; **AP**: Acidification Potential; **POCP**: Photochemical Ozone Creation Potential; **ODP**: Ozone Depletion Potential; **ADP<sub>f</sub>**: Abiotic Depletion Potential (fossil)



Table 19: **Nonset 50 SR** (packaged with bigbags): other environmental indicators

System boundary		Upstream + core	Downstream
Parameter	Unit	A1-A3	A4
RPEE	MJ	1,22E+00	1,11E-02
RPEM	MJ	-	-
TPE	MJ	1,22E+00	1,11E-02
NRPE	MJ	5,53E+00	2,22E-01
NRPM	MJ	-	-
TRPE	MJ	5,53E+00	2,22E-01
SM	kg	-	-
RSF	MJ	-	-
NRSF	MJ	-	-
W	m <sup>3</sup>	1,48E-03	2,53E-04

**RPEE** Renewable primary energy as energy carrier; **RPEM** Renewable primary energy as material utilisation; **TPE** Total use of renewable primary energy sources; **NRPE** Non-renewable primary energy as energy carrier; **NRPM** Non-renewable primary energy as material utilization; **TRPE** Total use of non-renewable primary energy sources; **SM** Use of secondary materials; **RSF** Renewable secondary fuels; **NRSF** Non-renewable secondary fuels; **W** Net use of fresh water [total freshwater consumption]

Table 20: **Nonset 50 SR** (packaged with bigbags): waste production & other output flows

System boundary		Upstream + core	Downstream
Parameter	Unit	A1-A3	A4
NHW	kg	6,03E-02	-
HW	kg	3,33E-06	-
RW	kg	0,00E+00	-
Components for re-use	kg	-	-
Materials for recycling	kg	-	-
Materials for energy recovery	kg	-	-
Exported energy	MJ	-	-

**HW** Hazardous waste disposed; **NHW** Non Hazardous waste disposed; **RW** Radioactive waste disposed

Nonset 50  
Nonset 50 FF  
Nonset 50 SR



Tables from 6 to 20 show absolute results for all the environmental categories considered. Calculations point out that module **A1** has the highest contribution for most environmental indicators (i.e. relative contribution in  $GWP_{100}$  is more than 95%).

Raw materials extraction and processing show the most relevant environmental load considering the whole life cycle of the finished product. In particular, the hydraulic binder and the fillers have the strongest influence on the results.

The bigbag used to package the finished product (module **A3**) has a higher environmental load (see table 21 e 22) for all the environmental categories considered (except ADPe e ODP) due to the PP emission factor (higher than paper one).

Transportation modules (**A2**, **A4**) highlight a significant contribution for most environmental impact categories (ODP and ADPe excluded). In particular, for POCP they show a negative contribution due to NO and NO<sub>2</sub> emission factors as reported in CML 2001 (Jan. 2016) methodology.

The following tables show the relative contributions of the modules **A1** – **A4**, and a detail on  $GWP_{100}$  representative for the three products included in this EPD (Table 23).

Table 21: Environmental Impact as percentage – Representative for all product packaged with bigbag


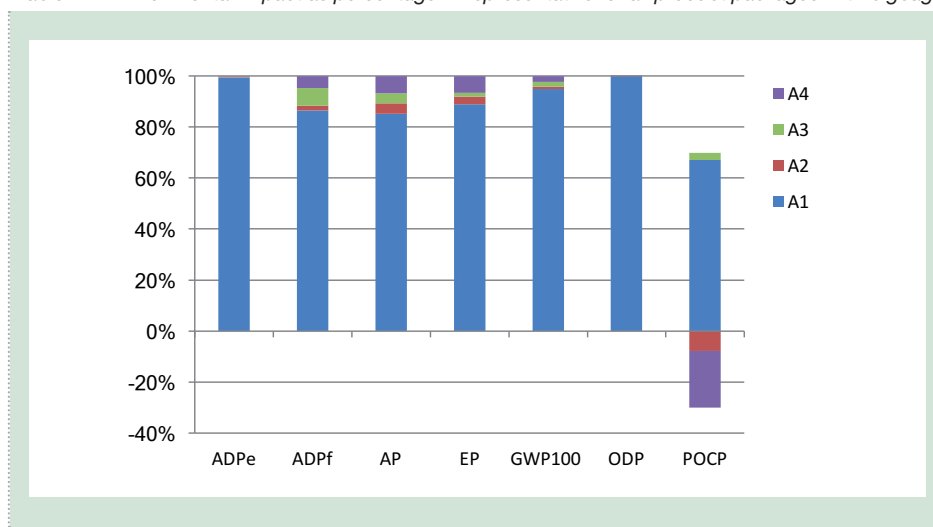


Table 22: Environmental Impact as percentage – Representative for all product packaged with multiply bag



Table 23: Detail on GWP<sub>100</sub>: raw materials contribution

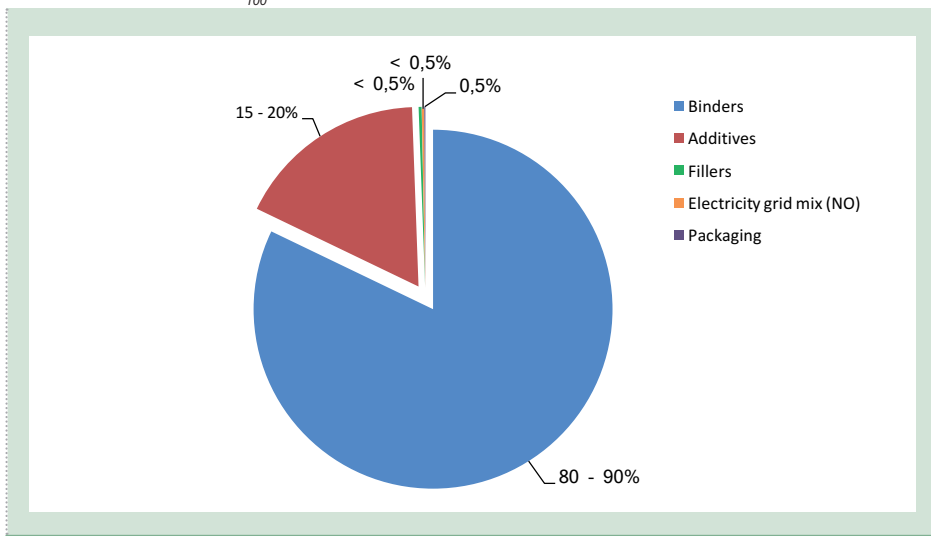

More details about electrical mix used in this EPD (Norwegian grid mix – 2013), is shown below:

Data source	Amount	Unit
GaBi (v6) database	0,0356	kg CO <sub>2</sub> -eqv/kWh

Nonset 50  
Nonset 50 FF  
Nonset 50 SR

## 8. DATA QUALITY

Table 24: Data quality

Dataset & Geographical reference	Database (source)	Temporary reference
<b>A1; A3</b>		
PTL binder	EPD NORCEM n23N rev1	2013
Fillers (EU)	GaBi Database	2016
Electricity grid mix (NO)	GaBi Database	2013
Additives & others (Packaging components)	GaBi Database, Plastic Europe, EPD EFCA 20150091	2005 – 2016
<b>A2; A4</b>		
Truck transport (euro 3, 27ton payload – GLO)	GaBi Database	2016
Oceanic ship (27500 DWT - GLO)	GaBi Database	2016
Light Train (Gross Ton Weight 500 Tons - GLO)	GaBi Database	2016
Electricity mix (EU)	GaBi Database	2013
Diesel for transport (EU)	GaBi Database	2013
Heavy Fuel Oil (EU)	GaBi Database	2013

All data included in table above refer to a period between 2005 and 2016; the most relevant ones are European or specific from supplier, while the others (i.e. transport and minor contribution dataset), come from European, global and German databases.

All dataset are not more than 10 years old (according to EN 15804 § 6.3.7 “Data quality requirements”). Unique exception is due to one packaging component coming from PlasticEurope database.

Primary data are collected during 2016 and representative for the entire annual production.

## 9. VERIFICATION AND REGISTRATION

EPD of construction products may not be comparable if they do not comply with EN 15804. Environmental product declarations within the same product category from different programs may not be comparable.

CEN standard EN15804 served as the core PCR	
PCR:	PCR 2012:01 Construction products and Construction services, Version 2.2, 2017-05-30
PCR review was conducted by:	The Technical Committee of the International EPD® System. Chair: Massimo Marino Contact via <a href="mailto:info@environdec.com">info@environdec.com</a>
Independent verification of the declaration and data, according to ISO 14025	<input checked="" type="checkbox"/> EPD Process Certification (Internal) <input type="checkbox"/> EPD Verification (external)
Third party verifier:	Certiquality S.r.l. Number of accreditation: 003H rev14
Accredited or approved by:	Accredia

## 10. REFERENCES

- GENERAL PROGRAMME INSTRUCTIONS OF THE INTERNATIONAL EPD® SYSTEM. VERSION 2.5.
- PCR 2012:01; “PRODUCT GROUP CLASSIFICATION: MULTIPLE UN CPC CODES CONSTRUCTION PRODUCTS AND CONSTRUCTION SERVICES”; VERSION 2.2
- EN 13813 “SCREED MATERIAL AND FLOOR SCREEDS. SCREED MATERIAL. PROPERTIES AND REQUIREMENTS”

Nonset 50  
Nonset 50 FF  
Nonset 50 SR



## CONTACT INFORMATION

EPD owner:



Mapei AS  
[www.mapei.no](http://www.mapei.no)

LCA author:



Mapei SpA  
[www.mapei.it](http://www.mapei.it); Environmental Sustainability Office

Programme operator:



EPD International AB  
[info@environdec.com](mailto:info@environdec.com)

**Nonset 50**  
**Nonset 50 FF**  
**Nonset 50 SR**

**SEDE**  
**MAPEI SpA**  
Via Cafiero, 22 - 20158 Milano  
Tel. +39-02-37673.1  
Fax +39-02-37673.214  
Internet: [www.mapei.com](http://www.mapei.com)  
E-mail: [mapei@mapei.it](mailto:mapei@mapei.it)





## ANNEX 1

### ANNEX 1: Self declaration from EPD owner

#### Specific Norwegian requirements

#### 1 Applied electricity data set used in the manufacturing phase

The electricity mix for the electricity used in manufacturing (A3) is the electricity grid mix

<0,0356 kg CO<sub>2</sub> eqv/kWh>

#### 2 Content of dangerous substances

- The product contains no substances given by the REACH Candidate list or the Norwegian priority list.
- The product contains substances that are less than 0.1% by weight given by the REACH Candidate or the Norwegian priority list.
- The product contains dangerous substances more than 0.1% by weight given in the REACH candidate list or the Norwegian Priority List, concentrations is given in the EPD:

Dangerous substances from the REACH candidate list or the Norwegian Priority List	CAS No.	Quantity (concentration, wt%/FU(DU)).
Substance 1		
Substance n		

#### 3 Transport from the place of manufacture to a central warehouse

Transport distance, and CO<sub>2</sub>-eqv./DU from transport of the product from factory gate to central warehouse in Oslo shall be given. The following table shall be included in the EPD:

Type	Capacity utilisation (incl. return) %	Type of vehicle	Distance km	Fuel/Energy use	Unit	Value (l/t)	Kg CO <sub>2</sub> -equiv./DU
Boat							
Truck	85	27 tonn, EURO 3	95	0,0182	l/tkm	4,56	1,37E-02
Railway							
Rail							
Air							
Total	85	27 tonn, EURO 3	95	0,0182	l/tkm	4,56	1,37E-02

#### 4 Impact on the indoor environment

- Indoor air emission testing has been performed; specify test method and reference:
- No test has being performed
- Not relevant; specify : the products are morars ofr outdoor applications