



## PRODUCT SPECIFICATIONS

**SUPPLIER NAME:** BARLINEK S.A.

**PRODUCT DESCRIPTION:** Skirting boards profiles white, painted

**PRODUCT IDENTIFICATION:** The ELITE Collection

Profile name	Product code	Barcode	Catalogue no.
PW90	LIS-SOS-LB1-220-090-P90	5906737942697	P9027362A
PW70	LIS-SOS-LB1-220-070-P70	5906737942703	P7027362A
PW58	LIS-SOS-LB1-220-058-P58	5906737942710	P5827362A
PW46	LIS-SOS-LB1-220-046-P46	5906737942727	P4627362A

**1. MATERIAL / APPEARANCE**(Details of the components and their specifications / metals / plastic / colour / amount)

White skirting produced from carefully selected softwood, joined with micro-dovetails.

The decorative surface and the edge of the skirting boards are totally finished, protected by resistant, ecological white lacquer (RAL 9010). The decorative surface which is refined with UV lacquer subtly highlights the texture of wood, giving the board an ambience of exclusivity.

Additional information:

- the lacquer can be painted to any colour with water-based (solvent-free) lacquer
- the bottom edge is also impregnated with lacquer providing high stability and resistance to the humidity from the ground

**PW90 profile**


**PW70 profile**

**The room shot image (PW90)**



**PW58 profile**

**PW46 profile**

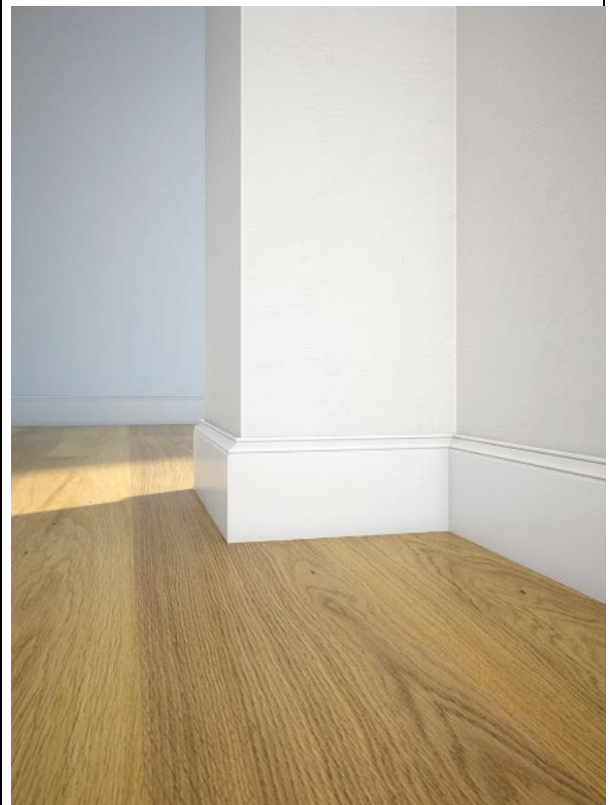

## 2. PRODUCT DIMENSIONS AND TOLERANCES

((Details of the dimensions of installed parts))

Profile	Length [mm]	Width [mm]	Height [mm]
PW90	2200 +/-10 mm	16 +/-0,5	90 +/-0,5 mm
PW70		16 +/-0,5	70 +/-0,5 mm
PW58		18 +/-0,5	58 +/-0,5 mm
PW46		16 +/-0,5	46 +/-0,5 mm

## 3. APPLICATION

The decorative element is masking the expansion gaps between the wall and the floor. Recommended for the wood floors.

## 4. INSTALLATION (manual / instructions for manual installation)

Wall installation: 1) adhesive 2) Barclip mounting clip

All internal and external corners are cut at an angle. It is recommended to use for this purpose the electric mitre saw with a fine toothed disc (no edge fraying).

In the case of curved wall, do not press it. The eventual gaps should be masked with the white acrylic (acrylic can be painted to the colour matching the colour of the walls, if they are not white). For more information please visit our web-site: [www.barlinek.com](http://www.barlinek.com).

## 5. LOGISTICS (Details of type of packaging / materials / warnings / HWL and transit packaging)

Board profile	skirting board dimensions [mm]	Weight 1pc [kg]	Number of boards in a box [pc]	Pack dimension H x W x L [mm]	Pack weight [kg]	Number of packages on pallet	full pallet dimension H x W x L [mm]	Pallet weight [kg]
PW46	16/46/2200	0,70	10	150/47/2200	7	64	750/800/2200	460
PW70	16/70/2200	1,04	10	150/70/2200	10	44	750/800/2200	472
PW58	18/58/2200	1,03	10	150/58/2200	10	52	750/800/2200	552
PW90	16/90/2200	1,43	10	160/90/2200	14	28	790/800/2200	414

## 6. Defect classification

1. Acceptable length deviation: due to the type of product, it is not subject to any particular limitations as this parameter has no influence on the installation. The board dimension tolerance is +/- 10mm
2. Main: Visible marks / cracking of the surface layer with a visible rough wood layer
3. Main: Lacquering defect / lack of lacquer coating on surface layer
4. Main: Product with scratching / denting of surface layer causing a lack of continuity in the lacquer layers
5. Main: Dirty or damaged product
6. Main: The code cannot be scanned / it is invalid
7. Main: Incorrect product/packaging – incorrect packaging label

PREPARED BY: BARLINEK S.A.

DATE: 2015-05-27