



WOOD


Tango



Product
Datasheet
2012

WOOD

Tango

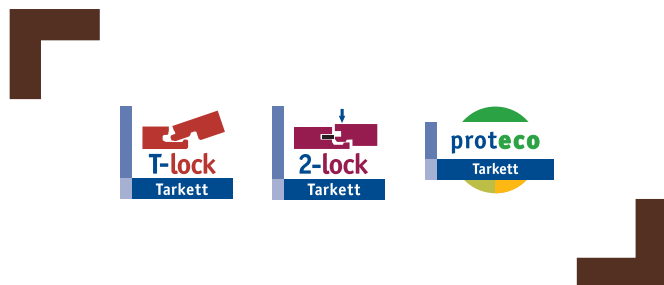

TECHNICAL INFORMATION	TANGO
Thickness	13 mm
Width	117/162/190
Length	1075/1245/2000/ 2200
Wearlayer thickness (mm)	app. 2,5
Weight (kg/m ²)	app. 7,3
Taber Abraser/Lacquer's wear resistance* prEN 13696	
abrasion penetration Proteco Lacq.(revs)	>4000
abrasion penetration Proteco Nat.(revs)	>3500
abrasive wear (mg/100revs)	app. 3,5
Reduction of sound weighted index index "footfall" to the room below. NF EN ISO 140-8 / Acc to NF EN ISO 717-2, ΔL _w in dB with 2 mm Tarkofoam/flex II	17
Formaldehyde emission EN 13986	E1
Reaction to Fire EN 13501	D _n
Thermal insulation value (RT m ² K/W)	
board only	0,101
with rag felt	0,121
with 2 mm Tarkofoam/flex II	0,141
Installation**	Floating / Glue down
Underfloor heating compatible***	Maximum floor surface temperature 27°C with self-regulating under-floor heat system.

* Data show results with new components according to 2006 update.
Method not applicable for stained or brushed products due to the structured surface.

** Contact your flooring supplier for further information.

*** Not suitable for the woodspecies beech and maple.

Tango Proteco Lacquer / Proteco Natura

TARKETT BALANCED CHOICE	98 % 98 %	100 %	 < 100µg/m ³ Better Indoor Air Quality *TVOC AT 28 DAYS
	Natural Renewable	Recyclable	

Wood floors, Brinell Hardness (BHN), EN1534

