



WOOD

Epoque Maxiplank



Product
Datasheet
2012

WOOD

Epoque Maxiplank



TECHNICAL INFORMATION	EPOQUE
Thickness	14 mm
Width	162/190
Length	2000-2520
Wearlayer thickness (mm)	app. 3,6
Weight (kg/m ²)	app. 8,0
Taber Abraser/Lacquer's wear resistance* prEN 13696	
abrasion penetration Proteco Lacq.(revs)	>4000
abrasion penetration Proteco Nat.(revs)	>3500
abrasive wear (mg/100revs)	app. 3,5
Reduction of sound weighted index index "footfall" to the room below. NF EN ISO 140-8 / Acc to NF EN ISO 717-2, ΔL _w in dB with 2 mm Tarkofoam/flex II	17
Formaldehyde emission EN 13986	E1
Reaction to Fire EN 13501	D _{fl}
Thermal insulation value (RT m ² K/W)	
board only	0,101
with rag felt	0,121
with 2 mm Tarkofoam/flex II	0,141
Installation**	Floating /Glue down
Underfloor heating compatible***	Maximum floor surface temperature 27°C with self-regulating under-floor heat system.

* Data show results with new components according to 2006 update. Method not applicable for stained, brushed or hardwax oiled products.

** Contact your flooring supplier for further information.

*** Not suitable for the woodspecies beech and maple.

Epoque Proteco Lacquer / Proteco Natura

TARKETT BALANCED CHOICE	97 % 97 %	100 %	Better Indoor Air Quality *TVOC AT 28 DAYS
	Natural Renewable	Recyclable	

Epoque Proteco Hardwax Oil

TARKETT BALANCED CHOICE	98 % 98 %	100 %
	Natural Renewable	Recyclable

EPOQUE	Lacquer 2-lock Minibevel	Natura 2-lock Maxibevel	
Plank, 14×2000–2520×190 mm. Bevel lengthwise.			
Oak Eu Nature	•	•	
Oak Eu Nature Cotton White		•	
Oak Eu Rustic brushed		•	
Oak Am Nature	•		
Oak Am Antique White brushed		•	
Oak Vintage Brown *		•	
Oak Vintage Light Hazel *		•	
Oak Vintage Olive *		•	
Oak Vintage Soft Grey		•	
* The surface is meant to be rough and uneven. Scratches, cracks etc are natural elements of this product.			
	Lacquer 2-lock Minibevel	Natura 2-lock Maxibevel	Hardwax Oil 2-lock Minibevel

	Lacquer 2-lock Minibevel	Natura 2-lock Maxibevel	Hardwax Oil 2-lock Minibevel
Plank, 14×2000–2520×162 mm. Bevel lengthwise.			
Oak Eu Nature	•	•	•
Oak Eu Rustic brushed	◦	•	•
Oak Eu Rustic Satin White			•
Oak Eu Rustic Hazel Brown			•
Oak Eu Rustic Umber Brown			•
Oak Eu Rustic Anthracite Grey			•
Oak Eu Rustic Indium Grey			•
Oak Black brushed		•	
Oak Java Gold brushed		•	
Oak Am Nature		•	
Oak Am Antique brushed		•	
Oak Am Antique White brushed		•	
Oak Misty Grey brushed		•	
Oak Sandy Grey brushed		•	
Oak Evening Grey brushed		•	
Oak Stone Grey brushed		•	
Oak Winter brushed		•	
Oak Cumin		•	
Oak Praline brushed		•	
Oak Rustic Light Hazel brushed		•	
Oak Grey Contrast brushed *		•	
Oak Patine White brushed *		•	
Oak Aubergine brushed *		•	
Oak Dark Copper brushed *		•	
Ash White		•	
Ash White Pearl brushed	•		
Ash Robust White		•	
Ash Cognac	•		
Ash Cognac brushed		•	
Beech Steamed	•		
Merbau	•		
Jatoba	•		
◦ Unfinished * Minibevel			

Wood floors, Brinell Hardness (BHN), EN1534




www.tarkett.com



WOOD

Epoque
Miniplank



Product
Datasheet
2012

WOOD

Epoque Miniplank




TECHNICAL INFORMATION	EPOQUE
Thickness	14 mm
Width	117
Length	1075/1245
Wearlayer thickness (mm)	app. 3,6
Weight (kg/m ²)	app. 8,0
Taber Abraser/Lacquer's wear resistance* prEN 13696	
abrasion penetration Proteco Lacq.(revs)	>4000
abrasion penetration Proteco Nat.(revs)	>3500
abrasive wear (mg/100revs)	app. 3,5
Reduction of sound weighted index index "footfall" to the room below. NF EN ISO 140-8 / Acc to NF EN ISO 717-2, ΔL _w in dB with 2 mm Tarkofoam/flex II	17
Formaldehyde emission EN 13986	E1
Reaction to Fire EN 13501	D _{f1}
Thermal insulation value (RT m ² K/W)	
board only	0,101
with rag felt	0,121
with 2 mm Tarkofoam/flex II	0,141
Installation**	Floating /Glue down
Underfloor heating compatible***	Maximum floor surface temperature 27°C with self-regulating under-floor heat system.

* Data show results with new components according to 2006 update.
Method not applicable for stained, brushed or hardwax oiled products.

** Contact your flooring supplier for further information.


*** Not suitable for the woodspecies beech and maple.

Epoque Proteco Lacquer / Proteco Natura



EPOQUE	Lacquer 2-lock l: 1245mm	Natura 2-lock l: 1245mm	Lacquer 2-lock l: 1075mm	Natura 2-lock l: 1075mm
Miniplank, 14x117 mm. Minibevél lengthwise.				
Oak Nature	•	•	•	
Oak Nature brushed	•			
Oak Rustic brushed	•	•		•
Oak White		•		•
Oak Java Gold brushed		•		•
Oak Cotton White		•		
Oak Patina White brushed		•		
Oak Stone Grey brushed		•		
Oak Praline brushed		•		
Beech Steamed	•		•	
Merbau	•		•	
Jatoba	•		•	

Wood floors, Brinell Hardness (BHN), EN1534

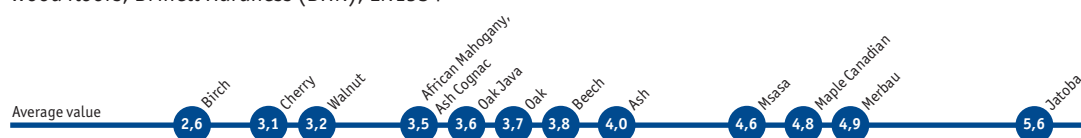



WOOD

Epoque
2-strip

Product
Datasheet
2012

WOOD

Epoque 2-strip



TECHNICAL INFORMATION	EPOQUE
Thickness	14 mm
Width	200
Length	2520
Wearlayer thickness (mm)	app. 3,6
Weight (kg/m ²)	app. 8,0
Taber Abraser/Lacquer's wear resistance* prEN 13696	
abrasion penetration Proteco Lacq.(revs)	>4000
abrasion penetration Proteco Nat.(revs)	>3500
abrasive wear (mg/100revs)	app. 3,5
Reduction of sound weighted index index "footfall" to the room below. NF EN ISO 140-8 / Acc to NF EN ISO 717-2, ΔL _w in dB with 2 mm Tarkofoam/flex II	17
Formaldehyde emission EN 13986	E1
Reaction to Fire EN 13501	D _{f1}
Thermal insulation value (RT m ² K/W)	
board only	0,101
with rag felt	0,121
with 2 mm Tarkofoam/flex II	0,141
Installation**	Floating /Glue down
Underfloor heating compatible***	Maximum floor surface temperature 27°C with self-regulating under-floor heat system.

* Data show results with new components according to 2006 update.
Method not applicable for stained, brushed or hardwax oiled products.

** Contact your flooring supplier for further information.

*** Not suitable for the woodspecies beech and maple.

Epoque Proteco Lacquer / Proteco Natura

TARKETT BALANCED CHOICE	97 % 97 %	100 %	Better Indoor Air Quality *TVOC at 28 DAYS
	Natural Renewable	Recyclable	

EPOQUE	Lacquer 2-lock	Natura 2-lock
Plank, 14×2520×200 mm.		
Oak Nature	•	•
Oak Rustic brushed		•
Oak White brushed		•
Oak Java brushed		•
Ash Cognac brushed		•
Ash White		•

Wood floors, Brinell Hardness (BHN), EN1534

