
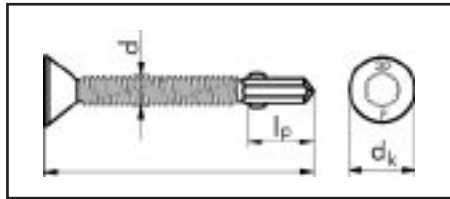


FDV-dokumentasjon

Produkt: 021986350 003 50

Z-VINGEPIAS H12 M/FRES
6,3X 50

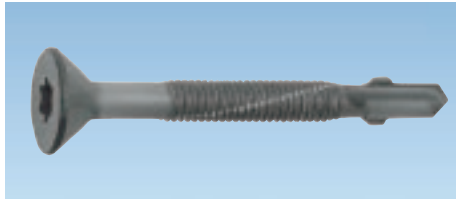

Diameter Ød mm	Lengde l mm	Art. nr.	Pk./stk.
6	45	0219 763 45	500
	60	0219 763 60	
	80	0219 763 80	250
	100	0219 763 100	


Diameter d	6
Hodediameter d _k	15
Borlengde l _p	13
Spor	AW 30
Borområde	1,75-6,0

Zebra vinge-pias W-219

For montering av trevirke til stålkonstruksjoner

Senkhode Ø 15 mm

- Stål
- Ruspert overflatebehandling

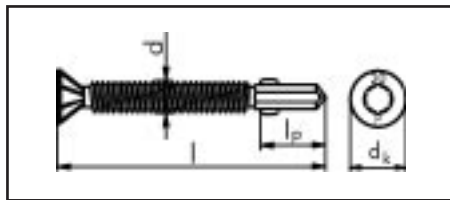

Diameter Ød mm	Lengde l mm	Art. nr.	Pk./stk.
6	45	0219 663 45	500
	50	0219 663 50	
	60	0219 663 60	
	65	0219 663 65	
	80	0219 663 80	250
	100	0219 663 100	

Diameter d	6
Hodediameter d _k	15
Borlengde l _p	13
Spor	AW 30
Borområde	1,75-6,0

Senkhode med freseriller

- Stål
- Ruspert overflatebehandling

Diameter Ød mm	Lengde l mm	Art. nr.	Pk./stk.
6	45	0219 863 45	500
	50	0219 863 50	
	55	0219 863 55	
	60	0219 863 60	
	65	0219 863 65	250
	70	0219 863 70	
	80	0219 863 80	
	85	0219 863 85	
	90	0219 863 90	
	100	0219 863 100	

Diameter d	6
Hodediameter d _k	12
Borlengde l _p	13
Spor	AW 30
Borområde	1,75-6,0

Diameter Ø mm	Lengde l	Materialtykkelse tre		Materialtykkelse Stål	
		Minimum mm	Maksimum mm	Minimum mm	Maksimum mm
5,5	38	6	22	1,75	5
	45		29		
	50		34		
	55	12	39		
	60		44		
	70		54		
6/6,3	32	6	12	1,75	6
	45		24		
	50	11	29		
	55		34		
	60	17	39		
	65	22	44		
	70		49		
	80		59		
	85	24	64		
	100		79		