


Hexagon nut, low profile, with clamping piece (non-metal insert)

DIN 985, plain A4 stainless steel

Standards	DIN 985
Material	Stainless steel A4
Surface	Plain
RoHS-compliant	Yes
Form	Low
Locking device operating principle	Clamping part polyamide ring
Locking function	Locking against losing by clamping

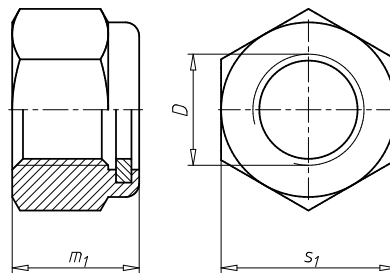

Thread type x nominal diameter (D)	Height (m ₁)	External drive (s ₁)	Art. no.	P. Qty.
M3	4 mm	WS5.5	0397 3	100/1000
M4	5 mm	WS7	0397 4	100/1000
M5	5 mm	WS8	0397 5	100/1000
M6	6 mm	WS10	0397 6	100/1000
M8	8 mm	WS13	0397 8	100/300 /1000
M10	10 mm	WS17	0397 10	50/500
M12	12 mm	WS19	0397 12	50/200
M14	14 mm	WS22	0397 14	50/100
M16	16 mm	WS24	0397 16	50/100
M18	18.5 mm	WS27	0397 18	50
M20	20 mm	WS30	0397 20	50
M22	22 mm	WS32	0397 22	75
M24	24 mm	WS36	0397 24	25
M27	27 mm	WS41	0397 27	25
M30	30 mm	WS46	0397 30	25

Notice

DIN 985 has been withdrawn and replaced by ISO 10511. There is some limited similarity (thread M7, M18, M22, M27, M33 and threads with nominal diameter > M36 removed | Fine thread removed | Nut height changed | Width across flats changed

for threads M10, M12 and M14 to 16, 18 and 21 mm | Strength classes changed to 04 and 05).