

# FDV-dokumentasjon

Produkt: 05555161 005 25

SKJØTEMUFFE VANNTETT  
0,5-1,00 RØD

# Vanntette kabelsko med lim




## Skjøt

Kabel tversnitt mm <sup>2</sup>	Art. nr.	Pk./stk.
0,25 - 0,75	<b>0555 516 0</b>	25/100
0,5 - 1,5	<b>0555 516 1</b>	
1,5 - 2,5	<b>0555 516 2</b>	
4 - 6	<b>0555 516 4</b>	

## Anvendelse


- m/lim
- Klemmes med vanlig klemtang
- Bruk varmekilde for krymping

## Kabelsko han

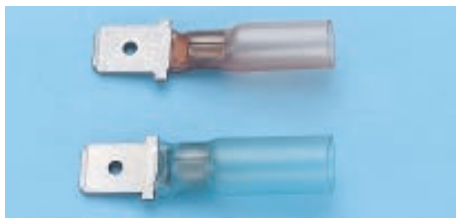

Kabel tversnitt mm <sup>2</sup>	Art. nr.	Pk./stk.
0,5 - 1,5	<b>0555 944 1</b>	25/100
1,5 - 2,5	<b>0555 945 2</b>	

## Kabelsko hun

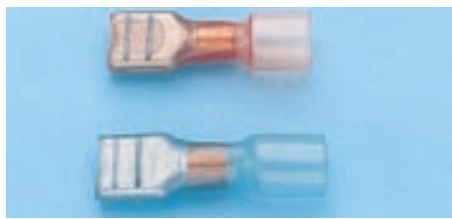

Kabel tversnitt mm <sup>2</sup>	Art. nr.	Pk./stk.
0,5 - 1,5	<b>0555 905 1</b>	25/100
1,5 - 2,5	<b>0555 905 2</b>	



Hull Ø mm	Ledning Ø mm		Bunt Ø max.	Art. nr.	Pk./stk.
	min.	max.			
4,0	1,2	3,0	5,0 mm	<b>0555 925 24</b>	25
6,0				<b>0555 925 26</b>	
6,0	2,5	6,6	6,5 mm	<b>0555 925 36</b>	
8,0				<b>0555 925 38</b>	
6,0	6,0	11,2	9,0 mm	<b>0555 925 46</b>	
8,0				<b>0555 925 48</b>	


# Loddeskjøter

Lager en fast forbindelse - lodder, tetter og krymper i samme operasjon



## Skjøt

Kabel - Ø max	Art. nr.	Pk./stk.
1,0 mm	<b>0555 923 0</b>	25/100
2,7 mm	<b>0555 923 1</b>	
4,5 mm	<b>0555 923 2</b>	
6,0 mm	<b>0555 923 3</b>	

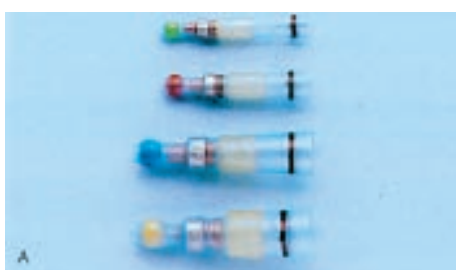

## Endekobling

Vanntett	Ledning Ø mm		Bunt Ø max.	Art. nr.	Pk./stk.
	min.	max.			
Med lim	0,7	2,4	3,3 mm	<b>0555 924 10</b>	10/25
	2,0	4,0	4,5 mm	<b>0555 924 20</b>	
	3,5	8,0	7,5 mm	<b>0555 924 30</b>	
	7,5	12,0	9,0 mm	<b>0555 924 40</b>	