

Environmental Product Declaration



EAA - European Aluminium Association
Av. de Broqueville 12
B-1150 Brussels
www.aluminium.org



Sapa Building Systems Växjö AB
Grusåsvägen 10
352 45 Växjö Sweden
order.hbsab@wicona.com www.wicona.no

Producer

EAA-K/20252-EN

Declaration number

16.06.2017

Date of issue

Declared product

The declared product is specified by the profile series, product name, product characteristics and section shown in the EPD document. It can consist of various building materials and related accessories.

Product type

This validated declaration applies to the above mentioned products for three years from date of issue. The producer is liable for the information and evidence on which the declaration is based. EAA and Hydro Building Systems are not liable for the user input relevant for the declaration. A long version of the EPD can be obtained from the producer.

Validity

This EPD is based on information modules that do not cover all aspects of the product's use. An environmental assessment of a product has to consider also the product's application in the building and the respective environmental aspects during the use phase.

Comparability

The EPD is based on the PCR for Aluminium Building Products of the EAA Environmental Product Declaration Program. The PCR document is available from the EAA webpage www.aluminium.org.

Product Category Rules

Table 1: Verification information

Verification

Review of the PCR document by the independent Advisory Board. Chair of the Advisory Board: Dr. Eva Schmincke

Independent verification of the calculation system and the data the declaration is based on according to ISO 14025:2006 [] - Internal Verification [x] - External Verification

Verifier of the declaration tool: Dr. Eva Schmincke




Producer: Sapa Building Systems Växjö AB
 Declaration number: EAA-K/20252-EN

Date of issue
 16.06.2017

1 Description of the product

Product description



Product characteristics

Construction size

Amount: 1
 Width: 1558.00 mm
 Height: 2625.00 mm

Transparent area

Transparent area: npd

Surface

Surface treatment: powder coating / anodized

Total weight of the construction

Mass: 142.7 kg


Characteristics of the construction

Thermal transmittance (uw-value)[W/m²*K]: npd
 Light transmittance value of glass (TL)[%]: 1 / 1 / 1
 Solar factor (g-value)[%]: npd
 Burglar resistance: npd
 Acoustic performance [dB]: npd
 Resistance to fire: npd
 Air permeability: npd

According to EN 14351-1: npd - no performance determined

Characteristics provided by producer

Profile system



The product is usually applied incorporated in the wall of buildings or act as a wall itself in order to provide functions such as air exchange and light transmission.

Range of application

Fönster och dörrar: EN 14351-1 Fasad: EN 13830

Product standard / technical approval

This EPD considers the following life cycle stages:

Life cycle stages



Producer:	Sapa Building Systems Växjö AB	Date of issue
Declaration number:	EAA-K/20252-EN	16.06.2017

- Material production, component production and surface treatment
- Transports to manufacturer
- Assembly of the product
- Transport to building site
- Cleaning and maintenance
- Demolition/disassembly of the product
- Transport to recycling site
- Recycling of the product and disposal of the residues

The part of the use stage which only can be determined in relation to a specific building, such as heat losses or solar gains, is not included in this EPD.

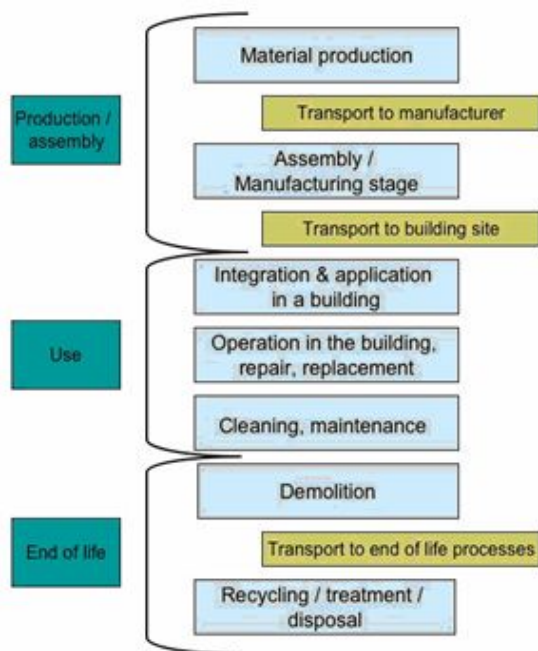


Figure 1: Life cycle stages



Producer:	Sapa Building Systems Växjö AB	Date of issue
Declaration number:	EAA-K/20252-EN	16.06.2017

2 Components / Materials

Table 2: Components of the product

Components of the product

GV01-6.09			
Type of element	Element definition	Material	Description
Frame and sash	System [PROFILE SYSTEM]	EN AW-6060	EN AW-6060
		PA 6.6 , 25%GF	PA 6.6 , 25%GF
		Pulverbeläggning	Pulverbeläggning
		Förbehandling	Förbehandling
		Anodiserad	Anodiserad
		Ethylene Propylene Diene Monomer	Ethylene Propylene Diene Monomer
		Acrylonitrile Butadiene Styrene	Acrylonitrile Butadiene Styrene
Glass and panel	Infill	EN AW-6060	EN AW-6060
		Pulverbeläggning	Pulverbeläggning
		Förbehandling	Förbehandling
		Float glass	Float glass
Gasket	Gaskets	Ethylene Propylene Diene Monomer	Ethylene Propylene Diene Monomer
Fittings and accessories	Hardware unit components	1.4301	1.4301
		PA polyamide	PA polyamide
		PA 6.6 , 25%GF	PA 6.6 , 25%GF
		EN AW-6060	EN AW-6060
		Ethylene Propylene Diene Monomer	Ethylene Propylene Diene Monomer
		Standard fitting material	Standard fitting material
		Acrylonitrile Butadiene Styrene	Acrylonitrile Butadiene Styrene

This table contains all materials relevant for the calculation according to the cut-off rules. Handles and fittings are not considered in the life cycle stages.

Please refer to Material Safety Data Sheet.

Hazardous substances

According to the state of the art permits, the manufacturer shall establish those materials in the product which are liable to emission or migration during normal intended use and for which emission or migration into the environment is potentially dangerous to hygiene, health or the environment. The manufacturer shall establish and make the appropriate declaration of content according to the legal requirements in the intended country of destination.

An informative database of European and national provisions on dangerous substances is available at the Construction web site on EUROPA (accessed through http://ec.europa.eu/enterprise/construction/internal/dangsub/dangmain_en.htm)



Producer:	Sapa Building Systems Växjö AB	Date of issue
Declaration number:	EAA-K/20252-EN	16.06.2017

3 Additional information on production and assembly

Aluminium:

Aluminium Primary Production

The common raw material for aluminium production, bauxite is composed primarily of one or more aluminium hydroxide compounds, plus silica, iron and titanium oxides as the main impurities. It is used to produce aluminium oxide through the Bayer chemical process and subsequently aluminium through the Hall-Heroult electrolytic process. On a world-wide average 4 to 5 tonnes of bauxite are needed to produce two tonnes of alumina, from which one tonne of aluminium can be produced. In Europe, the average bauxite consumption is 4.1 tonnes per tonne of aluminium. Then 140 million tonnes of bauxite are mined each year. The major locations of bauxite deposits are found in a wide belt around the equator.

Bauxite has to be processed into pure aluminium oxide (alumina) before it can be converted to aluminium by electrolysis. This is achieved through the use of the Bayer chemical process in alumina refineries.

Primary aluminium is produced in reduction plants (or "smelters"), where pure aluminium is extracted from alumina by the Hall-Hérout process. The reduction of alumina into liquid aluminium is operated at around 950 degrees Celsius in a fluorinated bath under high intensity electrical current. There are currently two types of smelter technology in use depending on the type of anode. All potlines built since the early 1970s use the prebake anode technology, where the anodes, manufactured from a mixture of petroleum coke and coal tar pitch (acting as a binder), are 'pre-baked' in separate anode plants. In the Soederberg technology, the carbonaceous mixture is fed directly into the top part of the pot, where 'self-baking' anodes are produced using the heat released by the electrolytic process.

Liquid aluminium, possibly after addition of alloying elements, is cast into ingot through DC (Direct chill) casting.

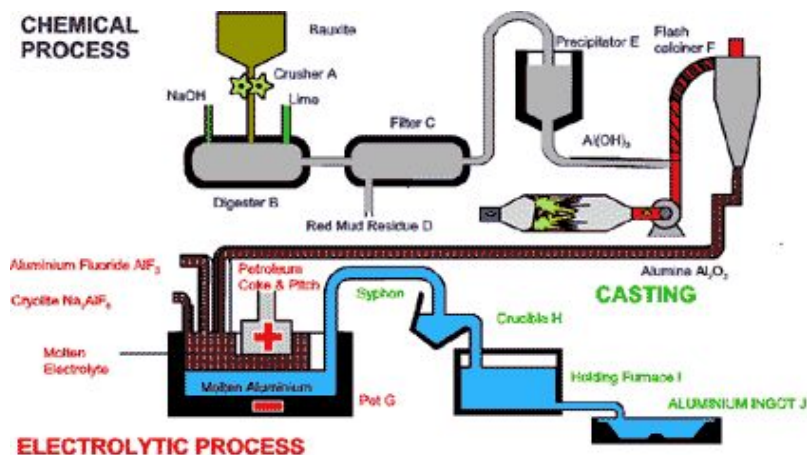


Figure 2: Aluminium primary production, source /EAA 2006/

Extruded Aluminium products

Aluminium profiles are produced through the extrusion process. These profiles are produced from aluminium ingots called billets (usually cylinders) which are pressed at hot temperature (400-500°C) through shaped dies. Aluminium billets are produced by DC (Direct Chill) casting in cast houses. Primary and recycled aluminium as well as alloying elements (Mg, Si, etc.) are used for producing

Availability, extraction and origin of materials



Producer:	Sapa Building Systems Växjö AB	Date of issue
Declaration number:	EAA-K/20252-EN	16.06.2017

aluminium billets (for more details about aluminium production processes, please visit www.aluminium.org). resulting profile is stretched and cut into pieces of fixed length which are heat treated in order to obtain the required mechanical properties by age hardening. Afterwards they undergo a chemical pre-treatment process followed by powder coating.

The information module by which this process chain is modelled for the LCA includes the recycling of production scrap.

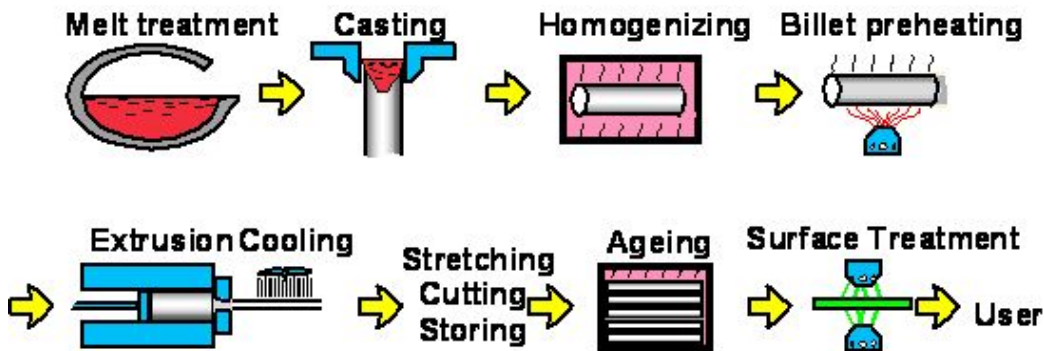


Figure 3: Typical production chain of aluminium extrusions, source /EAA 2006/

Surface treatment:

Anodising

Pre-treatment and Powder

Float glass:


Raw materials

The mix of raw materials used in the production of flat glass is known as the batch, which is mainly composed of three components: silica sand, soda ash and dolomite/limestone. In addition recycled glass (cullet) is used in the fabrication of flat glass and represents on average 15 per cent of the materials used. Its addition helps reduce the energy required in the process. Silica sand, soda ash, dolomite and dolomite/limestone represent together 99 per cent of all raw materials used in the production of glass, excluding the recycled glass. The remaining ingredients aid the melting and refining (bubble removal) reactions and impart colour and there is water addition during batch mixing to prevent subsequent segregation. Silica sand is the main component of the batch as it constitutes about 62 per cent of the batch weight (excluding recycled glass). Soda ash is one of the most expensive raw materials used in glass manufacturing and represents about 16 per cent of the batch weight.

Production process

When charged to the oven, the raw materials are weighed electronically, blended and moistened. They then constitute a vitrifiable load which, after the addition of cullet (melted scraps of glass) is transferred to the oven. The oven (tank) is made of refractory (material resistant to very high temperatures), which can hold up to 2000 tonnes of molten glass (largest ovens), taken up to a temperature of 1550 °C.

At a temperature of 1100 °C, the glass melted in the oven is cast onto a bath of molten tin, the floating step. The glass, which is then floating on an even liquid surface, is drawn out in a ribbon. On the edges of the ribbon, toothed cogs (toprolls) are placed, which stretch or push back the glass from the side, depending on the required thickness. This thickness currently varies between 1.1 mm and 19



Producer:	Sapa Building Systems Växjö AB	Date of issue
Declaration number:	EAA-K/20252-EN	16.06.2017

mm. Thin glass is needed for lamination for the car industry, in order to reduce the weight of vehicles, and also for applications in the area of electrical goods; while thick glass is particularly used for safety and decoration.

The glass then needs to cool down. To this end, it passes along the rollers of a cooling tunnel (known as the "lehr") 100 meters long. Placed at 600 °C at the outset, it ends its "travel" at ambient temperature. And it is at around 500 °C that it acquires its definitive properties.

Placed on a square-cutter, the glass ribbon, which ends the cooling process in the open air, is then checked and cut into sheets (6 m x 3 m is a common dimension in Europe). The edges are trimmed automatically. The sheets of glass are then placed vertically on trestles, with the help of uprighters with suction cups.

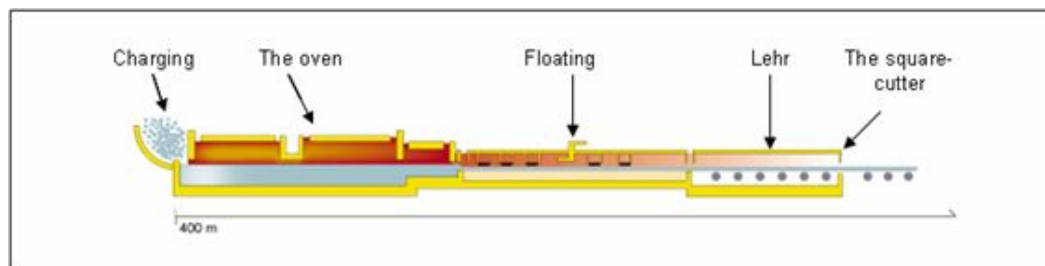


Figure 4: Production of float glass, source /saint-gobain-vitrage/

Polyamide 6.6 GF:

Polyamide 6.6 is produced from hexamethylene diamine and adipic acid via AH-salt.

Hexamethylene diamine is made when butadiene and hydrogen cyanide (HCN) react at 80°C with a catalyst. After a separation step butadiene- and HCN components, which have not reacted, were recycled. The resulting blend of isomeric pentene nitrile and methylbutene nitrile is isomerised predominantly to 3- and 4-pentene nitriles. In a second stage adiponitrile is produced by HCN-addition. Adiponitrile is hydrogenated with hydrogen under high pressure conditions to hexamethylene diamine.

The technical privileged route to adipic acid is the oxidation breakdown of the cyclohexane. Therefore the production is caused by two steps via cyclohexanole and cyclohexanone. Oxidation of cyclohexane runs by 125-165°C and 8-15bar in the liquid phase with air (and Mn- or Co-salts) as catalyst to anole-anone mixture. Primary product of the free radical reaction is cyclohexylhydroperoxide, which react further to anole-anone. Simultaneous some adipic acid has been builded already. The cyclohexane conversion is set to 10-12% (high selectivity of 80-85% to anole-anone). Afterwards distillation of the remaining cyclohexane and recirculation to oxidation process. The acids are washed out with alkali and the ester is hydrolised.

For the production of glass fibres the glass raw materials are melted (alternative: gas or electrical tank) and extended to fibres by nozzle blowing-, centrifugal casting or nozzle drawing process and coated.

EPDM:

Basic materials for the EPDM production are propylene and ethylene fractions. There are existing different processes for polymerisation, which the vapour phase process, the solution process and emulsion process were the most important.

For the production of the products ethene and propylene, naphtha and LNG are split by a steam cracker. Beside ethylene and propylene, C4-cut, pyrolysis gas, pyrolysis tar, fuel gas and hydrogen are further products from this split.



Producer:	Sapa Building Systems Växjö AB	Date of issue
Declaration number:	EAA-K/20252-EN	16.06.2017

Steel:

The mining and beneficiation is done in countries, with an import specific share in the European import mix. The transportation processes are taken into account for each share, as well as the import mix for the pellets is considered in the balance. Iron ore, pellets, sinter feed and additives are fed into the blast furnace (charge mixture). The raw iron is further on fed into the oxygen blow converter. The following processes are the secondary metallurgy and the continuous casting. The balances for the processes, from the sintering process until the steel ingot, are based on the German standard.

Assemblage of product:

The components, specifically the aluminium profiles which are already surface treated and connected with the thermal bars, are cut and tailored to the respective frame size. The residual aluminium profiles are preserved for recycling. Together with the fl

The assemblage is placed in Sweden.

Manufacturing

Product packaging

Usually the product is not packaged. In rare cases a PE plastic wrap for protection is applied. The plastic foil is fed to the regional municipal waste collection system.

Packaging

Transport packaging

The packaged products are placed in transport carriers and are placed on Euro-pallets. For transport to the building site a reusable carrier is applied.

There are no relevant aspects of occupational health and safety during the production of this building product.

Occupational health and safety during production

4 Additional information concerning integration and application in a building

Refer to information brochures for installation instructions.

Referrals and auxiliary materials for installation

There are no relevant aspects of occupational health and safety during the installation of the product.

Occupational health and safety during installation

Only proper installation can guarantee the technical properties, which is relevant during the operation stage of the building.

Environmental aspects

No residual materials occur at the building site.

Residual material at the building site

5 Additional information for modelling the use stage



Producer:	Sapa Building Systems Växjö AB	Date of issue
Declaration number:	EAA-K/20252-EN	16.06.2017

There are no aspects concerning environment and health related to the use of the building product.

Aspects on environment and health

A service life of 50 years is used for calculations.

Service life

Periodical cleaning and maintenance are basis for a long service life of a building envelope. Cleaning agents must be neutral (ph-value 5-8).

Maintenance

Maintenance (checking and greasing) of the hardware components every 2 years is recommended.

No external influences on the durability are relevant.

External influences on durability

No special influences are relevant.

Special influences

6 Additional information for end of life processes

The end-of-life operations consist of three steps, namely

End-of-life treatment

- demolition;
- shredding and / or sorting;
- remelting / incineration / land fill

The demolition takes place either at building site or after transport of de-installed products at a recycling plant. The demolition usually destroys the float glass, 95 % of it goes for material recycling, the balance is land-filled. It is assumed that the recycled glass displaces the identical mass of raw material for the glass production. The aluminium frame together with the polymers and hardware components are going for the next recycling step without losses.

After the shredding operation the steel fraction is removed by magnetic sorting with an efficiency of 95%. Plastics are separated from aluminium by eddy current sorting machines with an efficiency of 90%. Plastics are sent to incineration with energy recovery.

As the third step of the end-of-life operations, the recovered aluminium scrap will be re-melted to extrusion ingots of the same inherent properties as the ingots from which the profiles have been produced. A net metal yield of 98 % is assumed.

All together, a recycling rate of 93% is obtained. This figure includes the collection rate (assumed to be 96%), the metal losses during shredding and/or sorting, and the re-melting.

Recycled aluminium is credited in this EPD as substituting primary aluminium. As illustrated in fig.6, only aluminium losses in each stage need to be balanced by primary aluminium.

The following figure 5 illustrates the substitution methodology at the example of the life cycle of an aluminium building product.

Recycling



Producer:	Sapa Building Systems Växjö AB	Date of issue
Declaration number:	EAA-K/20252-EN	16.06.2017

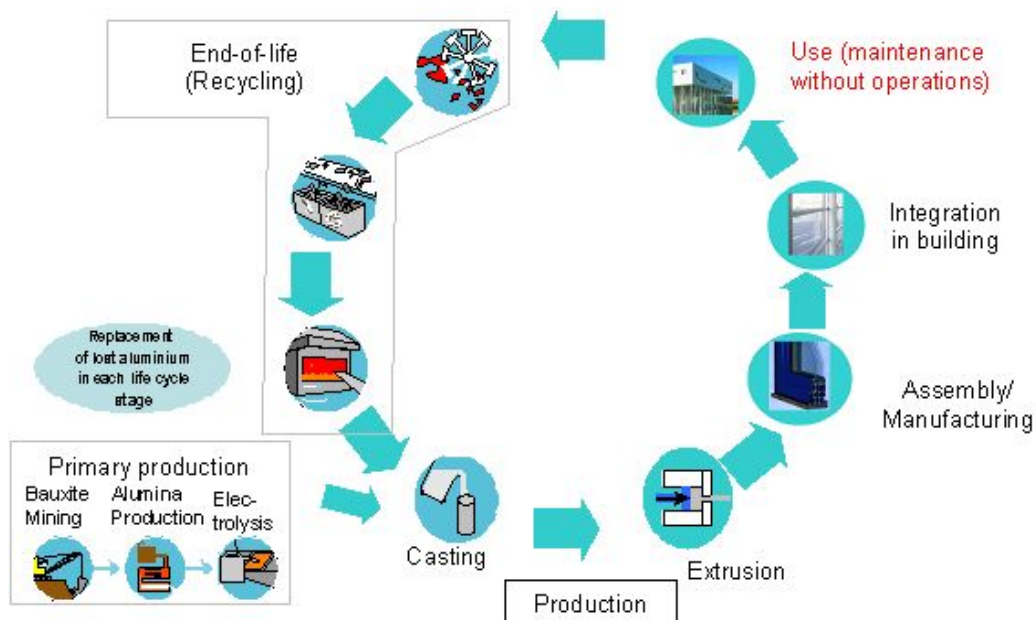


Figure 5: Substitution methodology illustrated for the Life cycle of an aluminium window frame, source /EAA 2006/

Since most materials of the building product are recycled, only a small amount and the losses from the recycling processes have to be landfilled.

Disposal

7 Life cycle assessment

7.1 LCA documentation

Declared unit:

Declared unit

The declared product is specified by the profile series, product name, product characteristics and section shown in the EPD document. It can consist of various building materials and related accessories.



Producer:	Sapa Building Systems Växjö AB	Date of issue
Declaration number:	EAA-K/20252-EN	16.06.2017

Table 3: Material composition of the entire building product (basis for LCA calculation)

Material	Weight of the material in all components of the product
1.4301	0,15 kg
Acrylonitrile Butadiene Styrene	1,90 kg
Anodiserad	0,88 kg
EN AW-6060	41,43 kg
Ethylene Propylene Diene Monomer	1,79 kg
Float glass	88,12 kg
Förbehandling	0,00 kg
PA 6.6 , 25%GF	7,05 kg
PA polyamide	0,34 kg
Pulverbeläggning	0,00 kg
Standard fitting material	1,94 kg

Description of the life cycle:

- production and transport to the building site
- installation and maintenance (cleaning)
- demolition, transport to recycler, shredder, material recycling of aluminium, glass, and ferrous metals, incineration with energy recovery of thermal bars and gaskets, all other components and residues go to landfill

System boundaries

The following recovery rates for demolition and shredder are determined and basis for the calculation of the LCA:

- Aluminium 96%
- Steel, stainless steel and zinc: 95%
- Glass: 95%
- Thermal bars and gaskets: 90%
- All other materials: 0%

All materials with recovery rates above 0% are recycled, the demand of energy and auxiliary materials is accounted in the end of life stage. The gained secondary material is used (and calculated) in production. Recycled aluminium is credited by the substitution methodology. For more details about this methodology, please refer to the EAA document Aluminium recycling in LCA which can be downloaded at www.aluminium.org (see sections EHS > LCA > Recycling).

Allocation

All material flows that enter the system on the input side and whose contribution is more than 1% of the total mass or more than 1% to the primary energy use were considered. All material flows, which exit the system on the output side and whose environme

Cut-off criteria

The representativity and data sources of the used data are shown in the table below. Geographical coverage of the data is Europe.

Data quality



Producer:	Sapa Building Systems Växjö AB	Date of issue
Declaration number:	EAA-K/20252-EN	16.06.2017

Table 4: Representativity of the LCA data

Data quality			
Material / process	Geographical representativity	Time coverage	Data source
Aluminium	high	2002	EAA
Surface treatment	medium	1995	GaBi 4
Glass	medium	2000	Ecoinvent
Thermal bars	high	1995	GaBi 4 / industry
Gaskets	medium	1995	GaBi 4 / industry
Steel / stainless steel	high	2000	Eurofer
Window assembly	medium	1995	GaBi 4 / industry
Use phase	medium	2005	GaBi 4
EOL / demolition & shredder	high	1995	GaBi 4 / industry
EOL / recycling of metals	high	2002	EAA / GaBi 4 / industry
EOL / incineration	high	2005	GaBi 4

Geographical coverage is Europe.

7.2 Life Cycle indicators

The tables and graphs below are showing aggregated results of the life cycle inventory and results from the impact assessment.

Life Cycle Inventory

Table 5: Primary energy consumption of the life cycle of the declared aluminium product

GV01-6.09					
Primary energy consumption	Unit per product	Total Life Cycle	Production	Use	End of Life
Primary energy, non-renewable	[MJ]	5239	4020	97,28	1122
Primary energy, renewable	[MJ]	519,1	456	0,7005	62,34

Primary energy is a measure for the consumption of non renewable (fossil and nuclear) and renewable (water and wind power, solar and biomass) energy resources. The availability of non renewable resources is limited.



Producer: Sapa Building Systems Växjö AB
 Declaration number: EAA-K/20252-EN

Date of issue
 16.06.2017

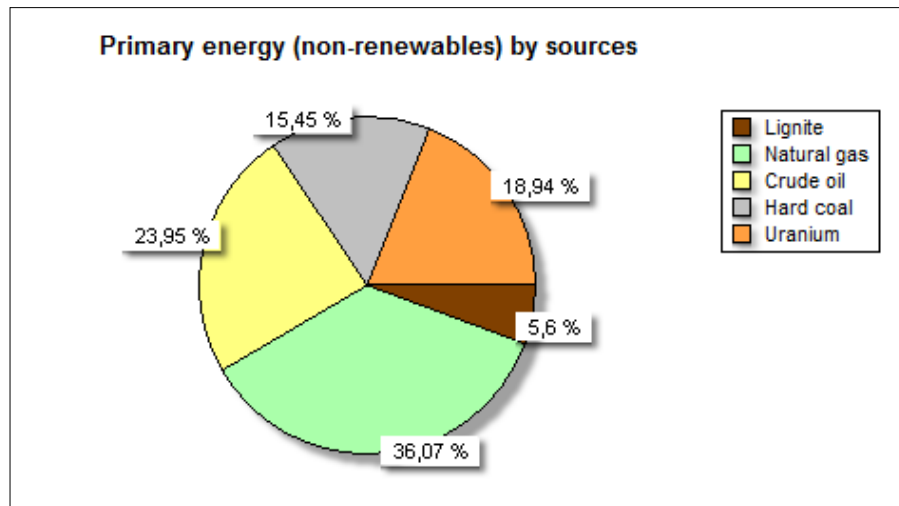


Figure 6: Breakdown of the use of non-renewable primary energy by energy sources for production, use and end of life of the declared building product

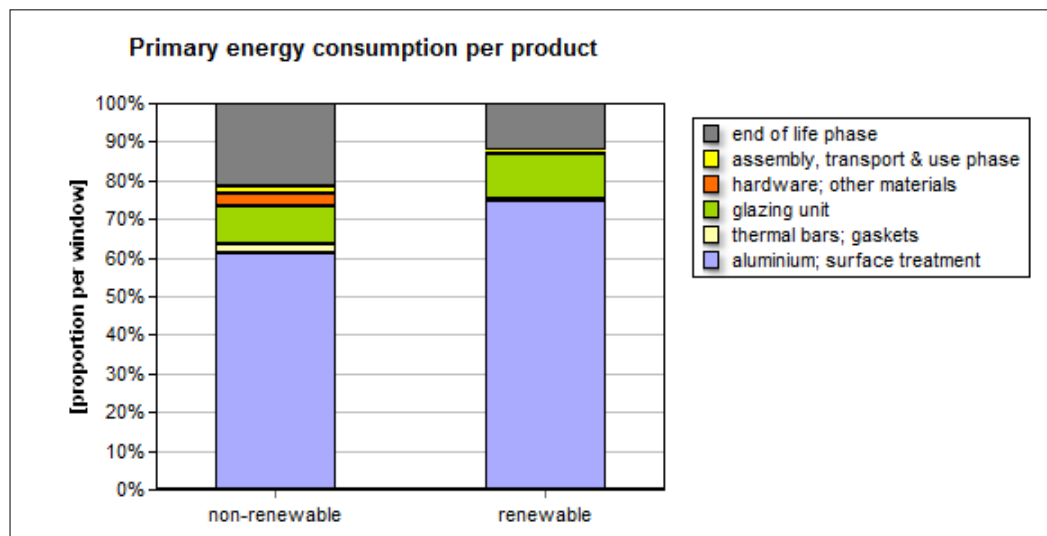


Figure 7: Breakdown of the use of non-renewable primary energy by energy sources for production, use and end of life of the declared building product



Producer:	Sapa Building Systems Växjö AB	Date of issue
Declaration number:	EAA-K/20252-EN	16.06.2017

Table 6: Water consumption for the life cycle of the declared aluminium product

GV01-6.09					
Water consumption	Unit per product	Total Life Cycle	Production	Use	End of Life
Water consumption	[kg]	8151	7721	162,9	347,3

The amount of waste and residues are technical figures, they do not describe an environmental impact which could be caused by waste treatment.

Table 7: Waste produced during the life cycle of the declared aluminium product

GV01-6.09					
Waste	Unit per product	Total Life Cycle	Production	Use	End of Life
Non hazardous waste	[kg]	20,61	6,98	0,05074	13,58
Hazardous waste	[kg]	3,85	1,42	0,02037	2,409
Residues					
Waste for recovery	[kg]	9,322	3,449	0,0121	132,8
Tailings	[kg]	3,686	3,61	0,072	0,003159
Overburden	[kg]	526,6	416	3,541	107


The following table shows the contributions to the Depletion of Abiotic Resources, Global Warming Potential, Ozone Depletion Potential, Acidification Potential, Eutrophication Potential and Photochemical Ozone Creation Potential impact categories.

Impact assessment

Table 8: Results of the impact assessment for the life cycle of the declared aluminium product

GV01-6.09					
Impact categories	Unit per product	Total Life Cycle	Production	Use	End of Life
Depletion of Abiotic Resources (ADP)	[kg Sb eqv.]	2,571	1,577	0,04348	0,9503
Global Warming Potential (GWP)	[kg CO2 eqv.]	481,5	272,5	36,28	172,7
Ozone Depletion Potential (ODP)	[kg R11 eqv.]	9,289E-005	1,84E-005	5,522E-006	6,897E-005
Acidification Potential (AP)	[kg SO2 eqv.]	2,255	1,578	0,0129	0,664
Eutrophication Potential (EP)	[kg PO4 eqv.]	0,1991	0,1405	0,0009332	0,05765
Photochemical Ozone Creation Potential (POCP)	[kg ethene eqv.]	0,2485	0,1341	0,005687	0,1087

The table below describes the considered impact categories considered.



Producer: Sapa Building Systems Växjö AB
 Declaration number: EAA-K/20252-EN
 Date of issue: 16.06.2017

Table 9: Description of the impact categories

Description of Impact Categories	
Impact categories	Description
Primary energy, non-renewable	Primary energy is a measure for the consumption of non renewable (fossil and nuclear) energy resources. The availability of non renewable resources is limited.
Depletion of Abiotic Resources (ADP)	Reduction of non renewable resources, such as metal ores, minerals or energy resources.
Global Warming Potential (GWP)	Changes in the surface-air temperature, referred to as the global temperature, brought about by the greenhouse effect which is induced by emission of greenhouse gases into the air.
Ozone Depletion Potential (ODP)	The integrated change in total ozone per unit mass emission of a specific compound, relative to the integrated change in the total ozone per unit mass of CFC-11.
Acidification Potential (AP)	Acidification is caused by direct outlets of acids or by outlets of gases that forms acid in contact with rain and is deposited to soil and water. Three main pollutants exist: sulphur dioxide (SO ₂), nitrogen oxides (NO _x), and ammonia (NH ₃). Acid depositi
Eutrophication Potential (EP)	Index used to measure nutrient enrichment (eutrophication), which may result in algal blooms, caused by the release of sulphur, nitrogen, phosphorous and egradeable organic substances into the atmosphere and water courses.
Photochemical Ozone Creation Potential (POCP)	Chemical reactions brought about by the light energy of the sun. The reaction of nitrogen oxides with hydrocarbons in the presence of sunlight to form ozone is an example of a photochemical reaction

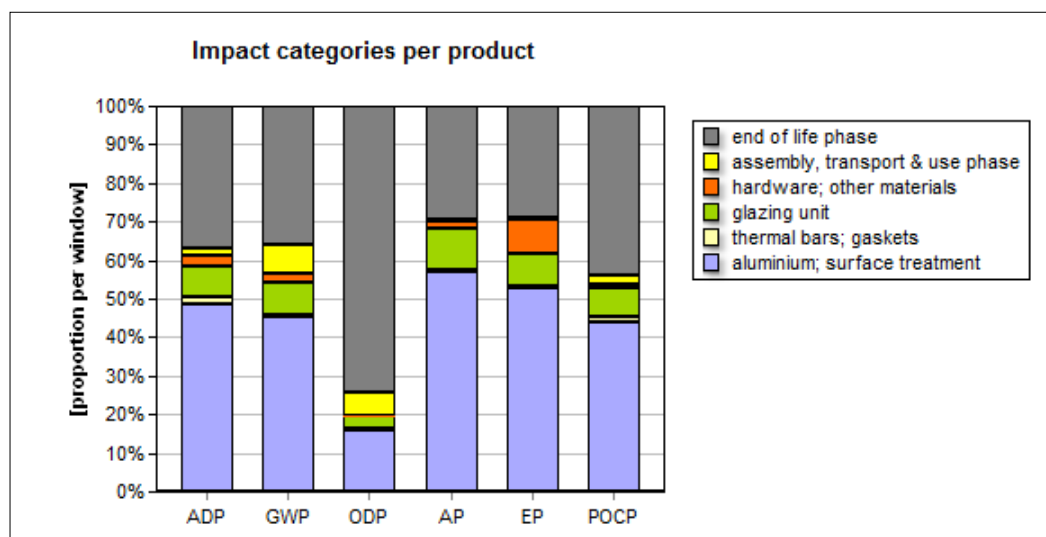


Figure 8: Breakdown of the impact categories by components for the production, use and end of life of the declared aluminium building product



Producer:	Sapa Building Systems Växjö AB	Date of issue
Declaration number:	EAA-K/20252-EN	16.06.2017

8 Product Category Rules (PCR) and verification

This EPD is based on the PCR document Aluminium Building Products of the EAA Environmental Product Declaration Program. The PCR document is available from the EAA webpage.

PCR


Review of the PCR document by the independent Advisory Board.

PCR Review

Independent verification of the calculation system and the data the declaration is based on according to ISO 14025: External Verification

EPD verification

Verifier of the declaration: Dr. Eva Schmincke



Producer:	Sapa Building Systems Växjö AB	Date of issue
Declaration number:	EAA-K/20252-EN	16.06.2017

9 References

- /Buxmann 2001/ Buxmann, Kurt; EAA, 2001; Ökobilanz einer ALUCOBOND-Fassade im Vergleich zu Vollaluminium und Faserzement.
- /EAA 2000/ EAA: Environmental profile report for the European Aluminium industry, April 2000
- /EAA 2005/ Aluminium Recycling in LCA, EAA 2005
- /GaBi 4/ GaBi 4: Software and database for life cycle assessment. IKP, University Stuttgart and PE Europe GmbH, 2001-2005.
- /ISO 14025/ ISO 14025: Environmental labels and declarations - Type III environmental declarations - Principles and procedures, 2006
- /ISO 14040/ ISO 14040: Environmental management - Life cycle assessment - Principles and framework, 2006
- /ISO 14044/ ISO 14044: Environmental management - Life cycle assessment - Principles and framework, 2006
- /CML 2002/ Guinée, J. B. (Hrsg.) Handbook on Life Cycle Assessment - Operational Guide to the ISO Standards. Boston Kluwer Academic Publishers, 2002.
- /saint-gobain-vitrage/ <http://www.saint-gobain-vitrage.com/us/fabrication.html> (last access, Feb. 2006)
- /Werner 2000 I/ Werner, Frank: Interdependencies between LC-modelling and the use of LCA in product design-related decision situations: with special emphasis on the influence of cognitive models and values on the modelling of reuse and recycling & other end-of-life optio
- /Werner 2000 II/ Werner, Frank; EMPA Dübendorf, 2000, CH; Treatment of recycling of aluminium in LCA.