



Forest TMfx

Wood effect sheet vinyl flooring



Forest fx™

3330 Rustic Oak

Forest fx™

The Forest fx collection of heterogeneous wood effect vinyl sheet floorcoverings is specifically designed to meet the demands of commercial interiors, leading with the key advantages of aesthetics and performance. The contemporary and creative timber designs create a varied and authentic wood palette, demonstrated by the intricate grains and natural colour ways.

The practical, resilient and hygienic product construction of Forest fx makes it ideal for healthcare, education, retail, office and leisure sectors. Combined with high performance product features, the collection is both environmentally preferable and meets decorative, budgetary and maintenance objectives.

For more details on these or any other Polyflor products including our Acoustix Forest fx collection visit www.polyflor.com.



To further enhance the floorcovering, Forest fx features a high quality, cross-linked polyurethane reinforcement (PUR) providing a low cost, polish-free maintenance regime for the lifetime of the product.



**100%
RECYCLABLE**

The Forest fx collection of vinyl floorcoverings is 100% recyclable and can be recycled many times over without losing any of its original performance properties.



Forest fx achieves BRE A+ certification for major use areas based on a life cycle analysis approach over a building life of 60 years. This ensures that the product meets performance standards appropriate for their intended use.



3090 Vermont Maple
plank w/l 100x500mm
w/r 3290




3290 Warm Beech
plank w/l 100x500mm
w/r 3290






2990 Oiled Oak
plank w/l 167x1500mm
w/r 2990

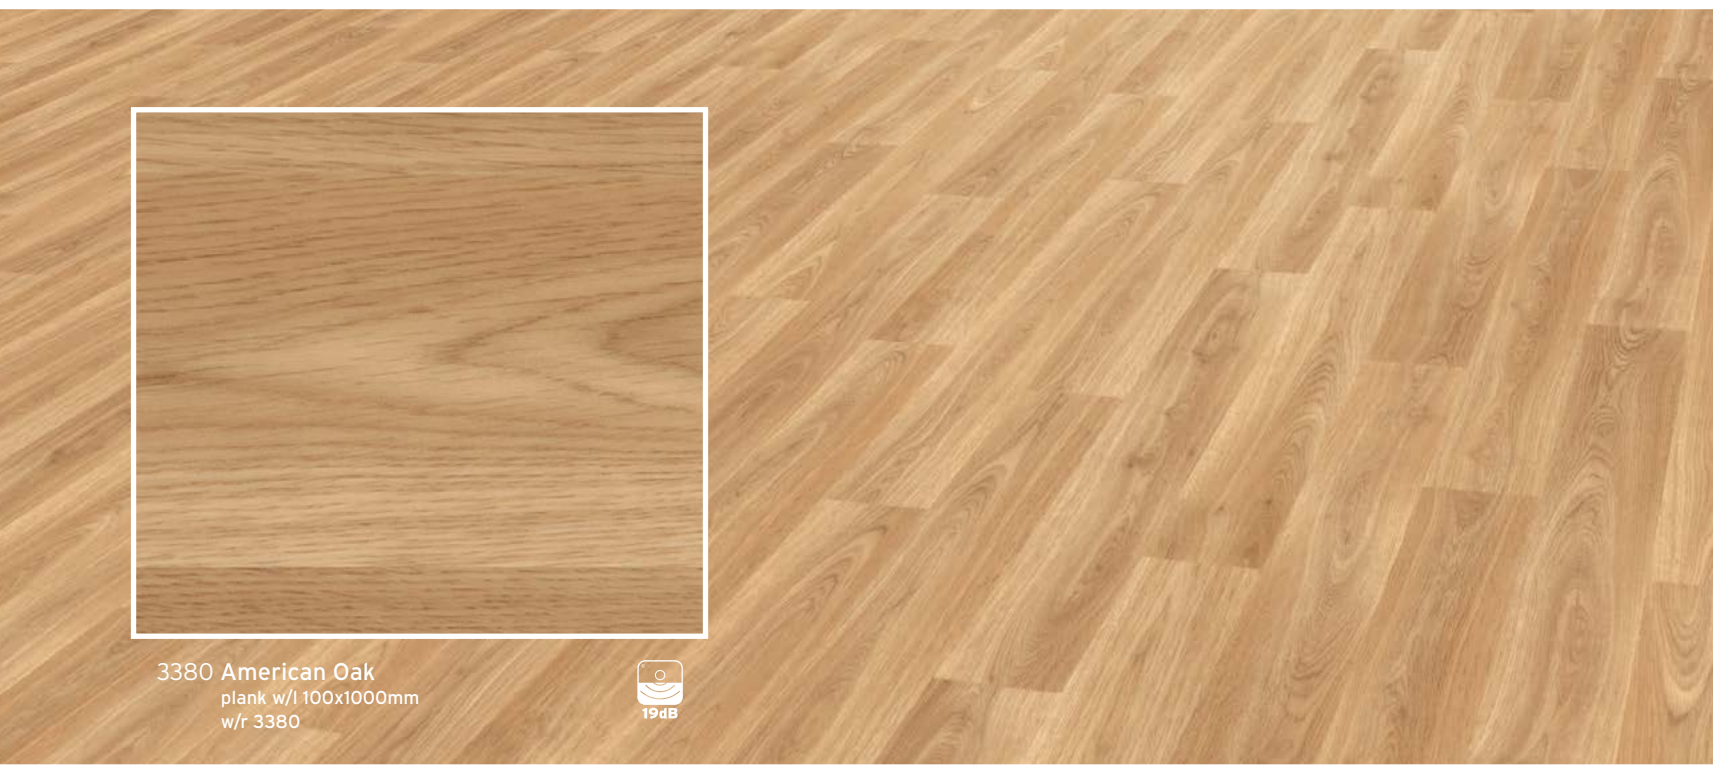

3380 American Oak
plank w/l 100x1000mm
w/r 3380

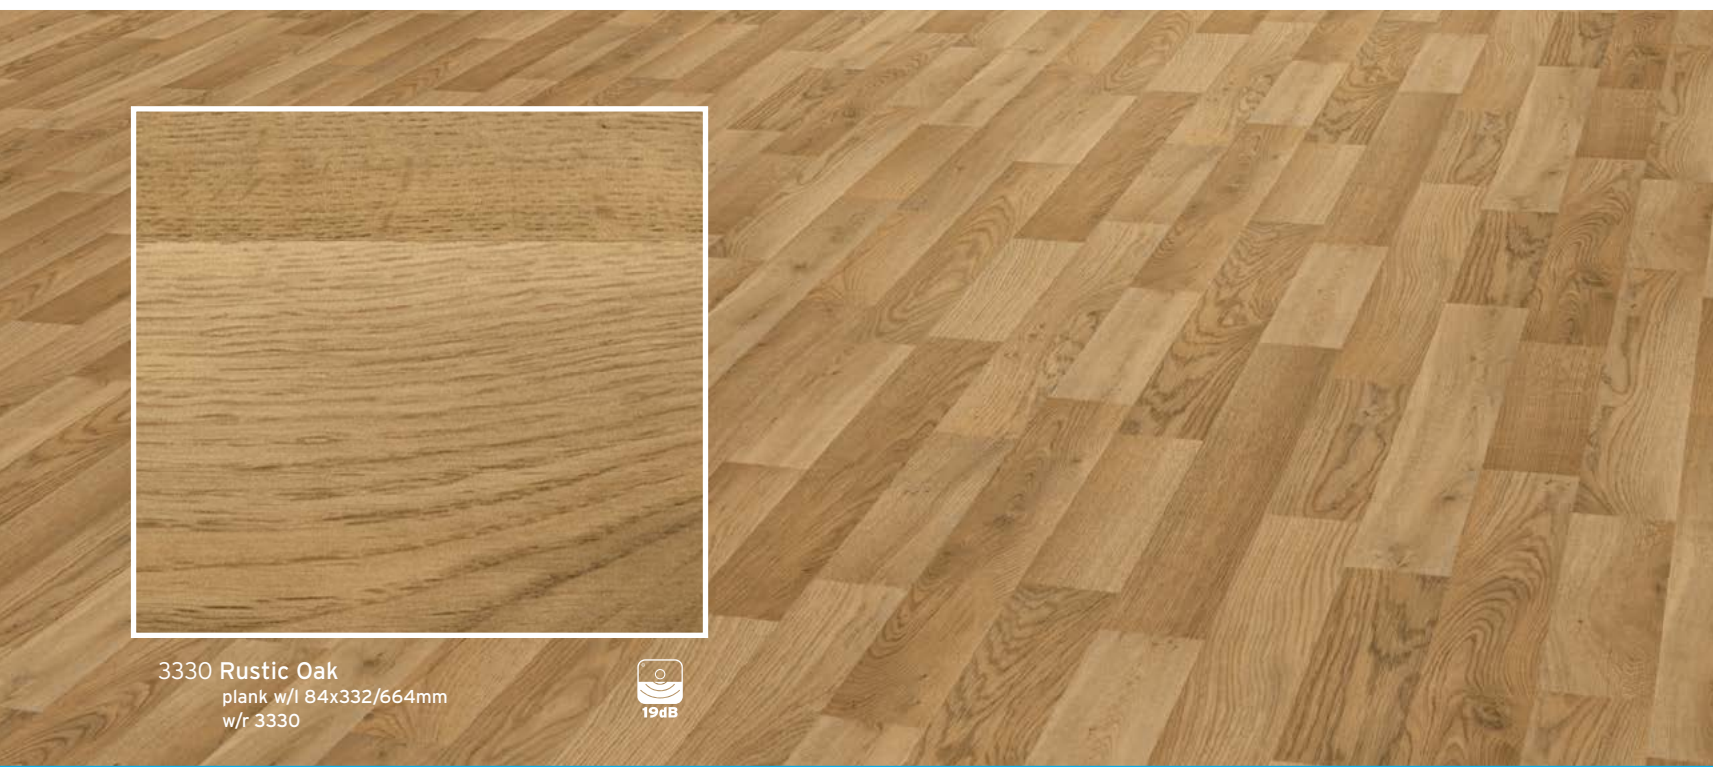

3330 Rustic Oak
plank w/l 84x332/664mm
w/r 3330





3100 Classic Oak
plank w/l 167x1500mm
w/r 3330



3340 European Oak
plank w/l 100x1000mm
w/r 3340



3310 Rich Cherry
plank w/l 100x500mm
w/r 3310





3120 French Walnut
plank w/l 167x1000mm
w/r 3120



3110 Stained Maple
plank w/l 100x500mm
w/r 3110



3150 Smoked Oak
plank w/l 167x1500mm
w/r 3150






3230 Classic Walnut
plank w/l 167x1000mm
w/r 3230



3360 Mahogany
plank w/l 84x332/664mm
w/r 3360

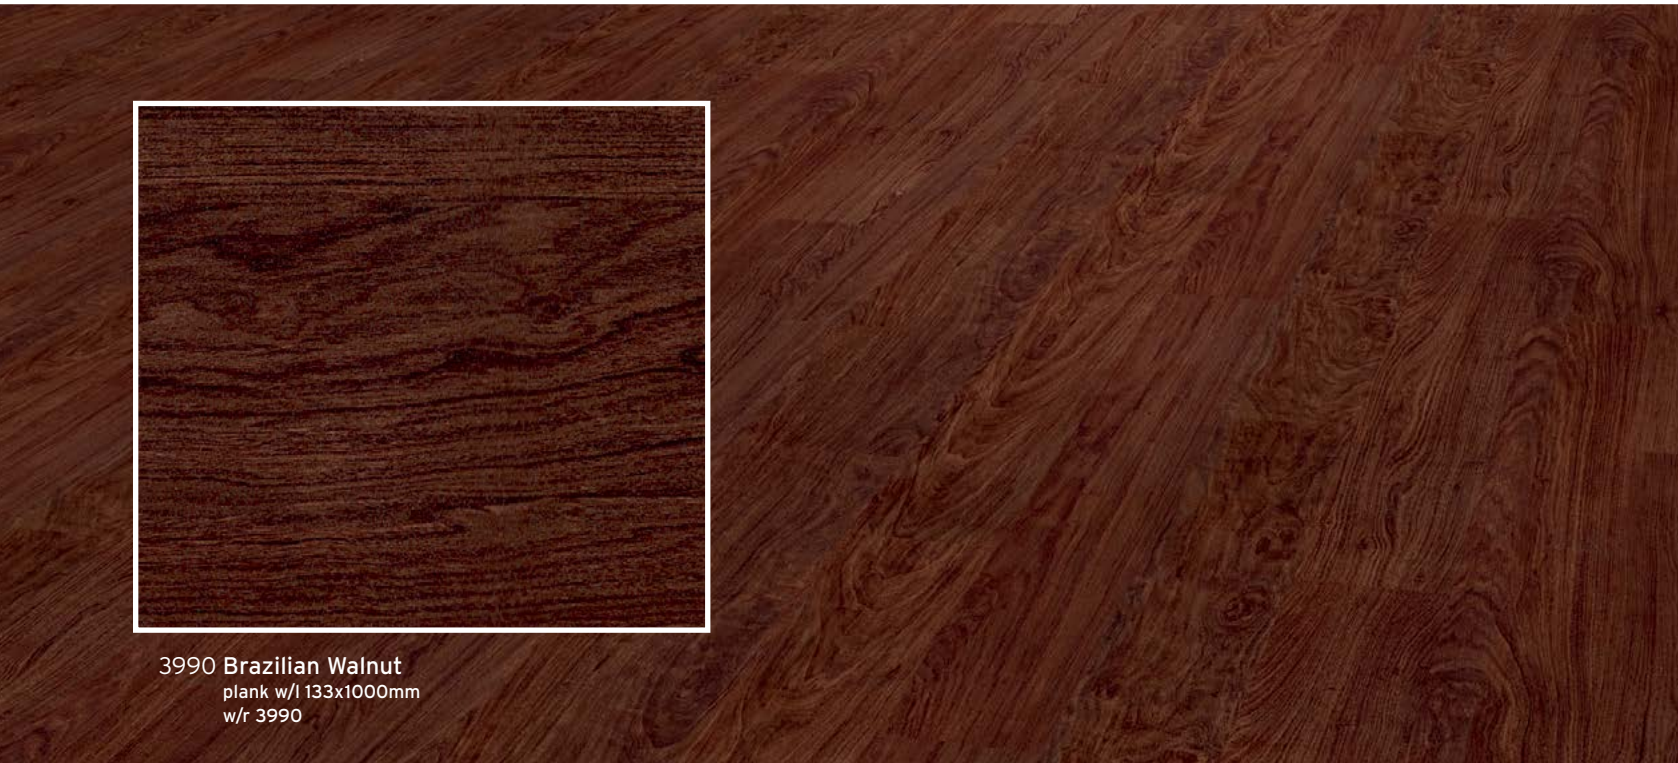

3990 Brazilian Walnut
plank w/l 133x1000mm
w/r 3990

| Specifications | Standards | Forest fx |
|-------------------------------------|--|--|
| Type of Floorcovering | EN 649 EN ISO 10582 | Heterogeneous Heterogeneous |
| Product Enhancement | | PUR |
| Gauge | EN 428 EN ISO 24346 | 2.0mm |
| Wear Layer | EN 429 EN ISO 24340 | 0.7mm |
| Performance Classification | EN 685 EN ISO 10874 | 23, 34, 43 |
| Roll Size | EN 427 EN ISO 24341 | 2m x 20m = 40m ² |
| Total Weight | EN 430 EN ISO 23997 | 2,700g/m ² |
| Residual Indentation | EN 433 EN ISO 24343-1 | ≤ 0.1mm |
| Abrasion Resistance | EN 649 EN ISO 10582 | Group T Type 1 |
| Dimensional Stability | EN 434 EN ISO 23999 | ≤ 0.40% |
| Behaviour to Fire | EN 13501-1 | Bfl-S1 |
| Slip Resistance | DIN 51130 EN 13893 | R10 For safety flooring with sustainable wet slip resistance, refer to the Polysafe ranges. DS (Dry Slip) |
| Light Fastness | ISO 105-B02(Method3) | ≥ 6 |
| Resistance to Chemicals | EN 423 (ASTM F 1303-99) | Excellent |
| Underfloor Heating Suitability | | Suitable, Max 27°C |
| Castor Chair Suitability | EN 425 ISO 4918 | Yes, type W, EN 12 529 |
| VOC Test | Indoor Air Comfort Gold AgBB FloorScore Swedish B.P.D. (FLEC test) GBCA/NZGBC Green Star IEQ-VOC | Eurofins certified product Very low emissions Certified product Best class Compliant |
| Electrical Behaviour (body voltage) | EN1815 | This product does not accumulate static charges above 2kV and is classified as 'antistatic'. For specialist applications where there is requirement to dissipate the electrostatic charge, see the Polyflor ESD product range. |
| Hygiene | This product has been independently tested and results demonstrate that it inhibits the growth of MRSA. An effective cleaning regime is however, the most important defence against infection. | |
| Environmentally Preferable Flooring | Polyflor Forest fx PUR achieves a BRE Global Environmental A+ Rating (Certificate No: ENP 415) in major use areas such as education and healthcare. Polyflor Forest fx PUR is 100% recyclable. A full Environmental Report detailing Polyflor's achievements in areas such as recycling, energy reduction and waste avoidance can be found at www.polyflor.com/environment . | |



Sweden

FalckDesign AB
Energigatan 9, SE-434 23 Kungsbacka,
Sweden
Tel: +46 (0) 300 15820
E-mail: info@falckdesign.com

Germany

objectflor Art und Design Belags GmbH
Wankelstraße 50, 50996 Köln, Germany
Tel: +49 (0) 2236 966 330
E-mail: info@objectflor.de

Australia

Polyflor Australia
59-65 Wedgewood Road, Hallam,
Vic 3803, Australia
Tel: 1800 777 425
E-mail: sales@polyflor.com.au

New Zealand

Polyflor New Zealand
100 Plunket Ave, Manukau 2104
New Zealand
PH: 0800 765 935
E-mail: sales@polyflor.co.nz

Canada

Polyflor Canada Inc.
14-30 Eglinton Avenue West,
Suite 114 Mississauga, Ontario L5R 0C1
Canada
Tel: +1 647 988 POLY (7659)
E-mail: nickdron@polyflor.ca

Russia

Polyflor Contract Ltd
Office 12, Business centre "Strela",
d. 113, liter B, Ligovsky pr.,
St. Petersburg, Russia.
Tel: +7 812 332 42 02
E-mail: info@polyflor.ru

Hong Kong

Polyflor Hong Kong
Room 2409, 24th Floor,
New York Life Tower, Windsor House,
311 Gloucester Road,
Causeway Bay, Hong Kong
Tel: +852 2865 0101
E-mail: anthonylam@polyflor.com.hk

Ireland

Polyflor Ireland
Unit 106, Millennium Trade Park,
Ballycoolin, Blanchardstown, Dublin 11
Tel: +353 (1) 864 9304
E-mail: tmockler@polyflor.com

UAE

Polyflor Middle East
PO Box 71862, Dubai, UAE
Tel: +971 4 349 1078
E-mail: espm@eim.ae

Norway

Polyflor Nordic
Kjelsåsveien 168 B, N-0884 Oslo, Norway
Tel: +47 23 00 84 00
E-mail: firmapost@polyflor.no

Polska

Polyflor SP. Z O.O.
ul. Smolna 13 A / U3, 61-008 Poznań,
Poland
Tel: +48 61 820 3155
E-mail: polyflor@polflor.com.pl

South Africa

Poly Sales Africa (Pty.) Ltd
PO Box 3967, Edenvale 1610,
South Africa
Tel: (27) 11 609 3500
E-mail: info@polyflor.co.za

Forest *fx*TM

Wood effect sheet vinyl flooring

 **POLYFLOR**TM
COVERING THE WORLD

POLYFLOR LTD. PO BOX 3 RADCLIFFE NEW ROAD WHITEFIELD MANCHESTER M45 7NR UK
TEL: +44 (0)161 767 1111 UK SALES DIRECT: +44 (0)161 767 1122 UK SAMPLE REQUESTS: +44 (0)161 767 2551
EXPORT SALES DIRECT: +44 (0)161 767 1913 TECHNICAL SUPPORT: +44 (0)161 767 1912 UK FAX: +44 (0)161 767 1128
EXPORT FAX: +44 (0)161 767 1166
E-MAIL: INFO@POLYFLOR.COM WEBSITE: WWW.POLYFLOR.COM

*James Halstead*TM
FLOORING

