




POLYFLOR™
COVERING THE WORLD

Flooring Collection


Commercial and Residential Flooring

Pearlazzo PUR


HARDWEARING, NON-DIRECTIONAL VINYL FLOORING FEATURING A POLYURETHANE REINFORCEMENT

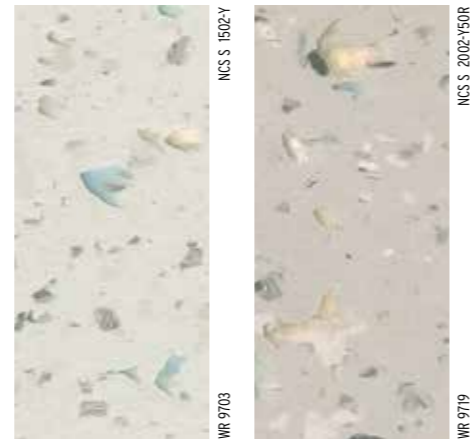


Chalk Burst 9703 Sailcloth 9719

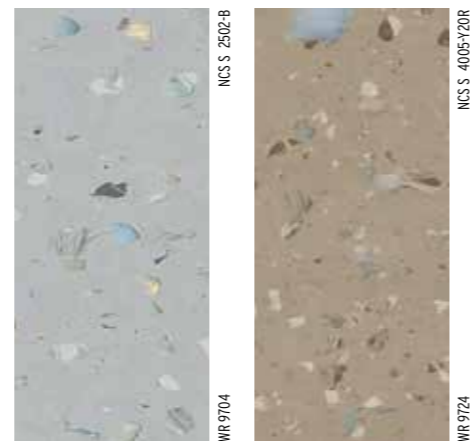


Mineral 9704 Wholemeal 9724

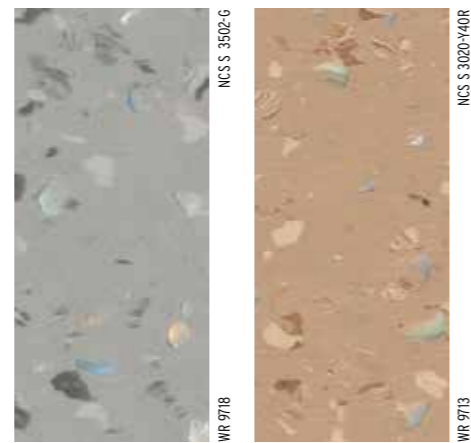


Rain Cloud 9718 Truffle 9713

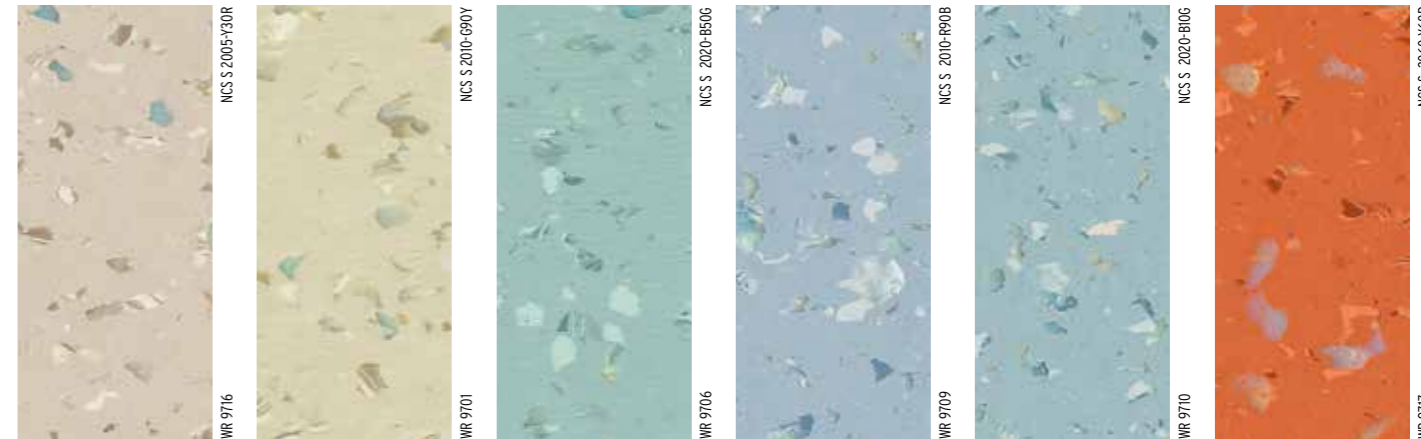

Toasted Almond 9716 Wild Flax 9701 Mint Crisp 9706 Skylight 9709 Seafoam 9710 Autumn Fire 9717

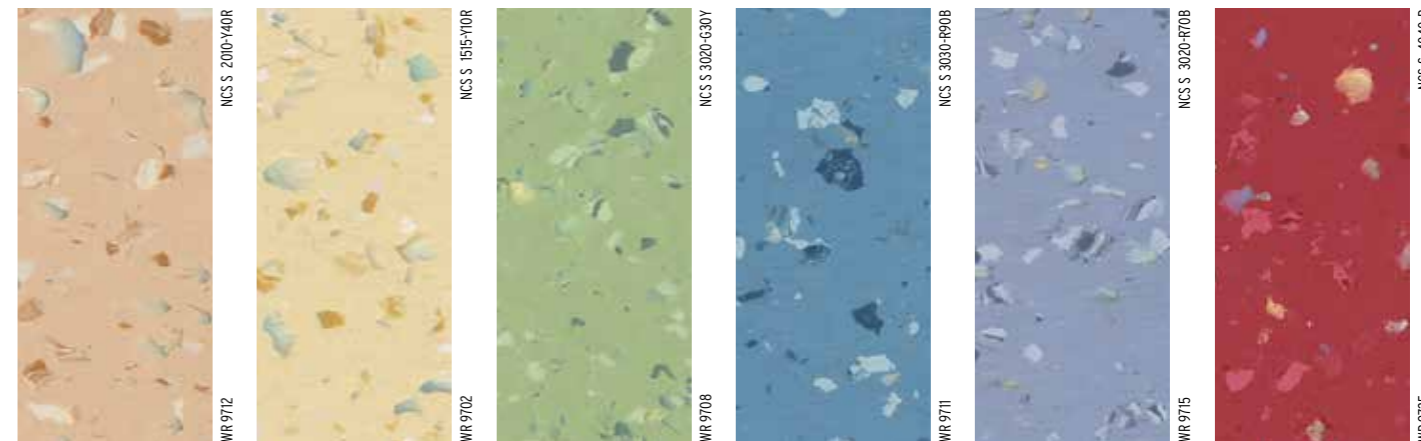


Sandcastle 9712 Lemon Ice 9702 Alpine Meadow 9708 Atlantic Mist 9711 Lilac Bloom 9715 Dark Berry 9725

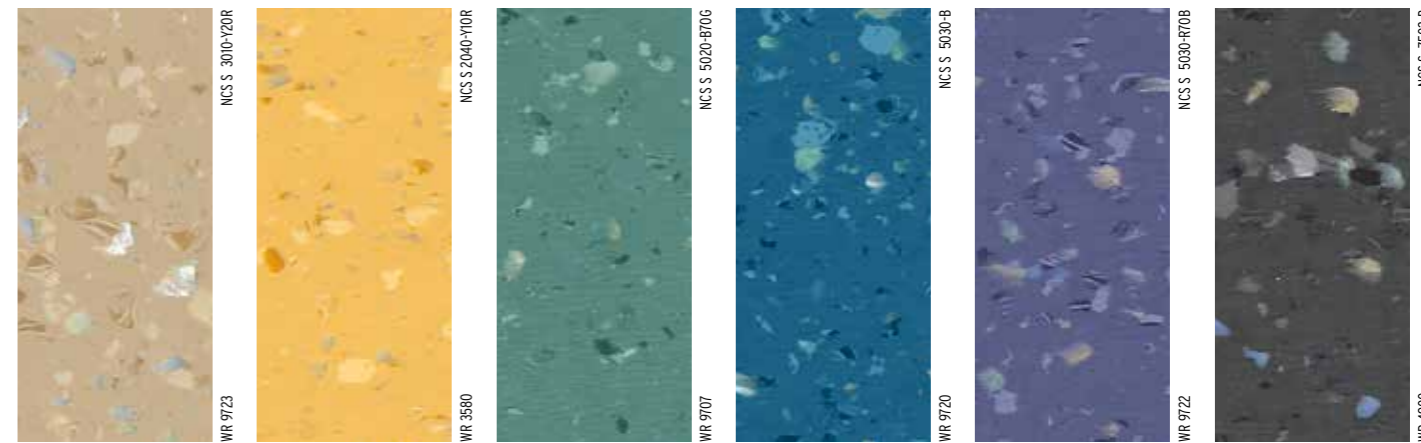

Caramel 9723 Sunrise 9721 Satin Jade 9707 Ocean Ripple 9720 Purple Crush 9722 Charcoal 9705

KEY FEATURES

- Attractive, high performance, homogeneous floorcovering.
- High quality, cross-linked polyurethane reinforcement, UV cured to provide a low cost, polish-free maintenance regime for the lifetime of the flooring.
- Unique multi-flake decoration.
- Conforms to EN649 / EN ISO 10581.



* Refer to BRE Global ratings on www.greenbooklive.com

SPECIFICATIONS

WR = weld rod




GAUGE: 2.0mm
AVAILABILITY: Sheet: 2m x 20m



Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.

Prestige PUR

HARDWEARING, NON-DIRECTIONAL VINYL FLOORING FEATURING A POLYURETHANE REINFORCEMENT

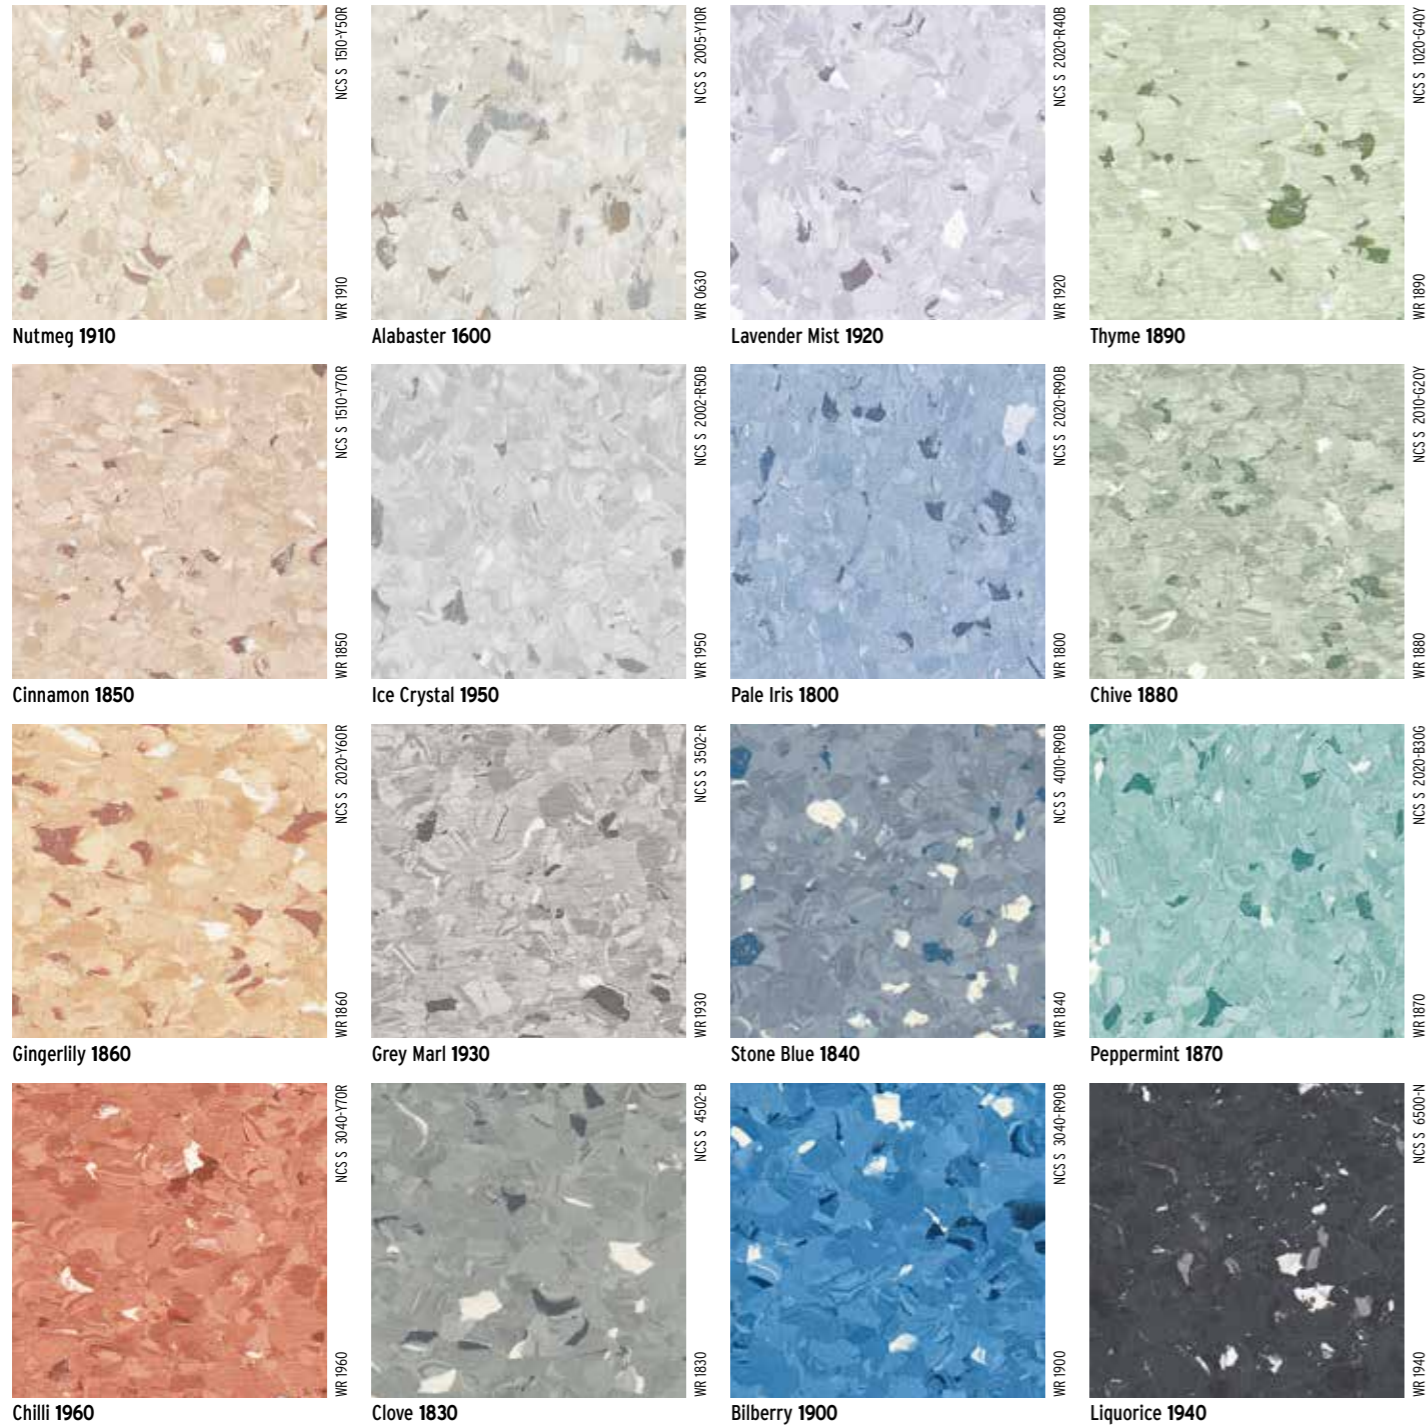


KEY FEATURES

- Attractive, high-performance, homogeneous floorcovering.
- High quality, cross-linked polyurethane reinforcement, UV cured to provide low cost, polish-free maintenance regime for the lifetime of the flooring.
- Non-directional duotone chip decoration with tonal highlight chips.
- Conforms to EN 649 / EN ISO 10581.

SPECIFICATIONS




GAUGE: 2.0mm
AVAILABILITY: Sheet: 2m x 20m
Tile: 300 x 300mm, 608 x 608mm



* Refer to BRE Global ratings on www.greenbooklive.com

Mystique PUR

HARDWEARING, NON-DIRECTIONAL VINYL FLOORING FEATURING A POLYURETHANE REINFORCEMENT

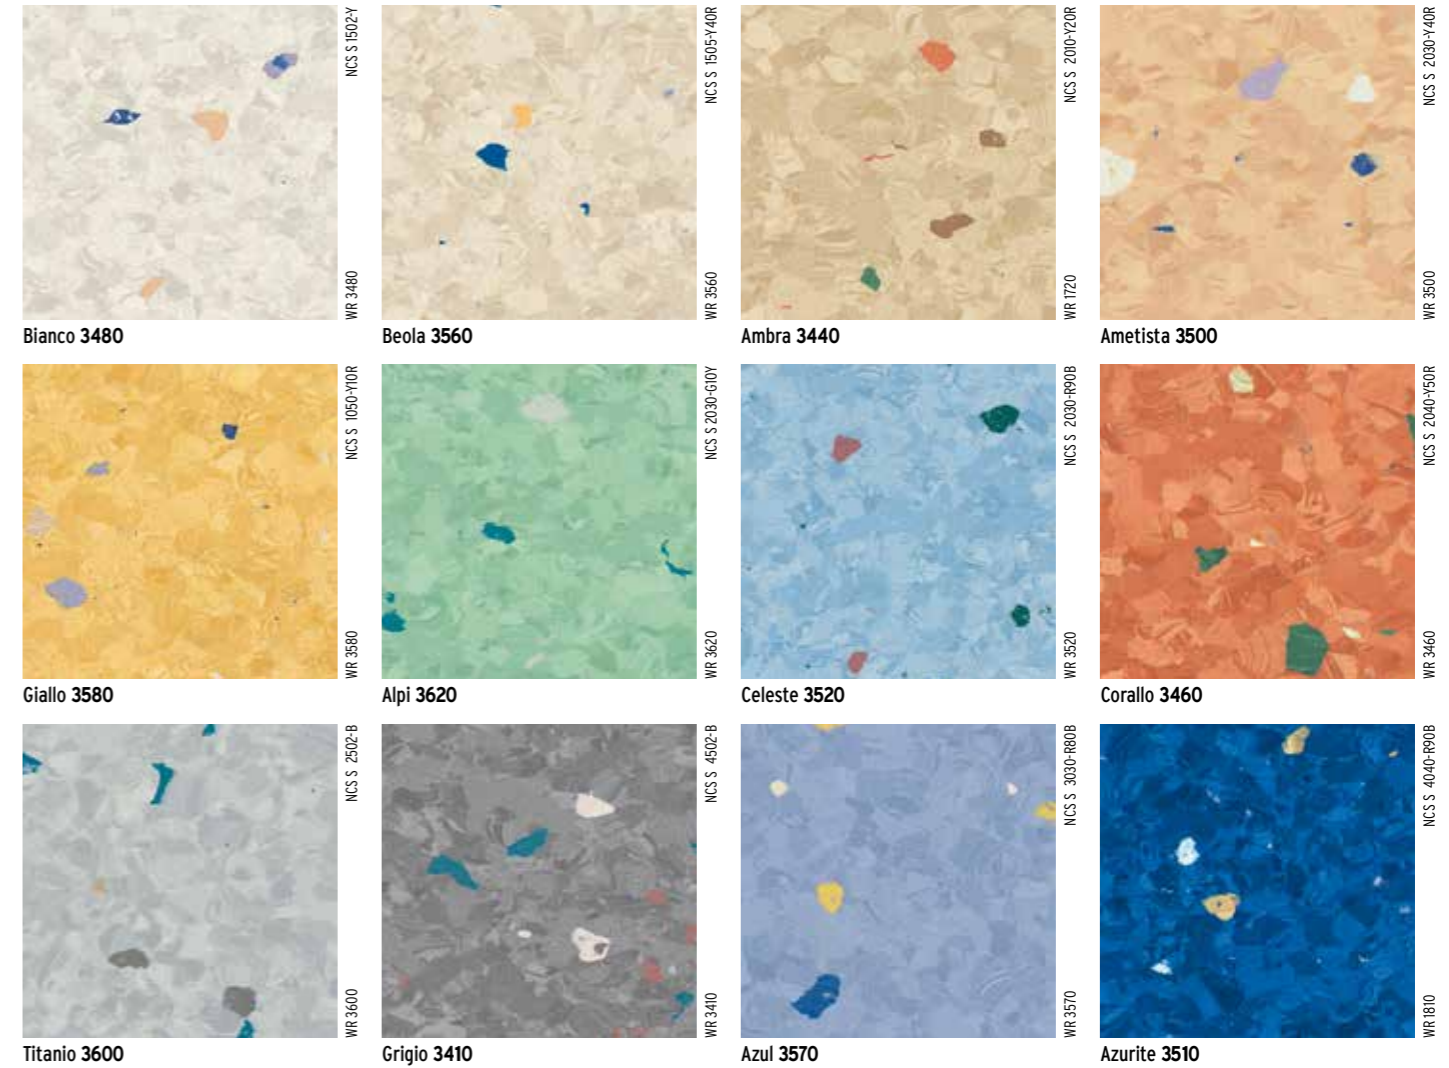


KEY FEATURES

- Attractive, high-performance, homogeneous floorcovering.
- High quality, cross-linked polyurethane reinforcement, UV cured to provide low cost, polish-free maintenance regime for the lifetime of the flooring.
- Non-directional duotone chip decoration with three non-tonal highlight chips.
- Conforms to EN 649 / EN ISO 10581.

SPECIFICATIONS



GAUGE: 2.0mm
AVAILABILITY: Sheet: 2m x 20m
Tile: 300 x 300mm, 608 x 608mm




Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.

It is recommended that a larger sample piece is viewed to appreciate the decoration.


Classic Mystique PUR

HARDWEARING, NON-DIRECTIONAL VINYL FLOORING FEATURING A POLYURETHANE REINFORCEMENT

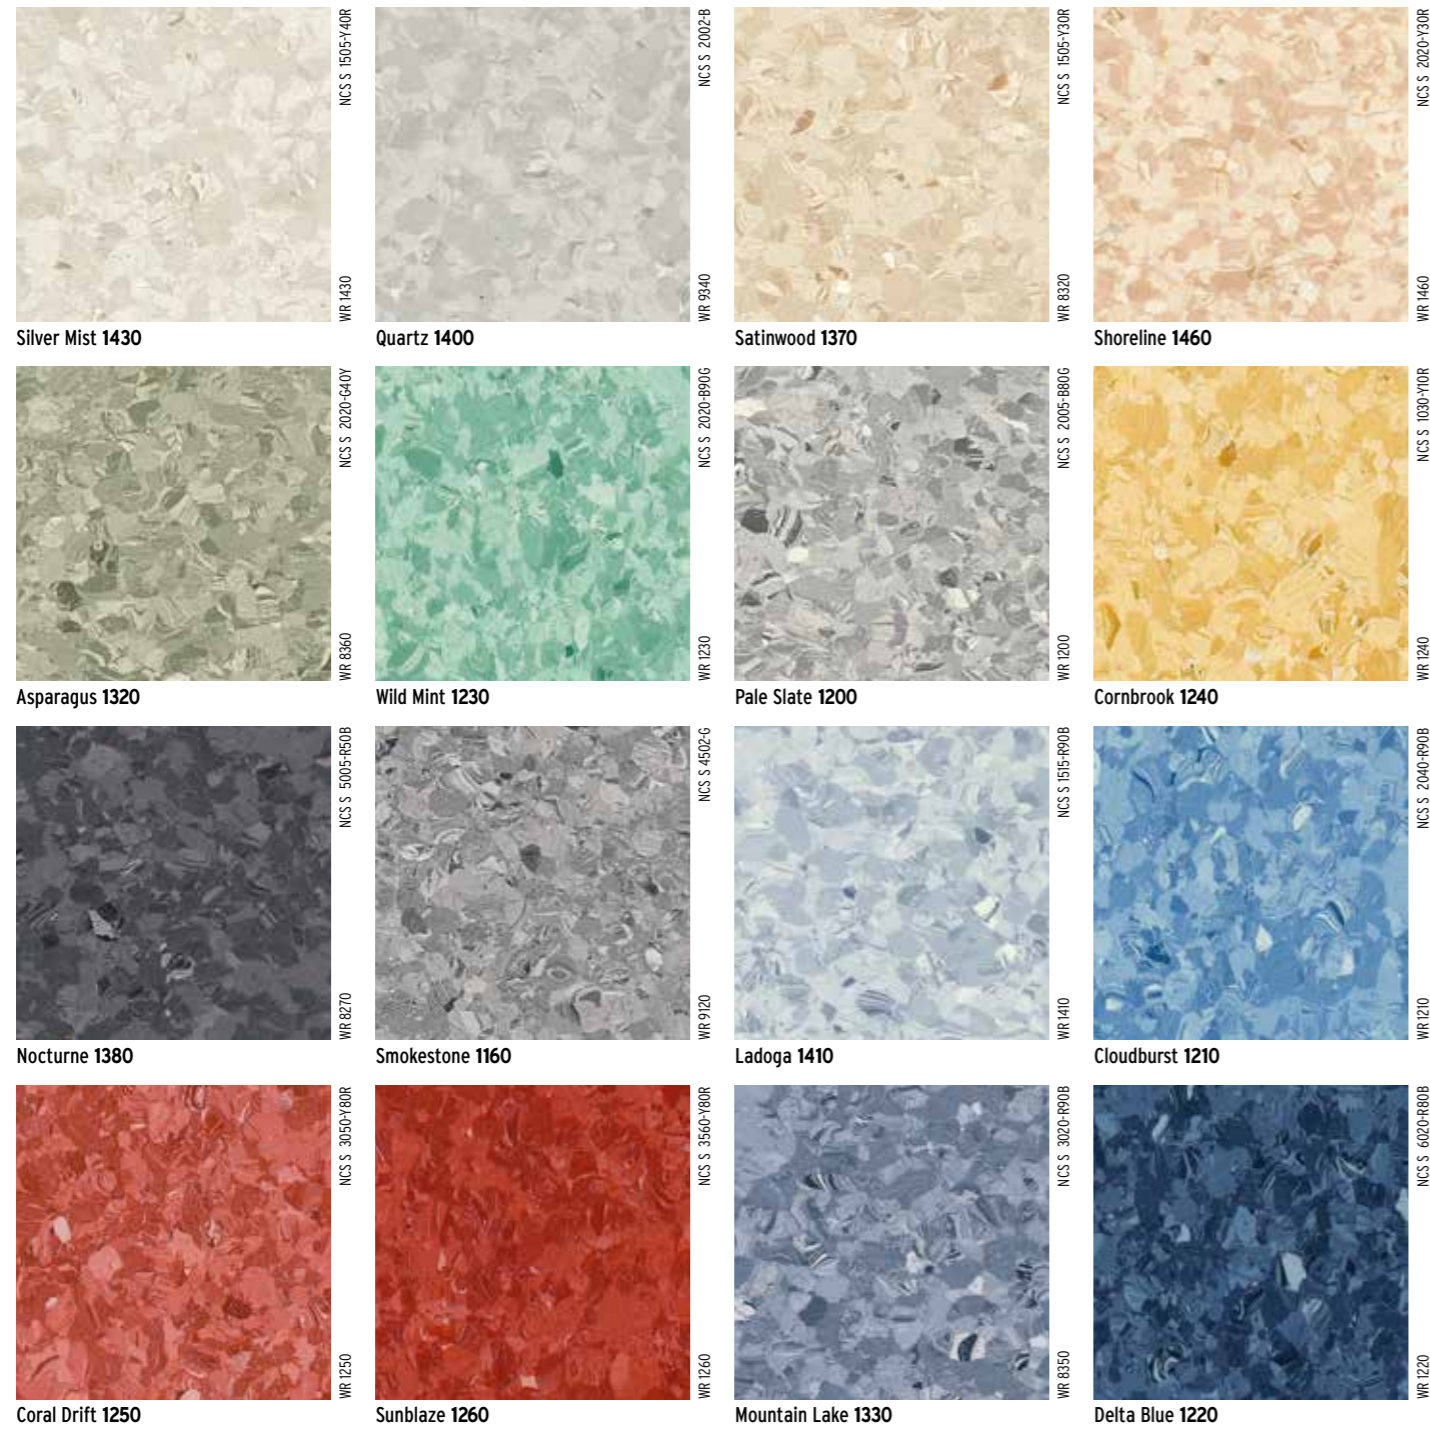

KEY FEATURES

- Attractive, high-performance, homogeneous floorcovering.
- High quality, cross-linked polyurethane reinforcement, UV cured to provide low cost, polish-free maintenance regime for the lifetime of the flooring.
- Non-directional duotone chip decoration with marbled tonal highlight chips.
- Conforms to EN 649 / EN ISO 10581.



* Refer to BRE Global ratings on www.greenbooklive.com


SPECIFICATIONS



GAUGE: 2.0mm
AVAILABILITY: Sheet: 2m x 20m
Tile: 300 x 300mm, 608 x 608mm


2000 PUR

HEAVY-DUTY VINYL FLOORING FEATURING A MARBLEISED DECORATION AND POLYURETHANE REINFORCEMENT

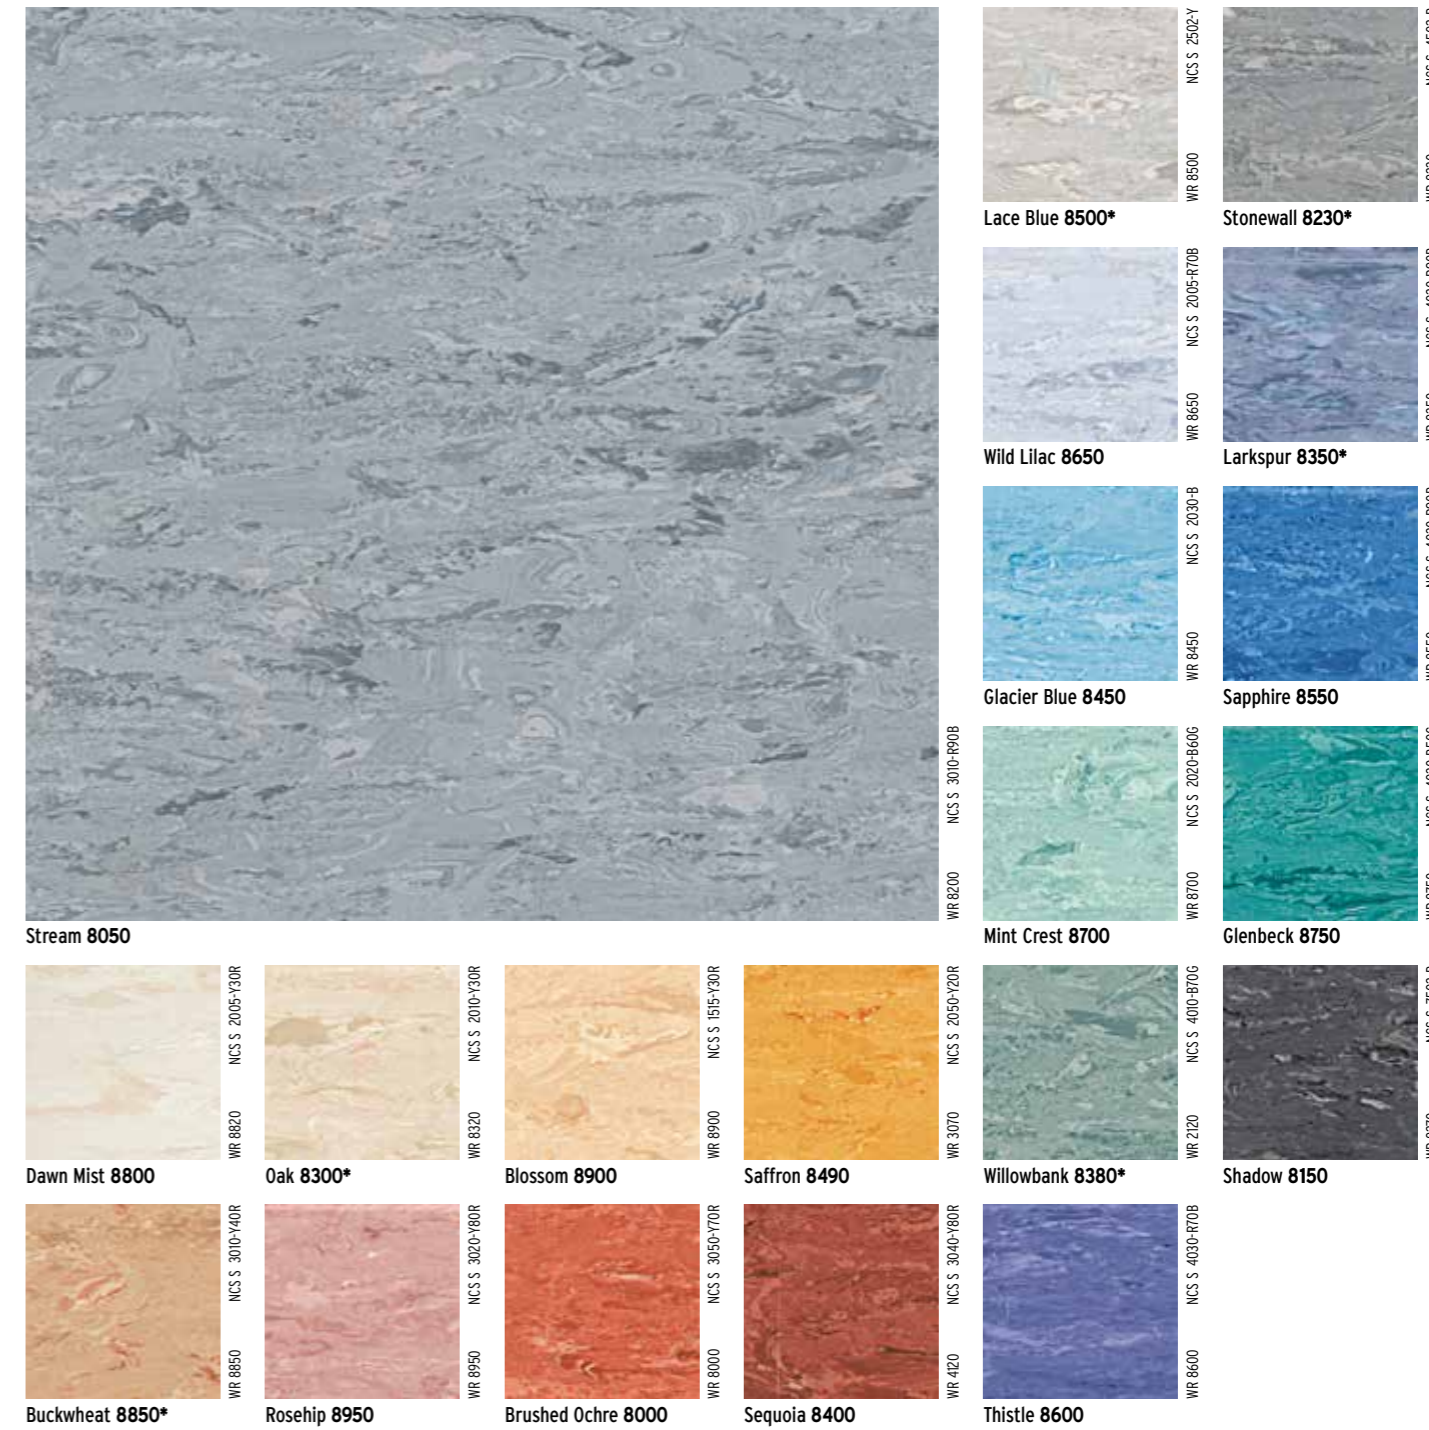

KEY FEATURES

- Hardwearing, homogeneous commercial floorcovering.
- High quality, cross-linked polyurethane reinforcement, UV cured to provide low cost, polish-free maintenance regime for the lifetime of the flooring.
- Directional duotone marbled decoration with marbled highlight tones.
- Conforms to EN 649 / EN ISO 10581.



Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.

SPECIFICATIONS




GAUGE: 2.0mm, 2.5mm
AVAILABILITY: Sheet: 2m x 20m (2.0mm)
 2m x 15m (2.5mm)
Tile: 300 x 300mm (2.0mm, 2.5mm)
 608 x 608mm (2.0mm)

All colours are available ex-stock in 2.0mm.
 * 6 colours are available ex-stock in 2.5mm.

HOMOGENEOUS FLOORING

XL PU


HEAVY-DUTY VINYL FLOORING FEATURING A MARBLEISED DECORATION AND POLYURETHANE SURFACE TREATMENT

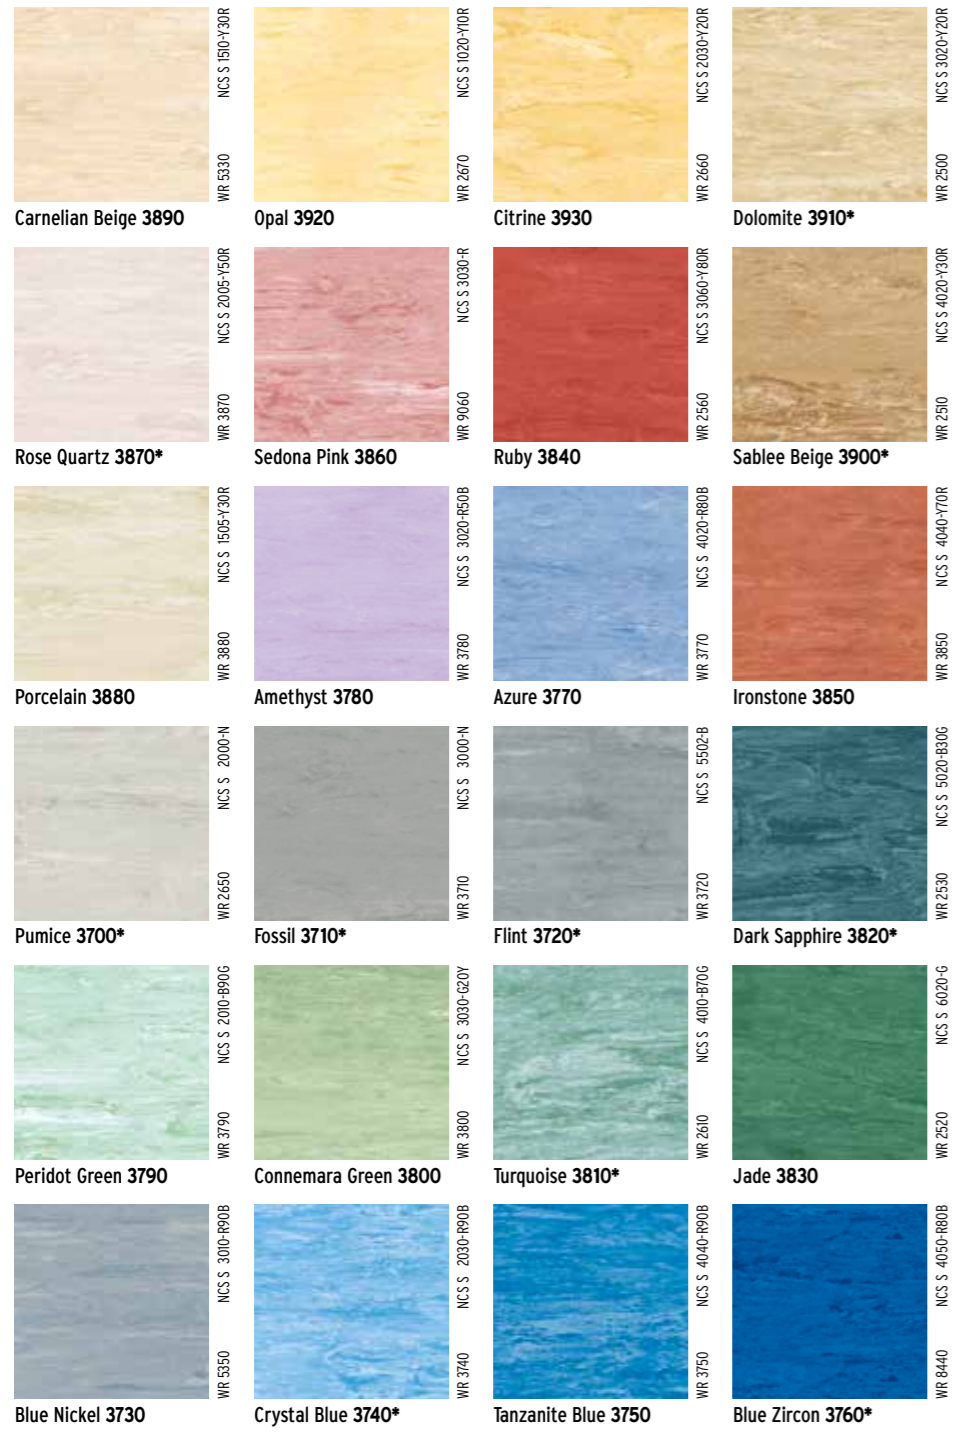

All colours are available ex-stock in 2.0mm.
* 10 colours are available ex-stock in 1.5mm.

KEY FEATURES


- Hardwearing, homogeneous commercial floorcovering.
- Polyurethane surface treatment provides an excellent foundation for an ongoing cleaning regime, leading to maintenance cost savings.
- Directional duotone marbled decoration.
- Conforms to EN 649 / EN ISO 10581.



* Refer to BRE Global ratings on www.greenbooklive.com



SPECIFICATIONS

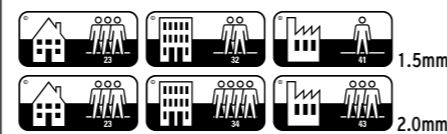


GAUGE: 1.5mm, 2.0mm
 AVAILABILITY: Sheet: 2m x 27.5m (1.5mm)
 2m x 20m (2.0mm)
 Tile: 300 x 300mm (2.0mm)
 608 x 608mm (2.0mm)

HOMOGENEOUS FLOORING

Standard XL


HEAVY-DUTY VINYL FLOORING WITH A MARBLEISED DECORATION

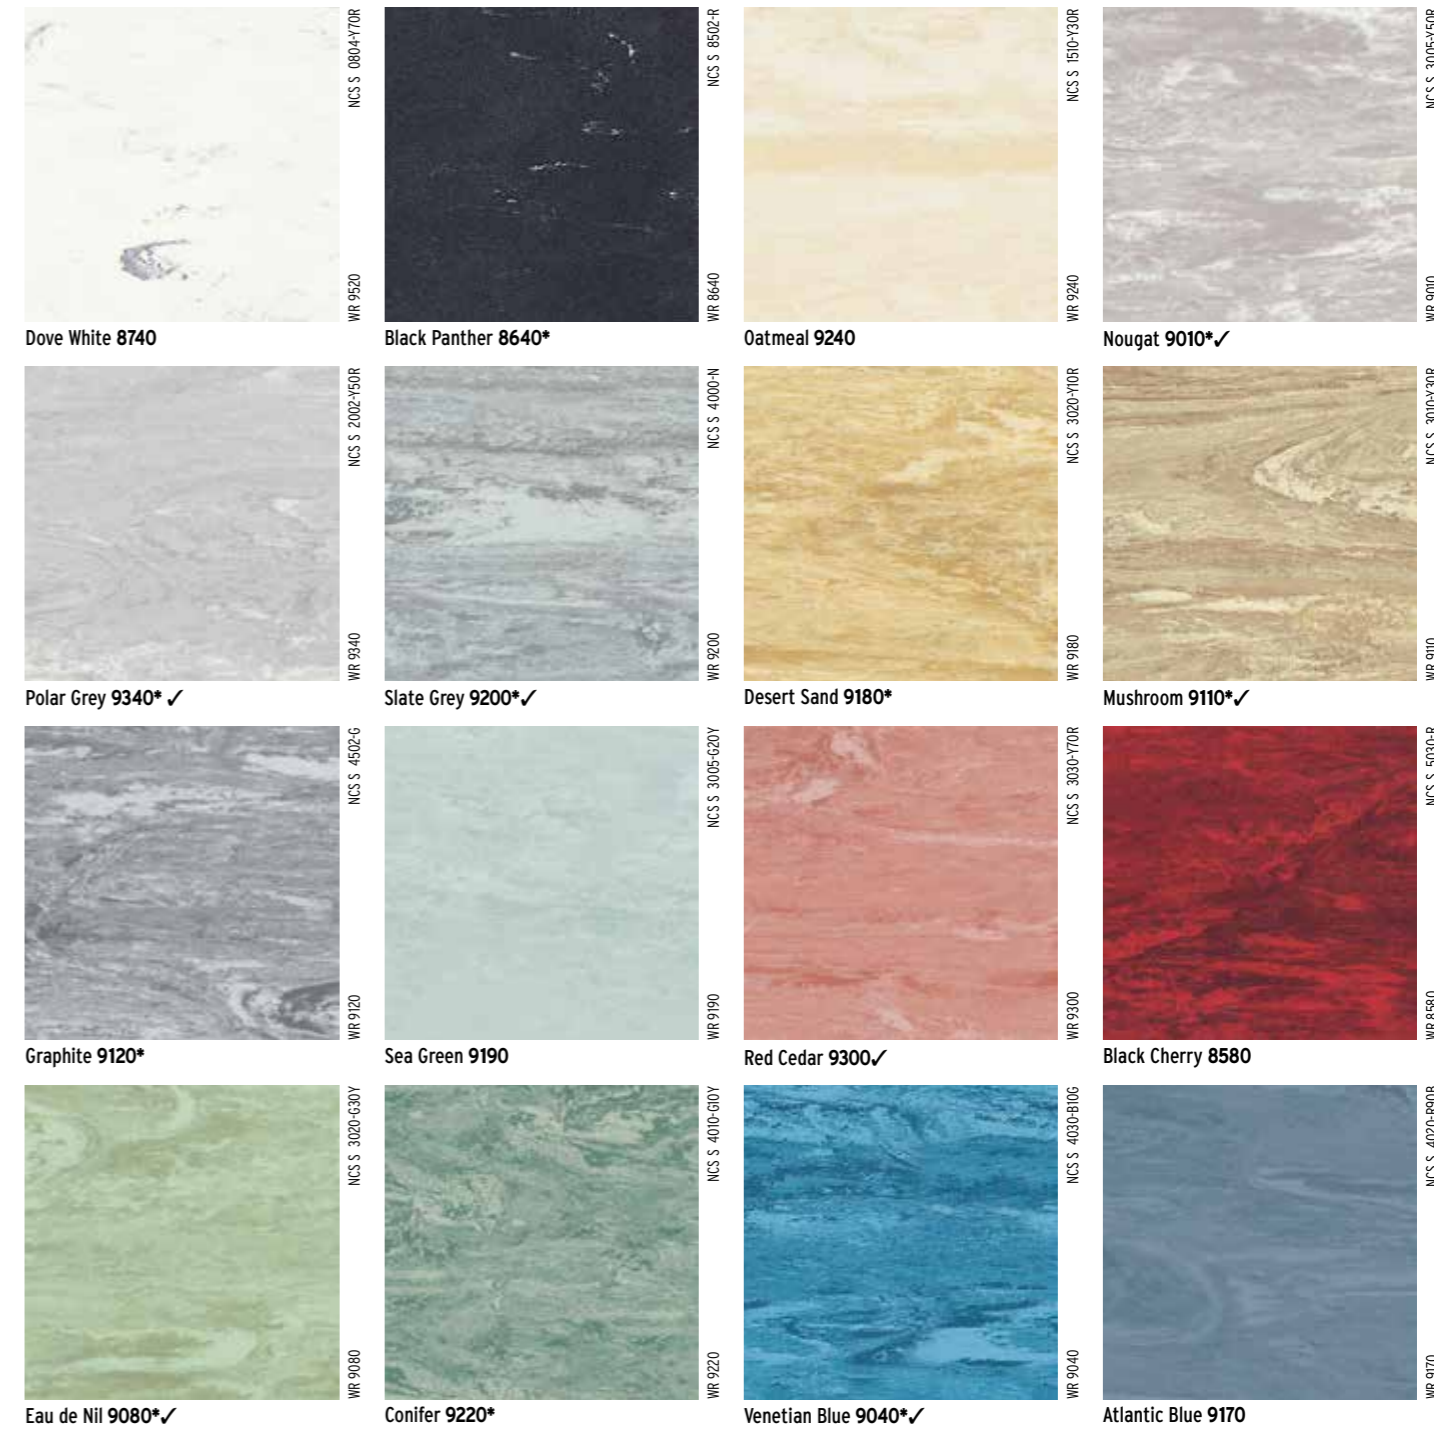

All colours are available ex-stock in 2.0mm. * 10 colours are available ex-stock in 1.5mm. ✓ 7 colours are available ex-stock in 2.5 and 3.0mm.

KEY FEATURES


- Hardwearing, homogeneous commercial floorcovering, in a choice of gauges.
- Directional duotone marbled decoration.
- Conforms to EN 649 / EN ISO 10581.



Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.



SPECIFICATIONS

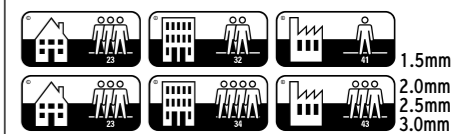

GAUGE: 1.5mm, 2.0mm, 2.5mm, 3.0mm
 AVAILABILITY: Sheet: 2m x 27.5m (1.5mm)
 2m x 20m (2.0mm), 2m x 15m (2.5mm), 2m x 13m (3.0mm)
 Tile: 300 x 300mm (2.0mm, 2.5mm 3.0mm)
 608 x 608mm (2.0mm)

Polyflex Plus PU

ECONOMICAL, GENERAL-PURPOSE VINYL TILE FEATURING A POLYURETHANE SURFACE TREATMENT



Duotone Marbling




Traditional Marbling



All colours are available ex-stock in 2.0mm.
 * 12 colours are available ex-stock in 1.5mm and 2.5mm.

KEY FEATURES


- General-purpose, homogeneous vinyl tile.
- Polyurethane surface treatment provides an excellent foundation for an ongoing cleaning regime, leading to maintenance cost savings.
- Conforms to EN 649 / EN ISO 10581.
- Available in traditional or duotone marbling.
- Traditional marbling colours include a secondary complementary colour.



† Refer to BRE Global ratings on www.thegreenguide.org.uk




SPECIFICATIONS

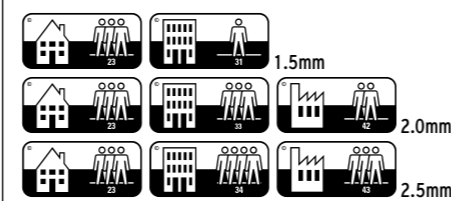

GAUGE: 1.5mm, 2.0mm, 2.5mm
 AVAILABILITY: Tile: 300 x 300mm

Polysafe Corona PUR

HEAVY-DUTY SAFETY FLOORING WITH A MULTI-CHIP DECORATION

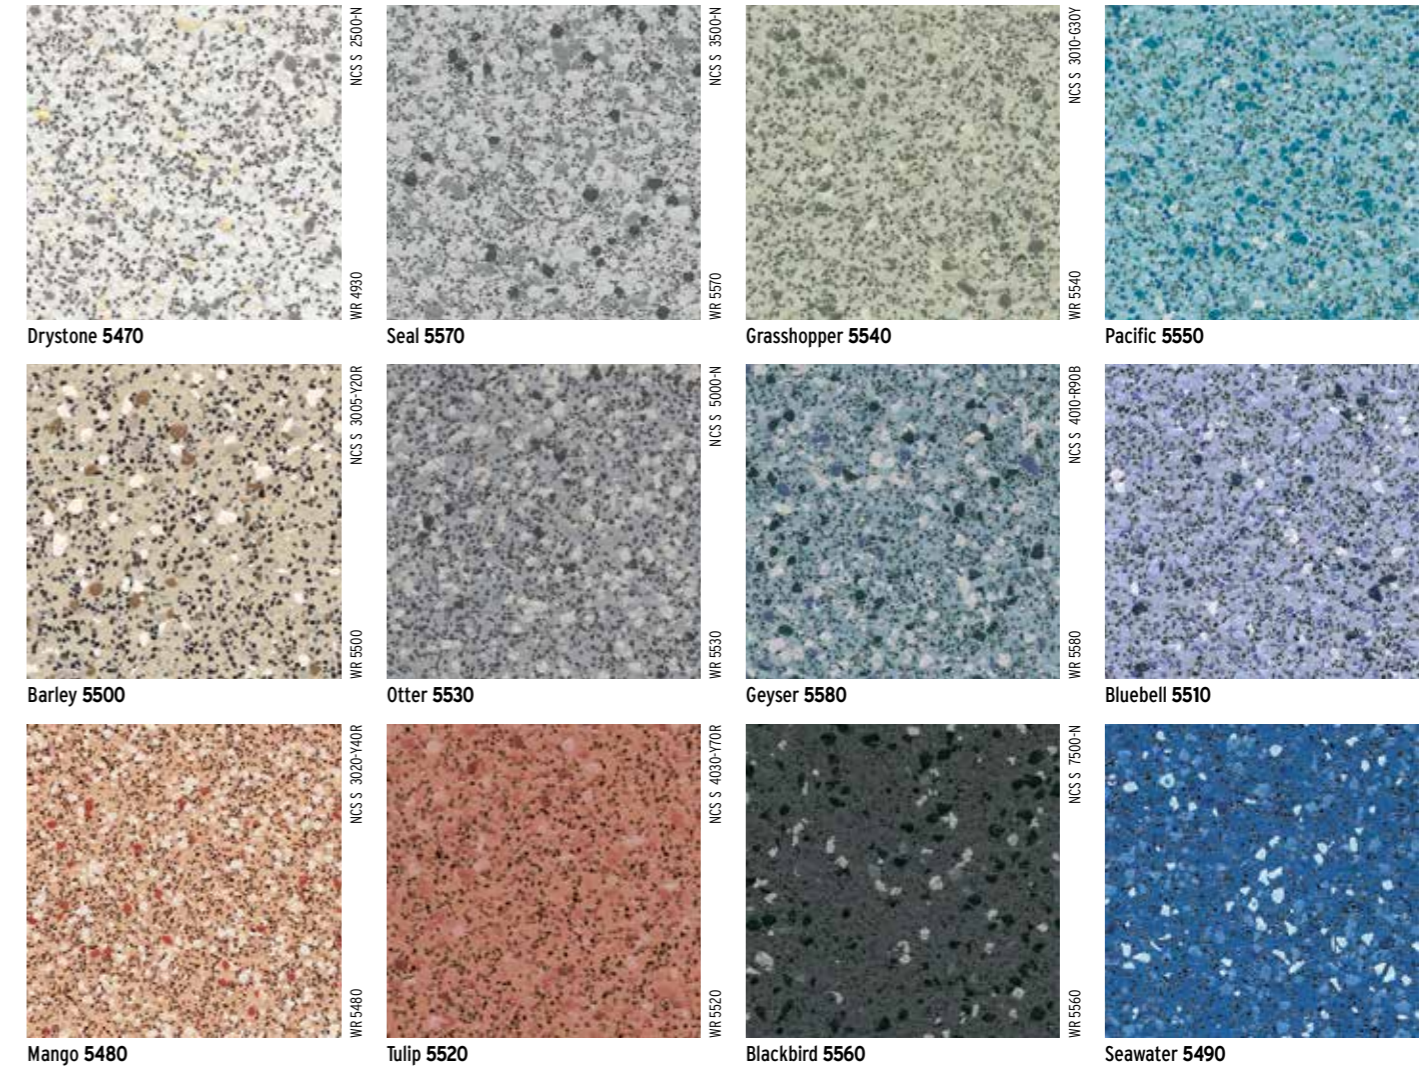

KEY FEATURES

- Features Polysafe™ PUR for optimum appearance retention and life cycle maintenance cost savings of up to 60%.
- Incorporates quartz, aluminium oxide, silicon carbide particles and recycled natural aggregates, to improve traction and safety underfoot.
- Slip resistance is assured for the guaranteed life of the product.
- ≥36 (Pendulum wet test - 4S Rubber/Slider 96).
- Conforms to EN 13845 50,000 cycles abrasion test.



Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.




SPECIFICATIONS




GAUGE: 2.0mm
 AVAILABILITY: Sheet: 2m x 20m

Polysafe Astral PUR


HEAVY-DUTY SAFETY FLOORING WITH MULTI-FLAKE DECORATION

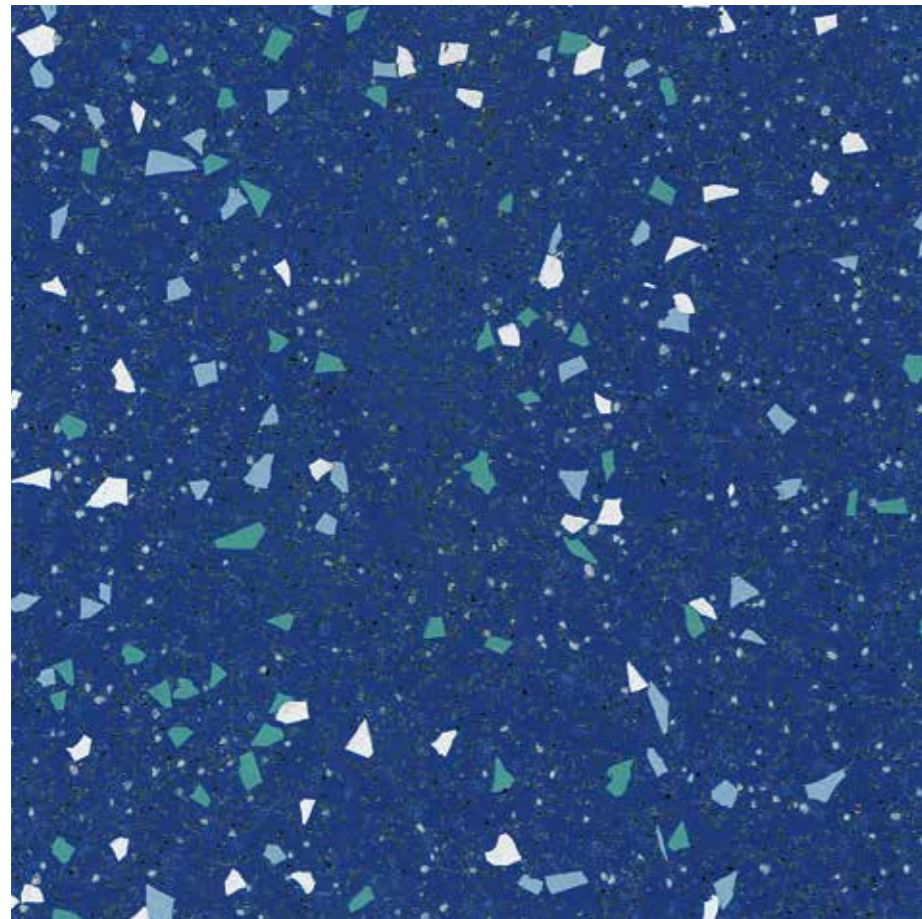


Nebula Blue 4200

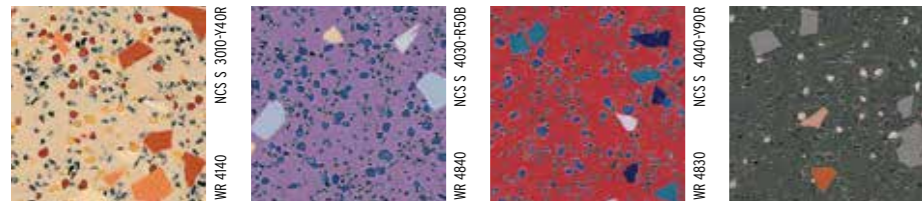


Arkose 4190* Space Mauve 4230 Red Sky 4310 Lunar Grey 4240 Black Opal 4080* Feldspar 4620* Aquarius 4220 Calcite Blue 4460* Deep Sapphire 4050*

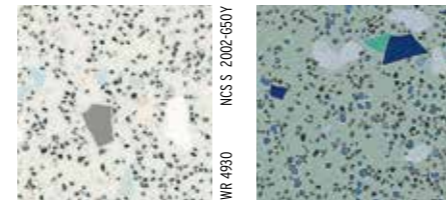


North Star 4370 Isis 4380

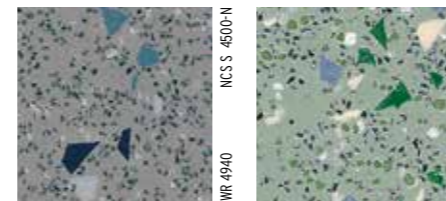

Starburst 4300 Greenstone 4440*

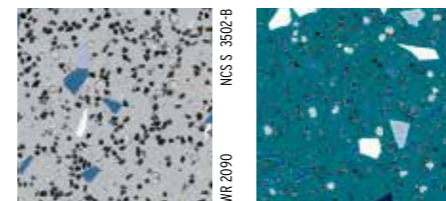

Starburst 4300 Greenstone 4440*

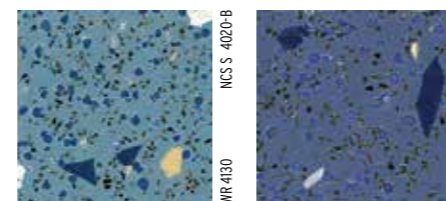

Calcite Blue 4460* Deep Sapphire 4050*

* Previously available as Polysafe Strata colours

KEY FEATURES

Features Polysafe™ PUR for optimum appearance retention and life cycle maintenance cost savings of up to 60%.

Incorporates quartz, aluminium oxide, silicon carbide particles and recycled natural aggregates, to improve traction and safety underfoot.

Slip resistance is assured for the guaranteed life of the product.

≥36 (Pendulum wet test - 4S Rubber/Slider 96).

Conforms to EN 13845 50,000 cycles abrasion test.



Refer to BRE Global ratings on www.greenbooklive.com

SPECIFICATIONS



GAUGE: 2.0mm
AVAILABILITY: Sheet: 2m x 20m

Polysafe Vogue Ultra PUR

HEAVY-DUTY, DECORATIVE SAFETY FLOORING WITH MULTI-CHIP DESIGNS



KEY FEATURES

Features Polysafe™ PUR for optimum appearance retention and life cycle maintenance cost savings of up to 60%.

Incorporates quartz, aluminium oxide, silicon carbide particles and recycled natural aggregates, to improve traction and safety underfoot.

Slip resistance is assured for the guaranteed life of the product.

≥36 (Pendulum wet test - 4S Rubber/Slider 96).

Conforms to EN 13845 50,000 cycles abrasion test.



Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.


SPECIFICATIONS



GAUGE: 2.0mm
AVAILABILITY: Sheet: 2m x 20m

Polysafe Modena PUR

HEAVY-DUTY SAFETY FLOORING FEATURING CLEAR MICRO-GRANITE DESIGNS

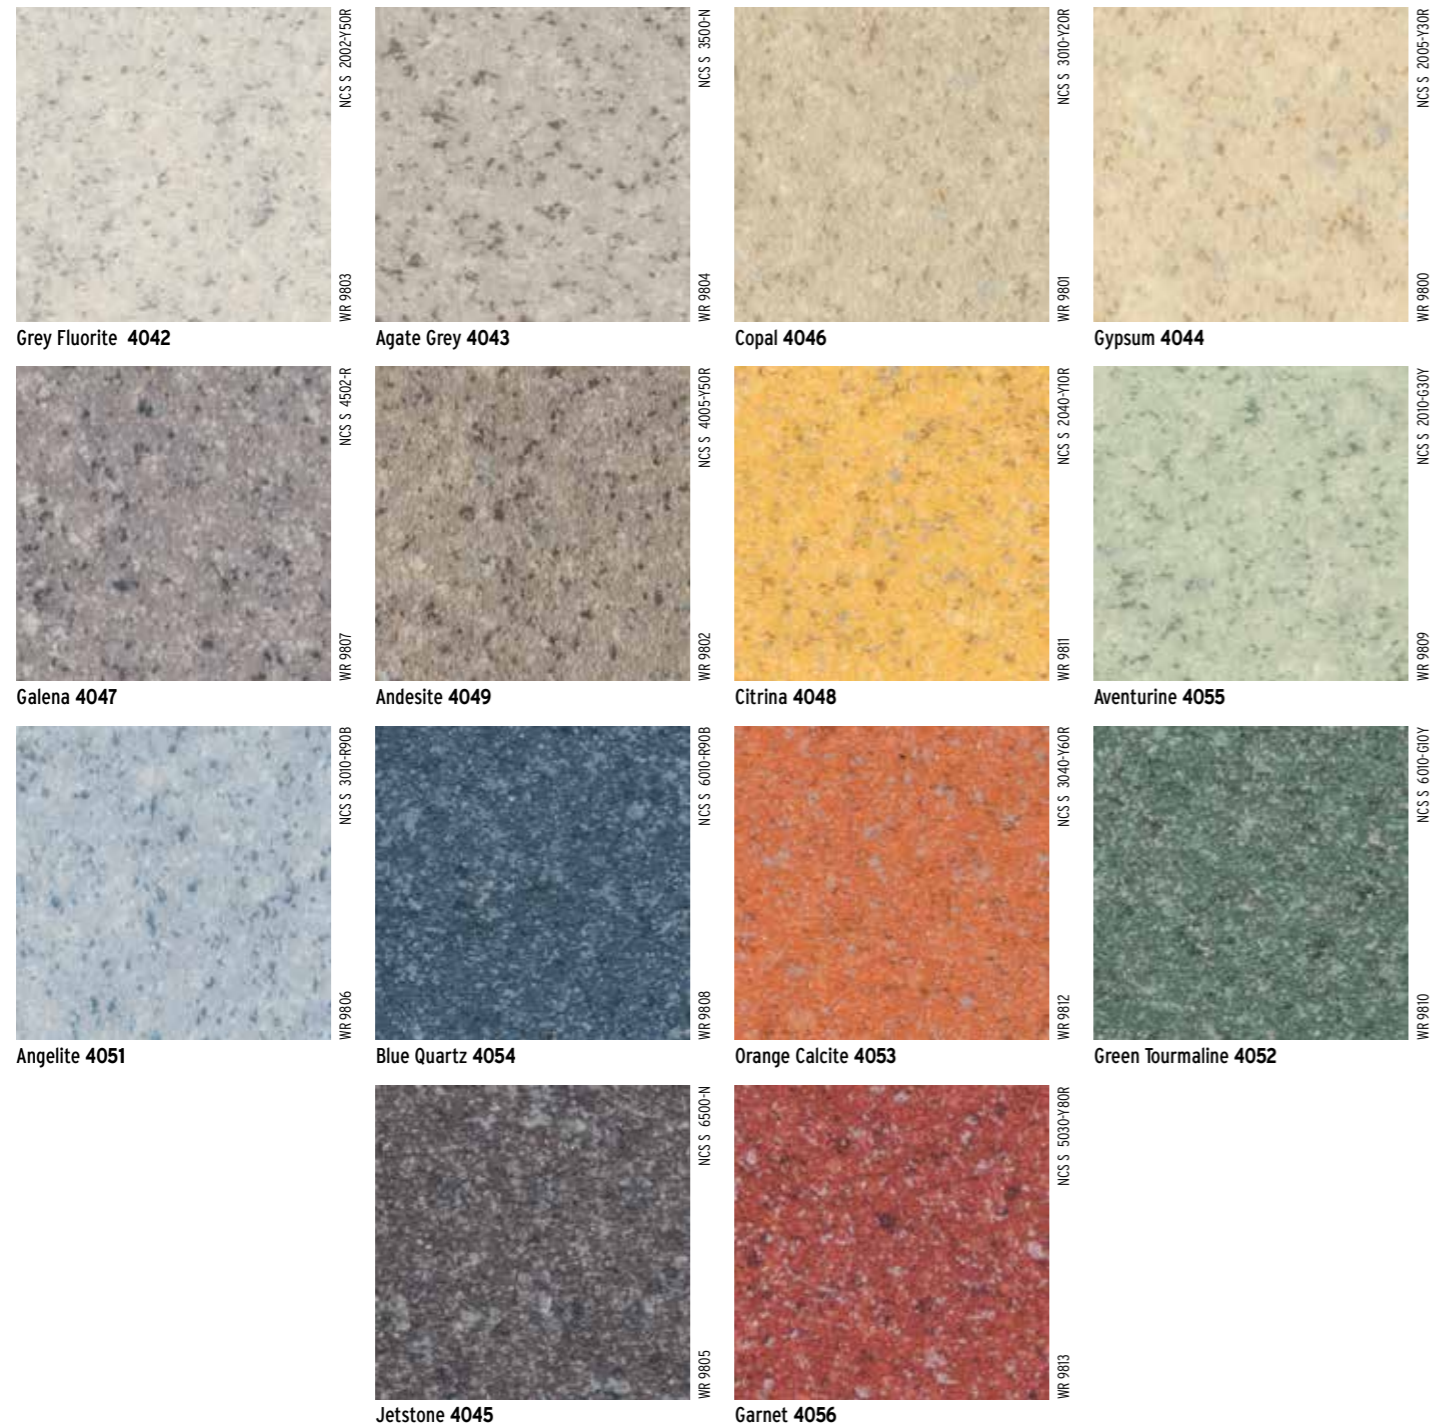

KEY FEATURES


Features Polysafe™ PUR for optimum appearance retention and life cycle maintenance cost savings of up to 60%.

Hardwearing safety flooring featuring high clarity micro granite designs. Incorporates aluminium oxide particles to improve traction and safety underfoot.

Slip resistance is assured for the guaranteed life of the product.

≥36 (Pendulum wet test - 4S Rubber/Slider 96).

Conforms to EN 13845 50,000 cycles abrasion test.



† Refer to BRE Global ratings on www.thegreenguide.org.uk



SPECIFICATIONS



GAUGE: 2.0mm, wear layer 0.7mm

AVAILABILITY: Sheet: 2m x 20m

Polysafe Arena PUR

HEAVY-DUTY SAFETY FLOORING FEATURING ABSTRACT, MATERIAL AND STONE DESIGNS



KEY FEATURES


Features Polysafe™ PUR for optimum appearance retention and life cycle maintenance cost savings of up to 60%.

Hardwearing safety flooring featuring high clarity abstract, stone and material effects. Incorporates aluminium oxide particles to improve traction and safety underfoot.

Slip resistance is assured for the guaranteed life of the product.

≥36 (Pendulum wet test - 4S Rubber/Slider 96).


Conforms to EN 13845 50,000 cycles abrasion test.



Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.



SPECIFICATIONS




GAUGE: 2.0mm, wear layer 0.7mm

AVAILABILITY: Sheet: 2m x 20m

Polysafe Verona PUR

DECORATIVE HEAVY-DUTY SAFETY FLOORING WITH COMPLEMENTARY CHIPS AND CARBORUNDUM-FREE DESIGN

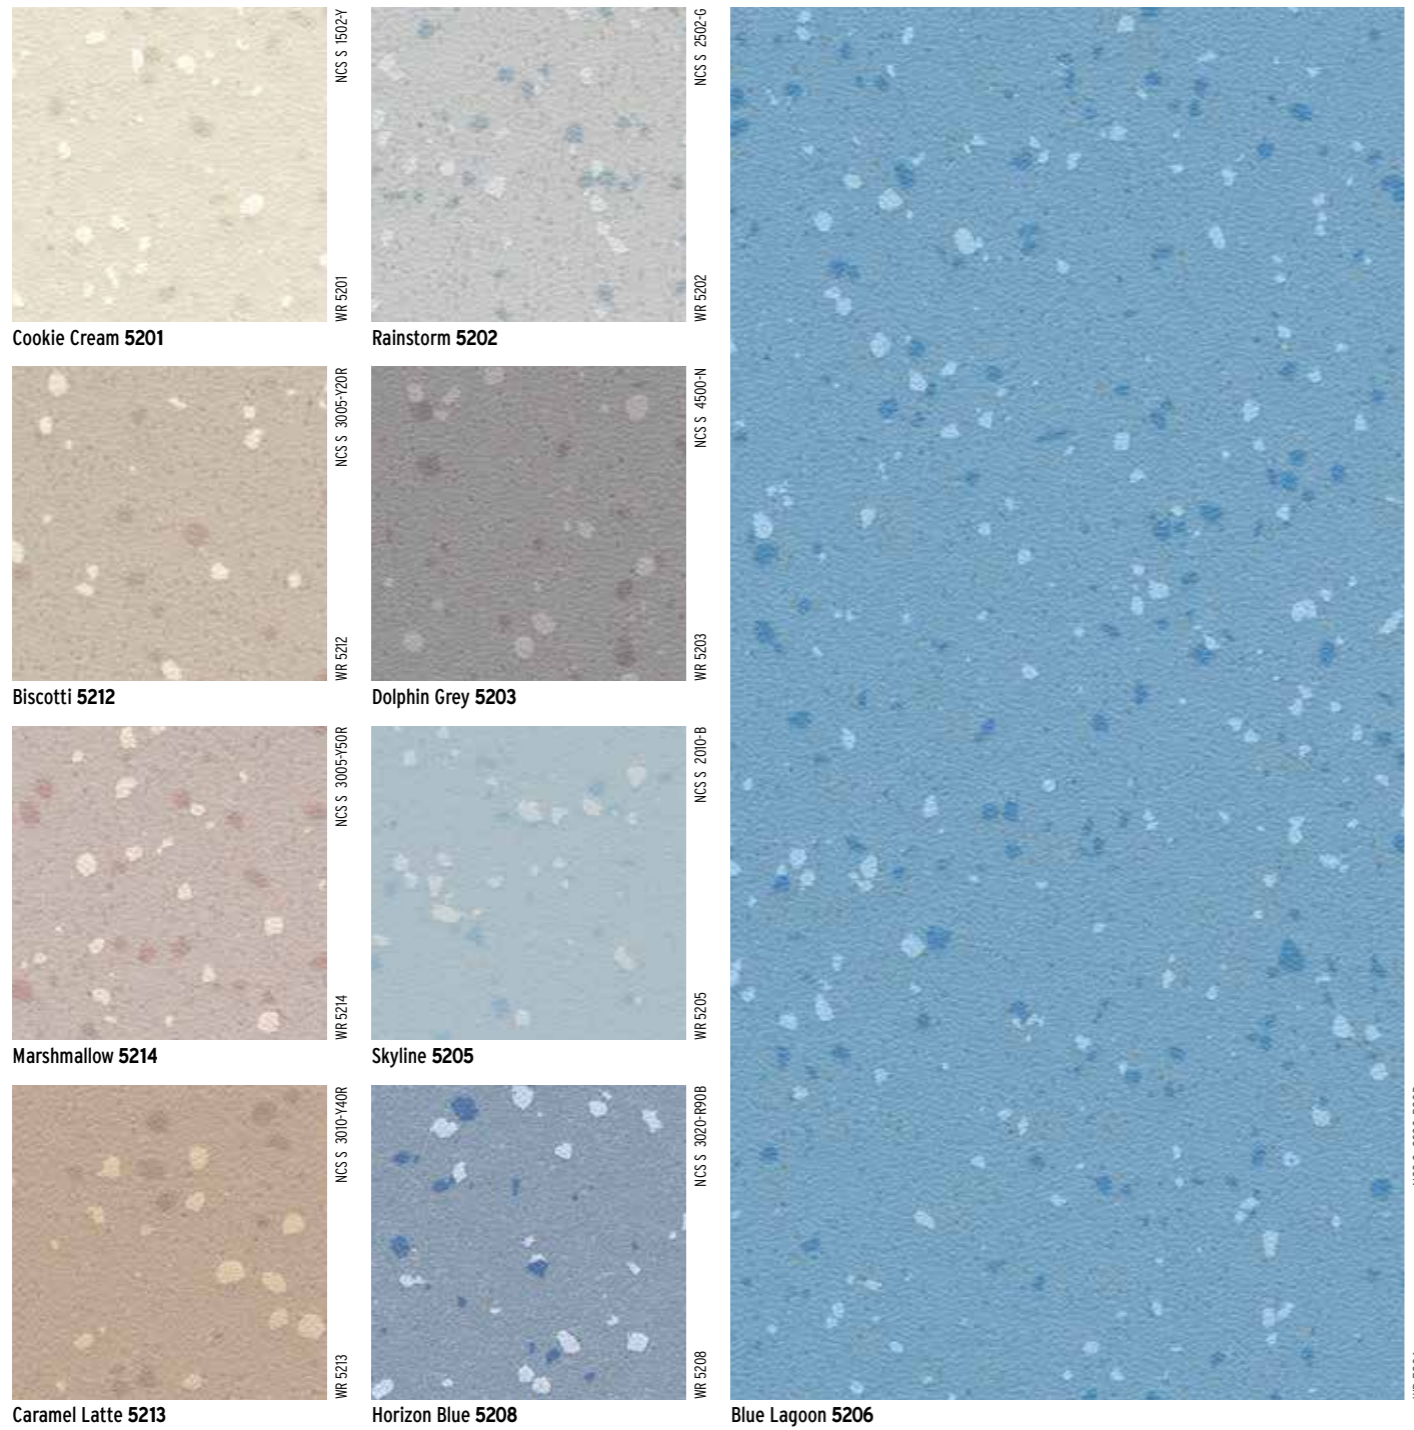


KEY FEATURES

- Carborundum-free safety flooring with high decorative appeal.
- 18 subtle pastel shades complemented by bold statement colours.
- Features complementary coloured quartz particles and natural recycled aggregates to enable a high clarity appearance.
- Slip resistance is assured for the guaranteed life of the product ≥ 36 (Pendulum wet test).
- Conforms to EN 13845 50,000 cycles abrasion test.



† Refer to BRE Global ratings on www.thegreenguide.org.uk

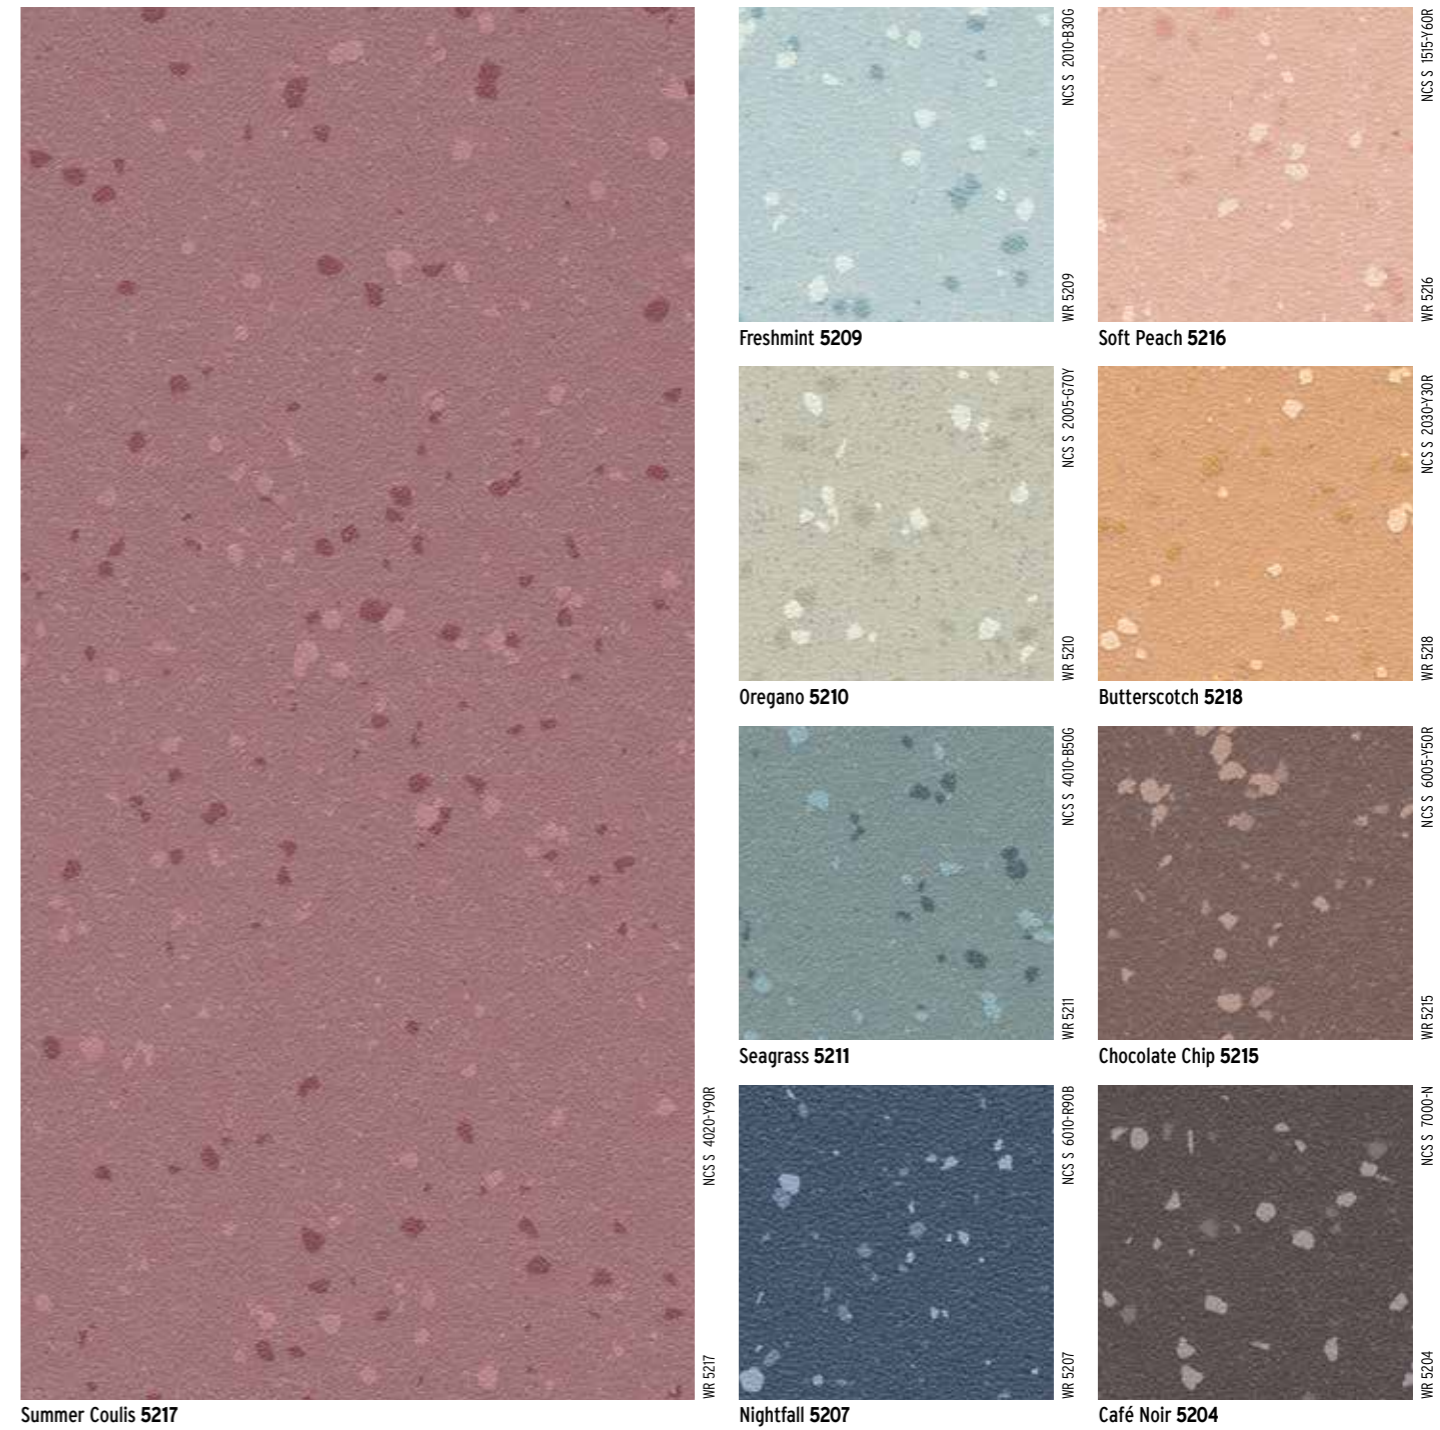

Summer Coulis 5217

Nightfall 5207

Café Noir 5204

SPECIFICATIONS



GAUGE: 2.0mm
AVAILABILITY: Sheet: 2m x 20m



Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.

Polysafe Mosaic PUR

HEAVY-DUTY SAFETY FLOORING WITH HIGH DENSITY FLAKE DECORATION AND PEARLESCENT



WR 4115
NCS S 2005-G70Y

Pearlite 4115



WR 4155
NCS S 3010-Y40R

Earthstone 4155



WR 4125
NCS S 3010-Y20R

Akoya 4125




WR 4135
NCS S 5500-N

Orient Grey 4135



WR 4195
NCS S 4010-G10Y

Green Opal 4195

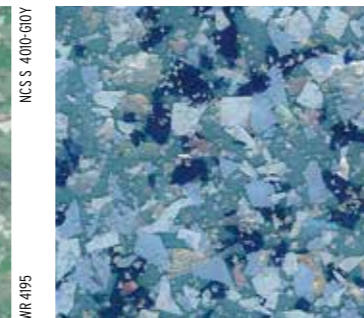


WR 4145
NCS S 4020-B10G

Freshwater 4145




WR 4105
NCS S 3502-Y

Grey Fusion 4105




WR 4185
NCS S 3030-Y70R

Sunstone 4185



WR 4175
NCS S 5020-R00B

South Sea 4175

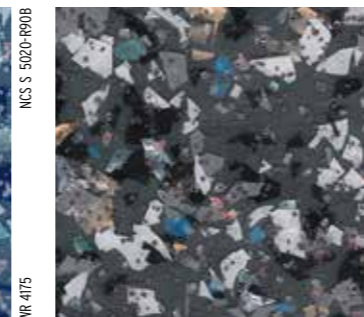

WR 4165
NCS S 6500-N

Graphite Pearl 4165

KEY FEATURES

Features Polysafe™ PUR for optimum appearance retention and life cycle maintenance cost savings of up to 60%.

Incorporates aluminium oxide and coloured quartz particles to improve traction and safety underfoot.

Slip resistance is assured for the guaranteed life of the product.

≥36 (Pendulum wet test - 4S Rubber/Slider 96).

Conforms to EN 13845 50,000 cycles abrasion test.



° Refer to BRE Global ratings on www.greenbooklive.com



SPECIFICATIONS



GAUGE: 2.0mm, wear layer 0.7mm

AVAILABILITY: Sheet: 2m x 20m

It is recommended that a larger piece is viewed at floor level to appreciate the decoration

NEW Polysafe Wood fx PUR

HEAVY-DUTY SAFETY FLOORING FEATURING SOPHISTICATED WOOD DESIGNS




WR 3374
plank w/l: 166 x 1500mm

Oiled Oak 3374



WR 3372
plank w/l: 200 x 1500mm

Sun Bleached Oak 3372



WR 3357
plank w/l: 83 x 333/666mm

Silver Oak 3357



WR 3375
plank w/l: 166 x 1500mm

Roasted Limed Ash 3375



WR 3376
plank w/l: 166 x 1500mm

Tropical Pine 3376




WR 3387
plank w/l: 100 x 1000mm

American Oak 3387



WR 3297
plank w/l: 100 x 500mm

Warm Beech 3297




WR 3337
plank w/l: 83 x 333/666mm

Rustic Oak 3337




WR 3107
plank w/l: 166 x 1500mm

Classic Oak 3107

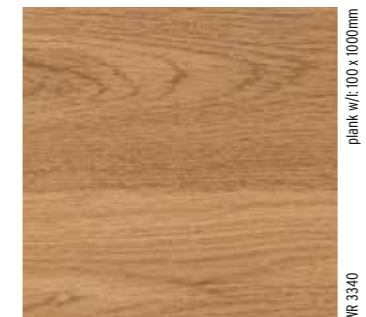

WR 3347
plank w/l: 100 x 1000mm

European Oak 3347

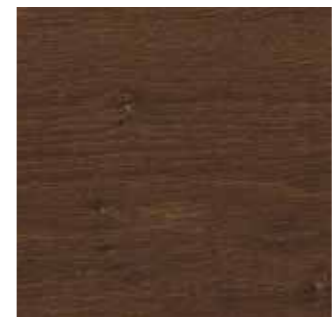

WR 3373
plank w/l: 200 x 1500mm

Aged Oak 3373



WR 3371
plank w/l: 125 x 1000mm

Nero Oak 3371

KEY FEATURES

Features Polysafe™ PUR for optimum appearance retention and life cycle maintenance cost savings of up to 60%.


Hardwearing safety floorcovering featuring authentic and contemporary wood designs.

Incorporates aluminium oxide particles to improve traction and safety underfoot.

Slip resistance is assured for the guaranteed life of the product.

≥36 (Pendulum wet test - 4S Rubber/Slider 96).

Conforms to EN 13845 50,000 cycles abrasion test.



Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.



SPECIFICATIONS




GAUGE: 2.0mm, wear layer 0.7mm

AVAILABILITY: Sheet: 2m x 20m

This product is a highly realistic replication of natural materials. Hence, on many designs, features such as knots will be present, as well as natural colour variation.

Polysafe Standard PUR

HEAVY-DUTY SAFETY FLOORING WITH A TRADITIONAL DECORATION

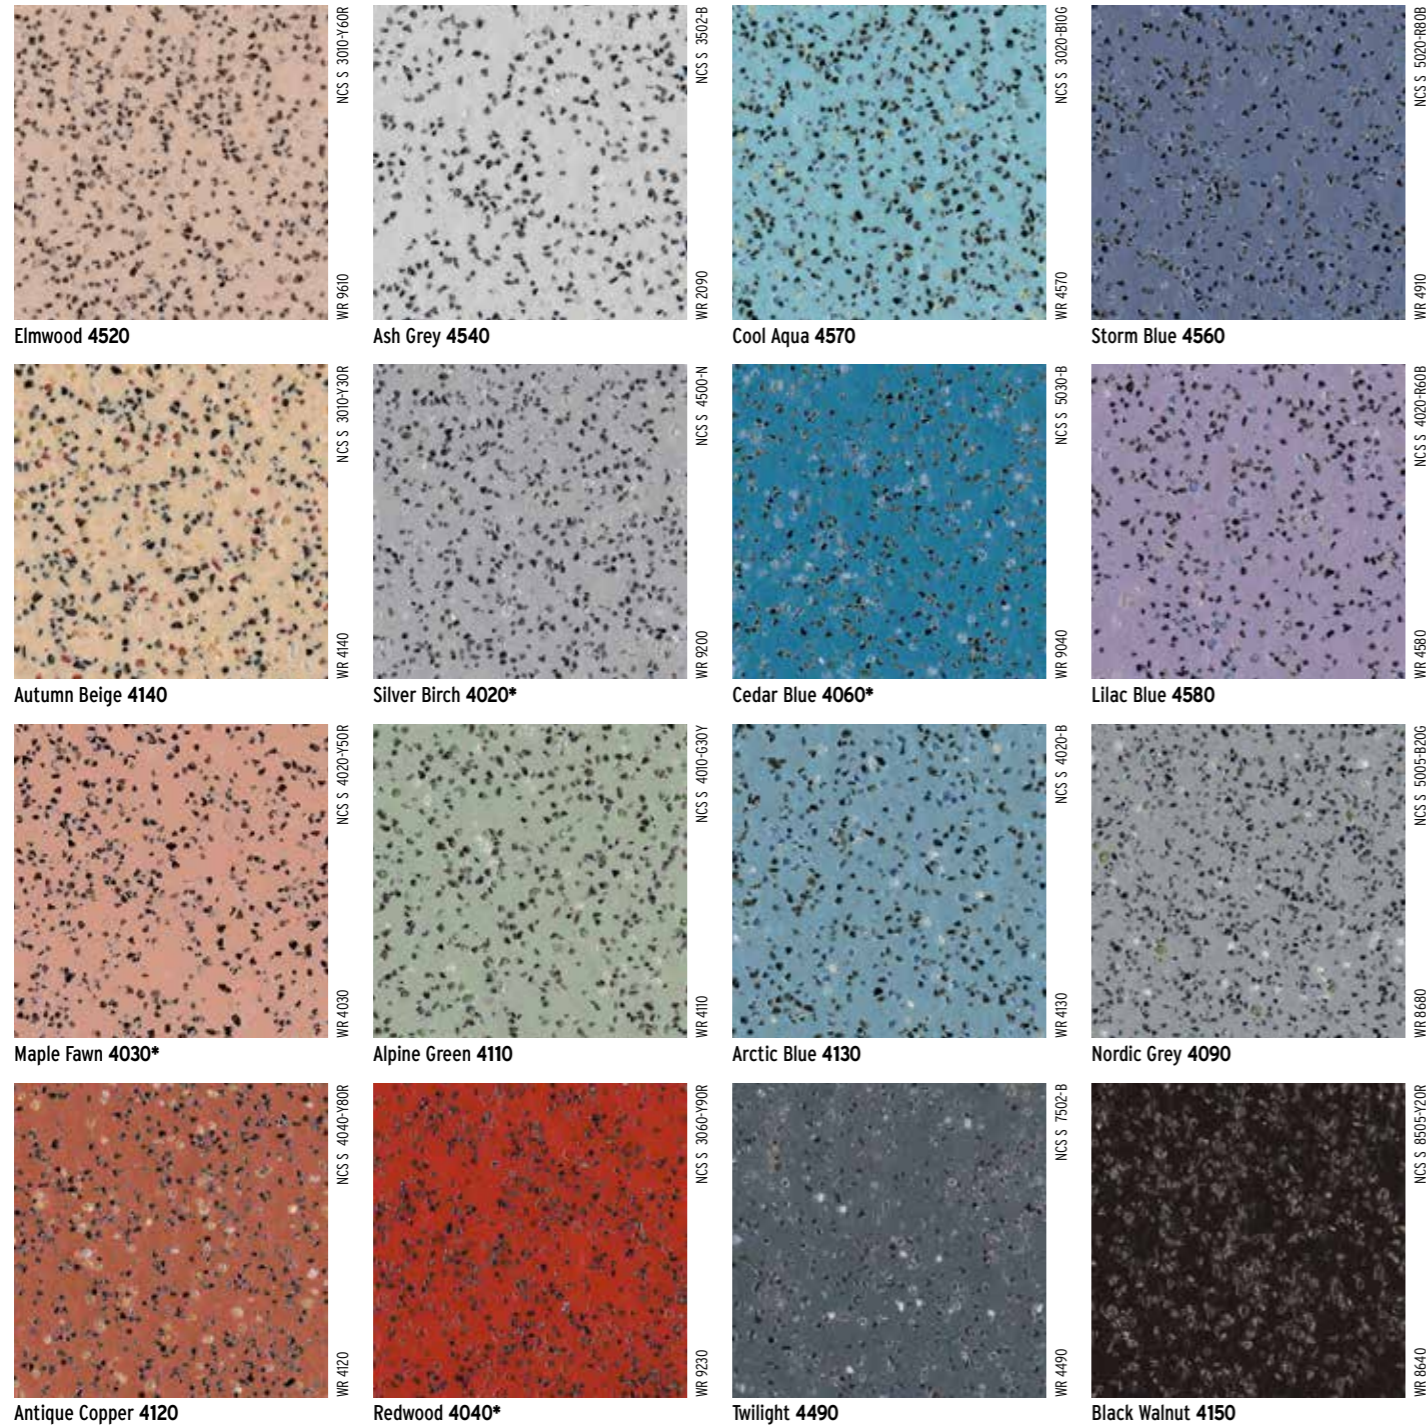

KEY FEATURES

Features Polysafe™ PUR for optimum appearance retention and life cycle maintenance cost savings of up to 60%.
 Incorporates quartz, aluminium oxide, silicon carbide particles and recycled natural aggregates, to improve traction and safety underfoot.
 Slip resistance is assured for the guaranteed life of the product. ≥ 36 (Pendulum wet test - 4S Rubber/Slider 96).
 Conforms to EN 13845 50,000 cycles abrasion test.



* Refer to BRE Global ratings on www.greenbooklive.com

SPECIFICATIONS




GAUGE: 2.0mm, 2.5mm, 3.5mm*
AVAILABILITY: Sheet: 2m x 20m
 2m x 15m (3.5mm)

* 4 colours are available ex-stock in 3.5mm.



Polysafe Ultima*

SAFETY FLOORING WITH A MULTI-CHIP DECORATION, DESIGNED FOR HEAVY USE AREAS WHICH REQUIRE ENHANCED SLIP RESISTANCE

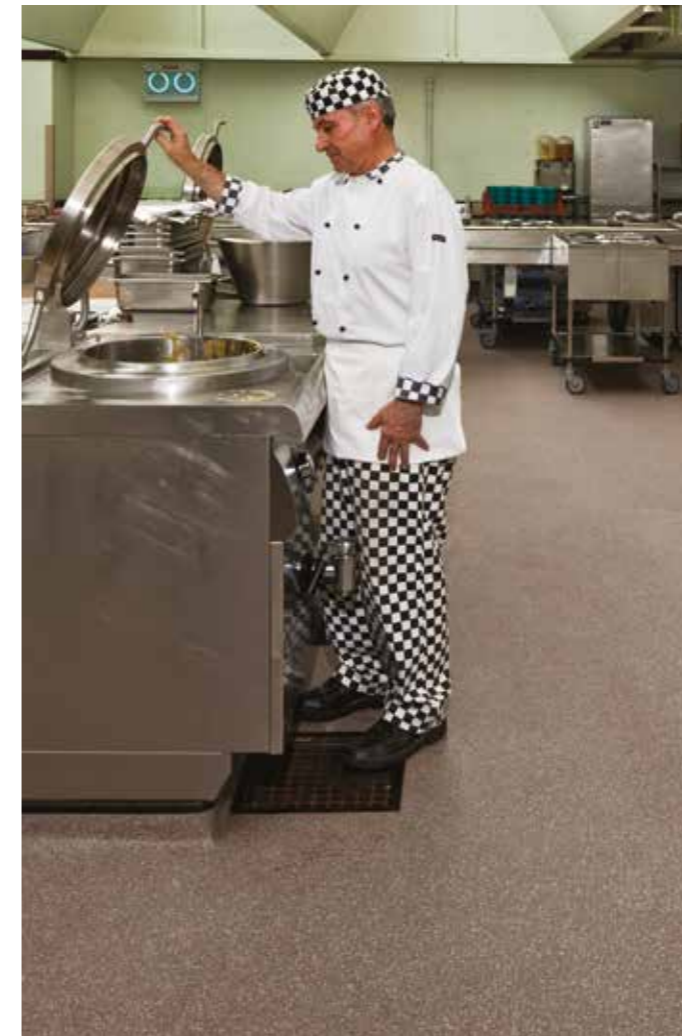


* This product is known as **Ultimate** in the USA.



KEY FEATURES

Enhanced levels of traction and safety underfoot due to high aggregate concentration and a specially engineered emboss.
 Ideal for high footfall areas, such as food preparation areas or busy commercial kitchens, with risks of oil and grease spillages. Can also be used in continually wet and barefoot areas.
 Slip resistance is assured for the guaranteed life of the product. ≥ 40 (Pendulum wet test - 4S Rubber) and ≥ 36 (TRL Rubber) with a surface roughness of Rz $\geq 70\mu\text{m}$.



Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.




SPECIFICATIONS




GAUGE: 2.5mm
AVAILABILITY: Sheet: 2m x 20m

Polysafe Hydro


HEAVY-DUTY SAFETY FLOORING WITH A RAISED EMOSS, FOR USE IN BAREFOOT AND SHOD AREAS

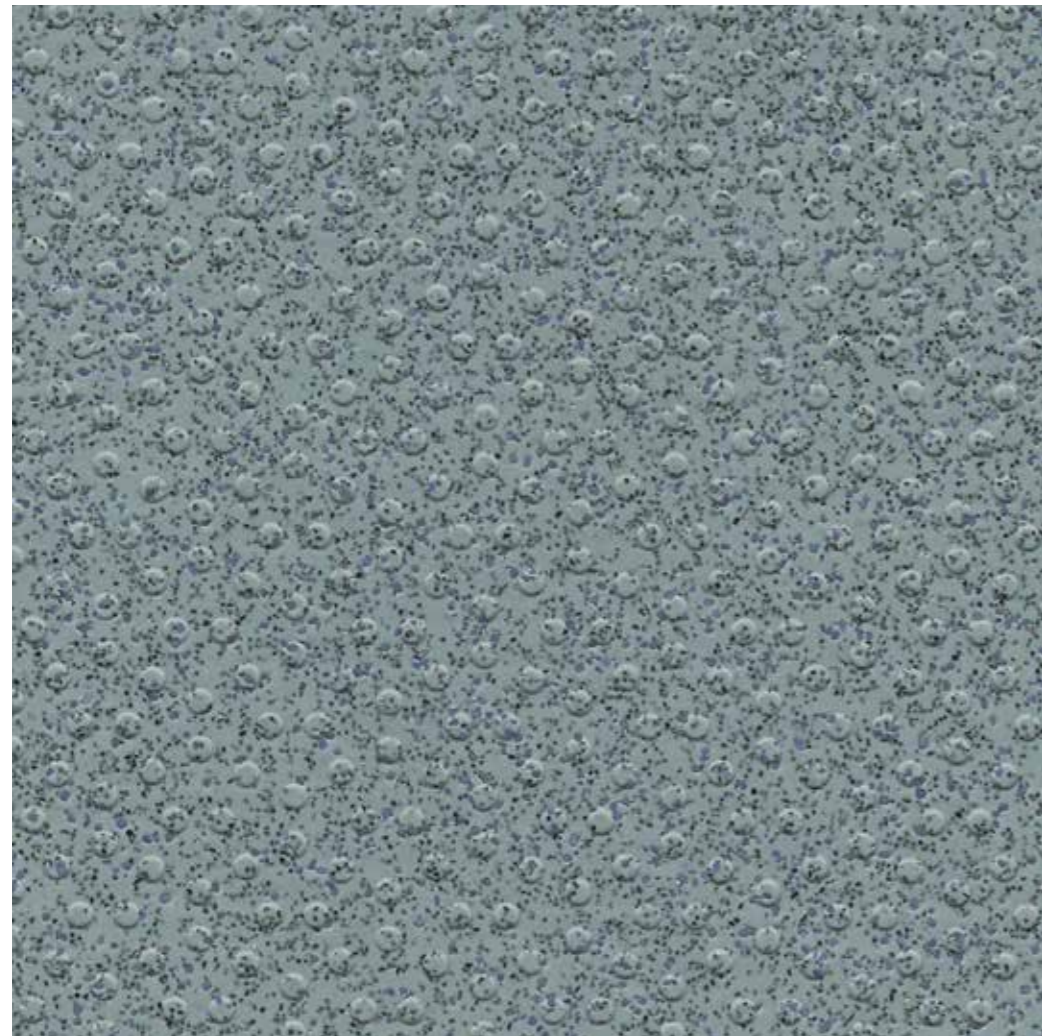


Sheared Slate H4960

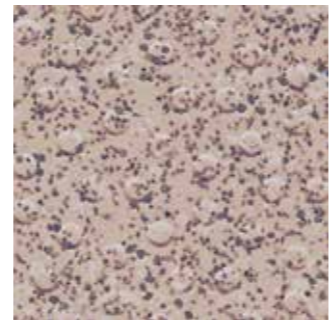


Oystershell H4800

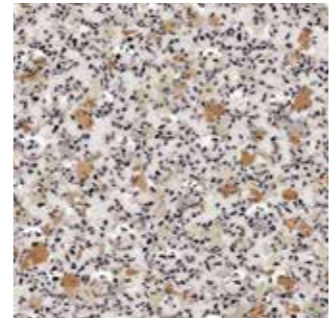


Bisque H4860

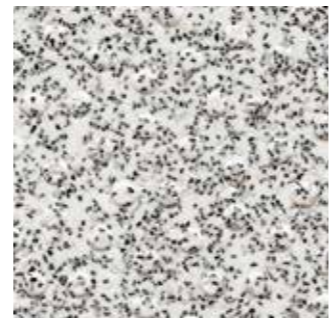


White Stone H4930

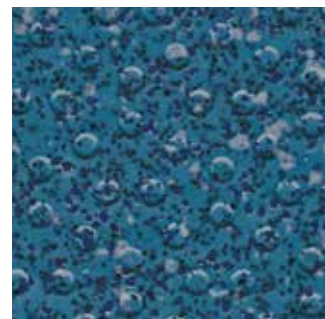


Marine H4870

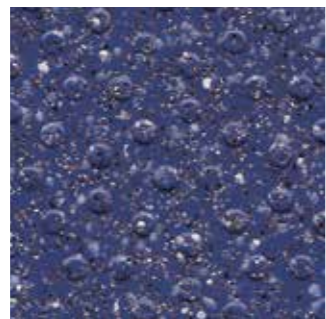

Blue Forge H4850

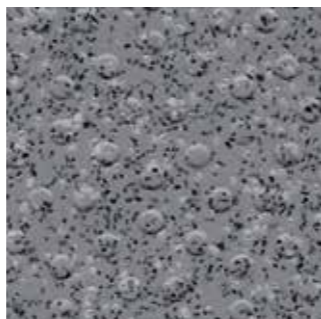


Tempered Steel H4940

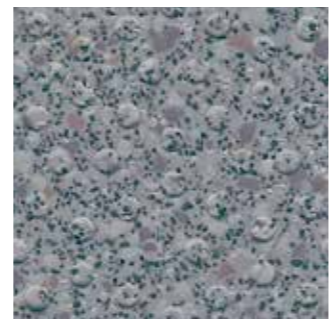


Woodland Grey H4770

Polysafe Hydro Evolve


HEAVY-DUTY SAFETY FLOORING WITH A RAISED EMOSS, FOR USE IN BAREFOOT AND SHOD AREAS

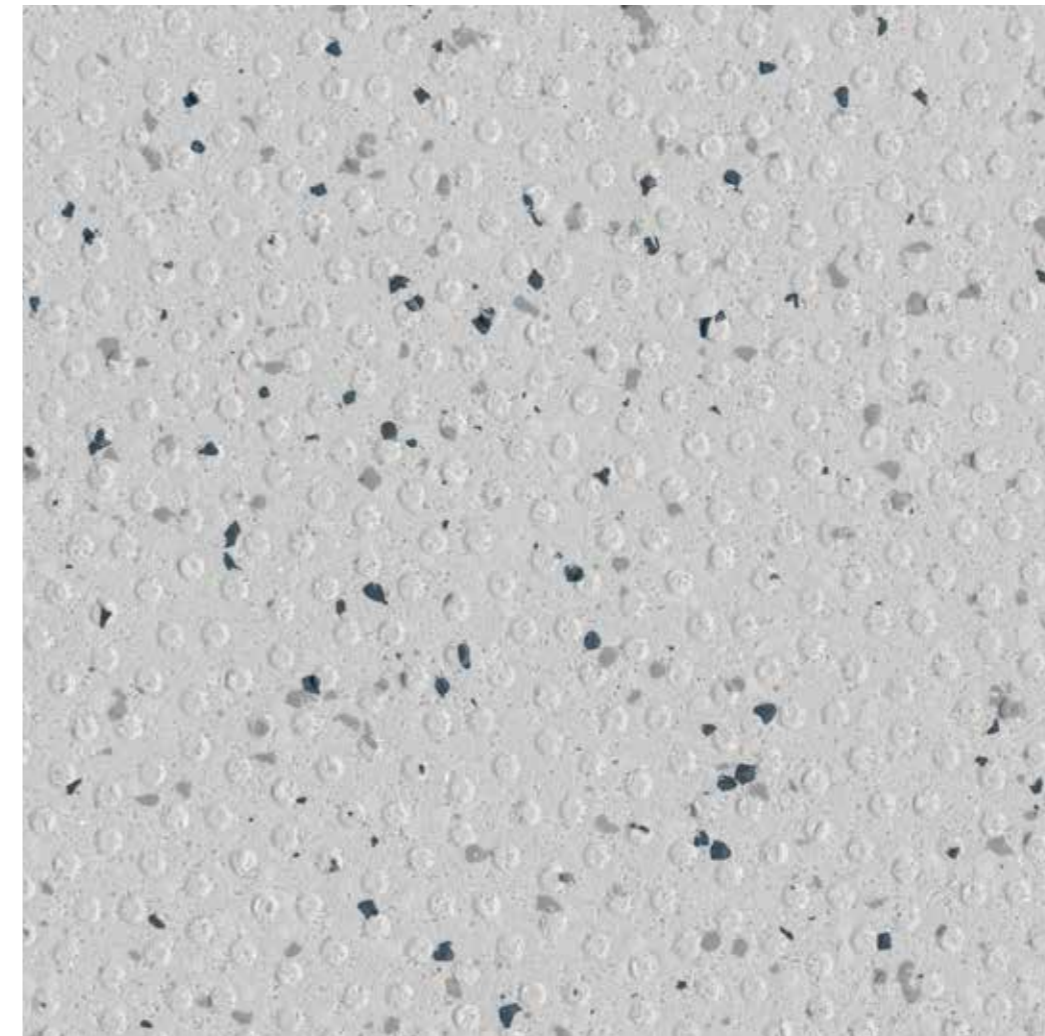


Colorado 4253

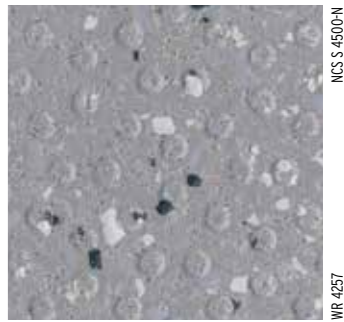

Tigris 4257

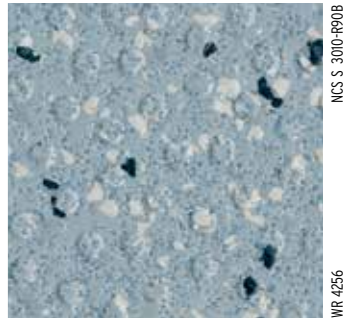


Blue Nile 4256

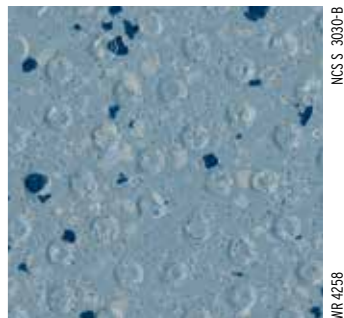


Adriatic 4258




Danube 4254

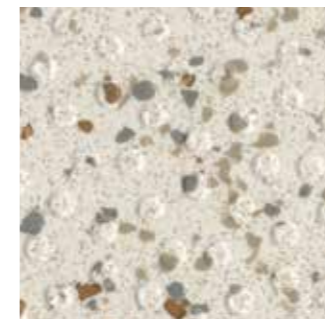

Amazon 4252

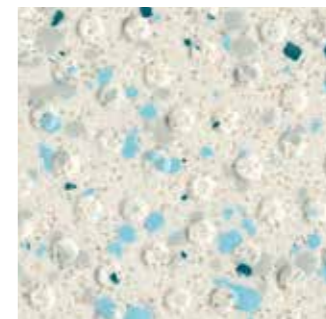

Indus 4251

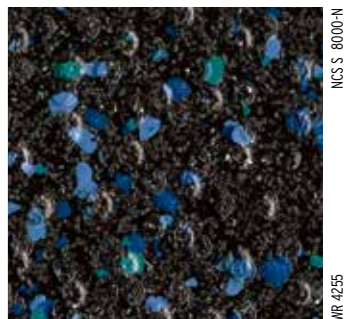

Black Volta 4255

KEY FEATURES

Designed for barefoot and continually wet areas. Can also be used in shod areas subject to end user's risk assessment.

Features pimple emboss and a choice of multi-chip or traditional decorations.

Slip resistance is assured for the guaranteed life of the product.

≥36 (Pendulum wet test - TRL/4S Rubber).

Conforms to EN 13845 50,000 cycles abrasion test.



* Refer to BRE Global ratings on www.greenbooklive.com



SPECIFICATIONS



GAUGE: 2.0mm

AVAILABILITY: Sheet: 2m x 20m

KEY FEATURES

Designed for barefoot and continually wet areas. Can also be used in shod areas subject to end user's risk assessment.

Features pimple emboss and carborundum-free safety aggregates.

Slip resistance is assured for the guaranteed life of the product.

≥36 (Pendulum wet test - TRL/4S Rubber).

Conforms to EN 13845 50,000 cycles abrasion test.



† Refer to BRE Global ratings on www.thegreenguide.org.uk



SPECIFICATIONS



GAUGE: 2.0mm

AVAILABILITY: Sheet: 2m x 20m

Polysafe Wood fx Acoustix PUR


HEAVY-DUTY SAFETY FLOORING WITH ACOUSTIC PROPERTIES, FEATURING SOPHISTICATED WOOD DESIGNS




Brazilian Walnut 3992



Silver Oak 3352

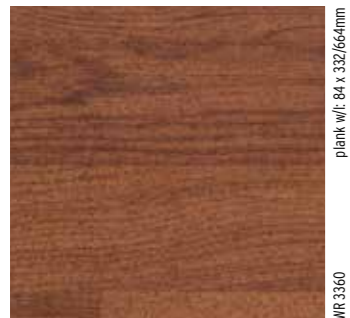

Mahogany 3362

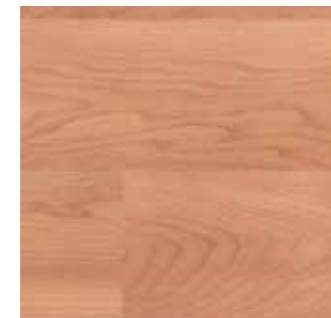

Cherry 3302




Warm Beech 3292



American Oak 3382




Rustic Oak 3332

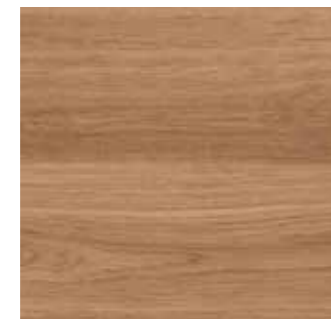

European Oak 3342

KEY FEATURES

- Features Polysafe™ PUR for optimum appearance retention and life cycle maintenance cost savings of up to 60%.
- Hardwearing safety floorcovering featuring authentic and contemporary wood designs.
- Slip resistance is assured for the guaranteed life of the product. ≥ 36 (Pendulum wet test - 4S Rubber/Slider 96).
- ≥ 19 dB impact sound reduction level to exceed Building Regulation Part E requirements.
- Ergonomically designed for anti-fatigue benefits. Conforms to EN 651.



SPECIFICATIONS




GAUGE: 3.7mm, wear layer 0.65mm
AVAILABILITY: Sheet: 2m x 20m


This product is a highly realistic replication of natural materials. Hence, on many designs, features such as knots will be present, as well as natural colour variation.

Polysafe Apex


HEAVY-DUTY SAFETY FLOORING WITH ENHANCED SLIP RESISTANCE FOR EXTREME AREAS

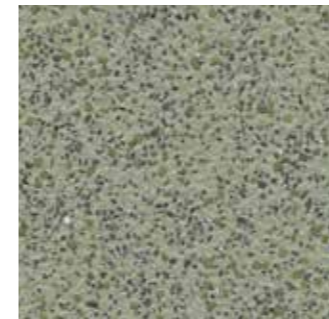


Green Quartz 4201

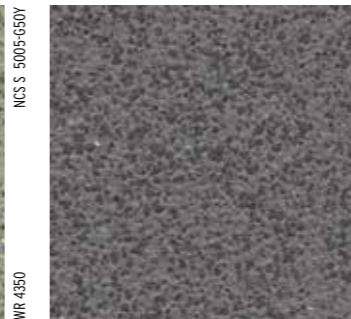


Chromite 4202

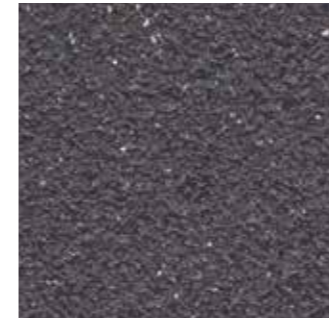


Biotite 4203

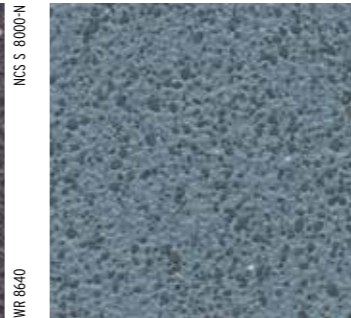

Breccia 4204

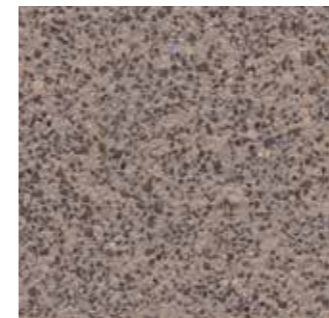

Siltstone 4205

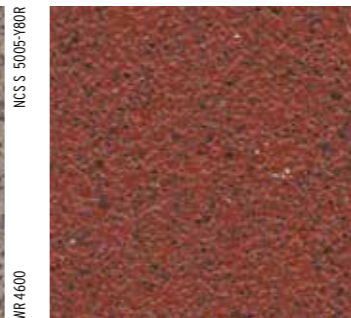


Red Ochre 4206



KEY FEATURES

- Enhanced levels of traction and safety underfoot due to high aggregate concentration and a specially engineered emboss.
- Designed for busy commercial kitchen areas serving over 100 daily meals and suited to industrial food processing environments with regular spillage of oil and grease.
- Slip resistance is assured for the guaranteed life of the product ≥ 45 (Pendulum wet test - 4S Rubber) with surface roughness of $Rz \geq 70\mu m$.
- R12 rated product.




Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.

SPECIFICATIONS



GAUGE: 2.5mm
AVAILABILITY: Sheet: 2m x 20m

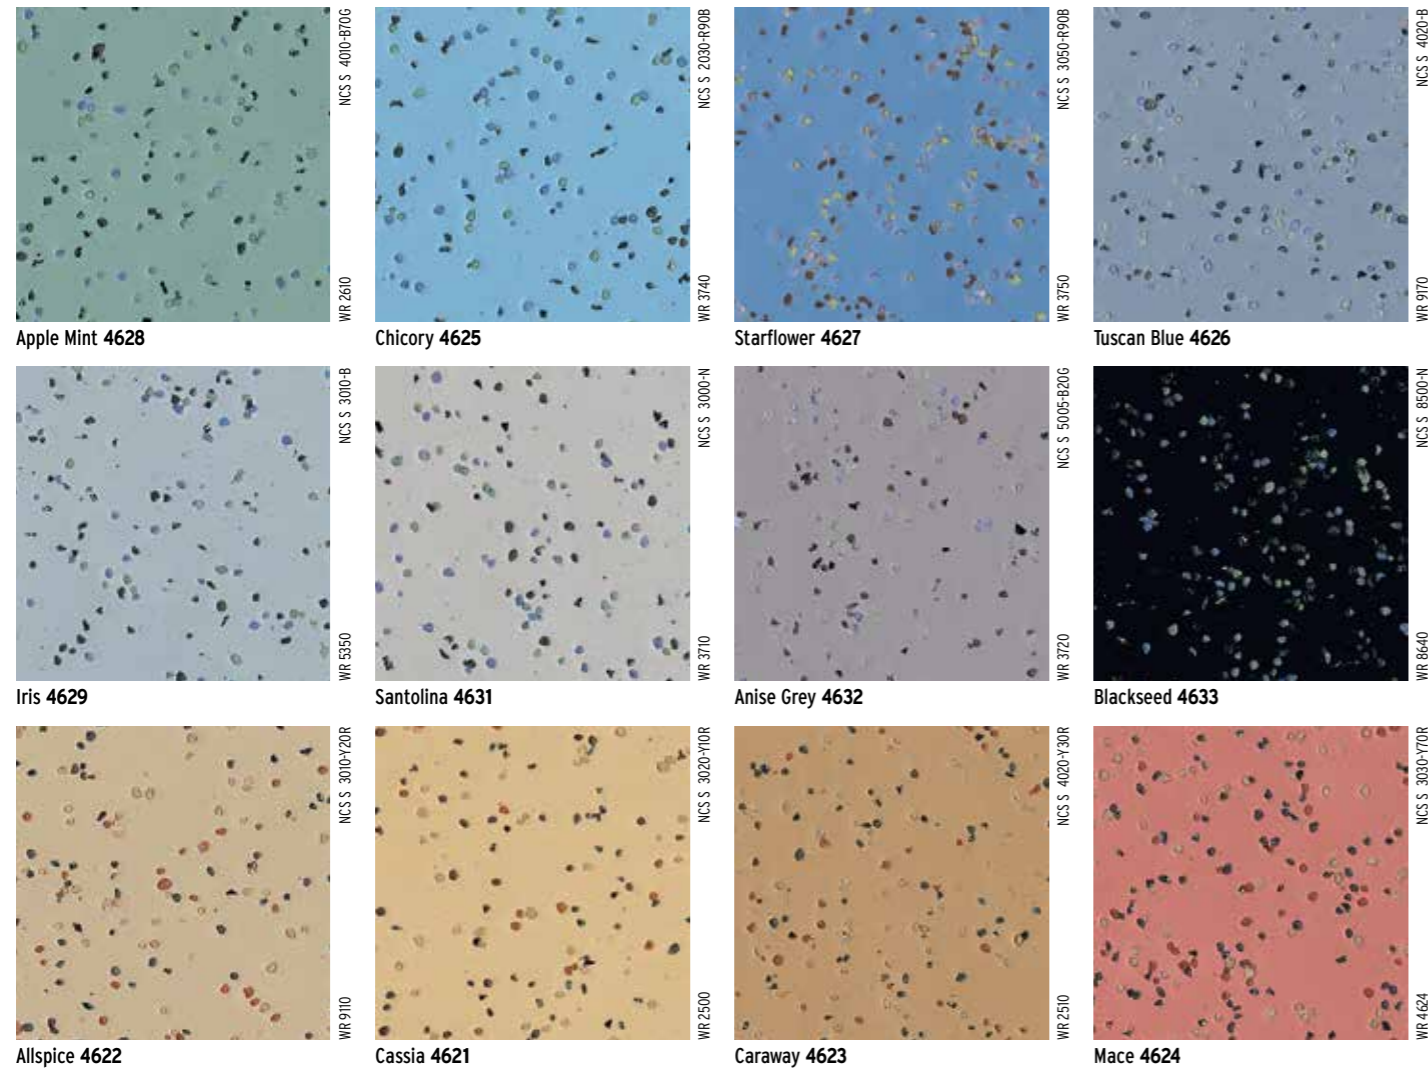

KEY FEATURES


Incorporates complementary coloured quartz and silicon carbide particles, to improve traction and safety underfoot.

All the Polyflor XL hallmarks, now engineered as a safety range.

Conforms to EN 13845 50,000 cycles abrasion test.

Slip resistance is assured for the guaranteed life of the product.

≥36 (Pendulum wet test - 4S Rubber/Slider 96).



† Refer to BRE Global ratings on www.thegreenguide.org.uk



SPECIFICATIONS



GAUGE: 2.0mm

AVAILABILITY: Sheet: 2m x 20m




KEY FEATURES

Heterogeneous commercial vinyl sheet floorcovering.

Highly realistic wood designs in a choice of 14 shades.

Polyurethane reinforcement, to facilitate a low-cost, polish-free maintenance regime.

Conforms to EN 649 / EN ISO 10582.



* Refer to BRE Global ratings on www.thegreenguide.org.uk



SPECIFICATIONS



GAUGE: 2.0mm, wear layer 0.7mm

AVAILABILITY: Sheet: 2m x 20m

This product is a highly realistic replication of natural materials. Hence, on many designs, features such as knots will be present, as well as natural colour variation.

Acoustix Forest fx PUR

HARDWEARING COMMERCIAL SHEET VINYL FLOORCOVERING PROVIDING IMPACT SOUND REDUCTION OF 19dB



plank w/l: 84 x 332/664mm
WR 3330


Rustic Oak 3335



plank w/l: 167 x 1500mm
WR 2990

Oiled Oak 3095

WIDE PLANK DESIGN

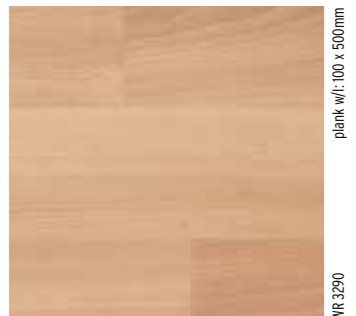

plank w/l: 100 x 500mm
WR 3290

Warm Beech 3295



plank w/l: 100 x 1000mm
WR 3380

American Oak 3385



plank w/l: 167 x 1500mm
WR 3330

Classic Oak 3125

WIDE PLANK DESIGN



plank w/l: 167 x 1500mm
WR 3150

Smoked Oak 3155

WIDE PLANK DESIGN



plank w/l: 100 x 1000mm
WR 3340

European Oak 3345




plank w/l: 167 x 1000mm
WR 3230

Classic Walnut 3235

WIDE PLANK DESIGN

KEY FEATURES

- Heterogeneous vinyl sheet flooring designed for areas which require impact noise reduction.
- Choice of highly realistic and popular wood designs.
- Polyurethane reinforcement to facilitate a lifelong, low-cost, polish-free maintenance regime.
- Conforms to EN 651.



SPECIFICATIONS



GAUGE: 3.7mm, wear layer 0.65mm
AVAILABILITY: Sheet: 2m x 20m

This product is a highly realistic replication of natural materials. Hence, on many designs, features such as knots will be present, as well as natural colour variation.

Acoustix Gallery fx PUR

HARDWEARING COMMERCIAL SHEET VINYL FLOORCOVERING PROVIDING IMPACT SOUND REDUCTION OF 19dB



plank w/l: 100 x 500mm
WR 3290

Vermont Maple 6837




NCS S 2002-Y50R
WR 9803

Mercury 6840



NCS S 3500-N
WR 9804

Zinc 6841

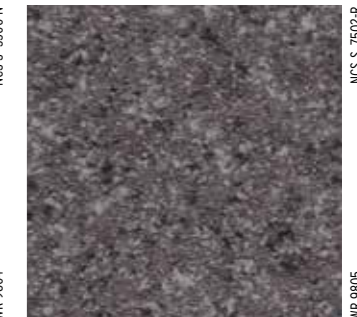

NCS S 7502-R
WR 9805

Onyx 6842



plank w/l: 100 x 1000mm
WR 3380

American Oak 6815




NCS S 2005-Y30R
WR 9800

Silica Sand 6843



NCS S 3010-Y20R
WR 9801

Mica Sand 6844

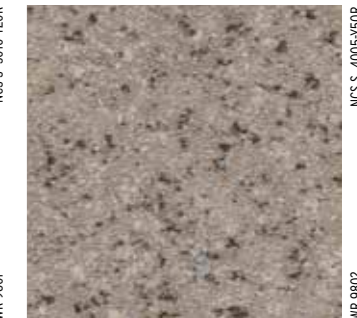

NCS S 4005-Y50R
WR 9802

Earth 6845




plank w/l: 84 x 332/664mm
WR 3330

Rustic Oak 6836




NCS S 3010-G50Y
WR 9809

Euclase Green 6846

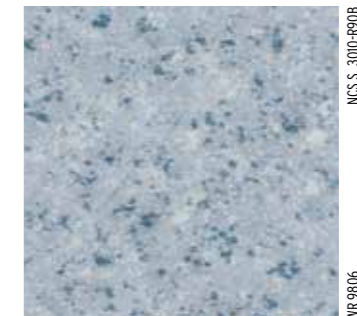

NCS S 3010-R90B
WR 9806

Celestine Blue 6847

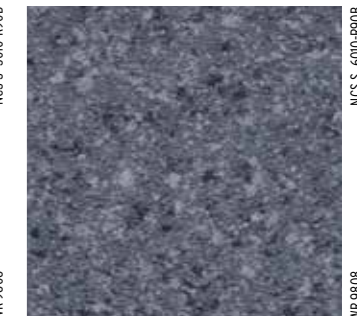

NCS S 6010-R90B
WR 9808

Lazulite Blue 6848



plank w/l: 100 x 1000mm
WR 3340

European Oak 6835




plank w/l: 100 x 500mm
WR 3110

Stained Maple 6838

KEY FEATURES

- Heterogeneous vinyl sheet flooring designed for areas which require impact noise reduction.
- Choice of highly realistic wood and micro-granite designs.
- Polyurethane reinforcement to facilitate a lifelong, low-cost polish-free maintenance regime.
- Conforms to EN 651.



Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.

SPECIFICATIONS



GAUGE: 3.7mm, wear layer 0.6mm
AVAILABILITY: Sheet: 2m x 20m

This product is a highly realistic replication of natural materials. Hence, on many designs, features such as knots will be present, as well as natural colour variation.

Acoustix Harmony fx PUR

HARDWEARING COMMERCIAL SHEET VINYL FLOORCOVERING PROVIDING IMPACT SOUND REDUCTION OF 19dB



plank w/l: 100 x 500mm

WR 3290

Warm Beech Compact: 3290
Acoustic: 3295/3 (U3) 3295/4 (U4)



plank w/l: 167 x 1500mm

WR 3150

Smoked Oak Compact: 3150
Acoustic: 3155/3 (U3) 3155/4 (U4)



plank w/l: 100 x 1000mm

WR 3380

American Oak Compact: 3380
Acoustic: 3385/3 (U3) 3385/4 (U4)



plank w/l: 84 x 332/664mm

WR 3330

Rustic Oak Compact: 3330
Acoustic: 3335/3 (U3) 3335/4 (U4)



plank w/l: 167 x 1500mm

WR 3330

Classic Oak Compact: 3100
Acoustic: 3125/3 (U3) 3125/4 (U4)



plank w/l: 167 x 1500mm

WR 2990


Oiled Oak Compact: 2990
Acoustic: 3095/3 (U3) 3095/4 (U4)



plank w/l: 100 x 1000mm

WR 3340

European Oak Compact: 3340
Acoustic: 3345/3 (U3) 3345/4 (U4)



plank w/l: 167 x 1500mm

WR 3230

Classic Walnut Compact: 3230
Acoustic: 3235/3 (U3) 3235/4 (U4)



NCS S 2002-Y50R

WR 9803


Mercury Compact: 9803
Acoustic: 6840/3 (U3) 6840/4 (U4)



NCS S 6010-R90B

WR 9808

Lazulite Blue Compact: 9808
Acoustic: 6848/3 (U3) 6848/4 (U4)



NCS S 2005-Y20R

WR 9800


Silica Sand Compact: 9800
Acoustic: 6843/3 (U3) 6843/4 (U4)



NCS S 3010-Y20R

WR 9801


Mica Sand Compact: 9801
Acoustic: 6844/3 (U3) 6844/4 (U4)



NCS S 3010-G50Y

WR 9809

Euclase Green Compact: 9809
Acoustic: 6846/3 (U3) 6846/4 (U4)

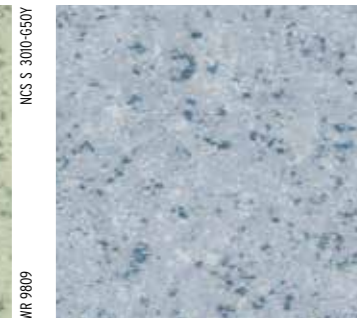

NCS S 3010-R90B

WR 9806

Celestine Blue Compact: 9806
Acoustic: 6847/3 (U3) 6847/4 (U4)



NCS S 3500-N

WR 9804

Zinc Compact: 9804
Acoustic: 6841/3 (U3) 6841/4 (U4)



NCS S 4005-Y50R

WR 9802

Earth Compact: 9802
Acoustic: 6845/3 (U3) 6845/4 (U4)



NCS S 7502-R

WR 9805

Onyx Compact: 9805
Acoustic: 6842/3 (U3) 6842/4 (U4)

KEY FEATURES

Heterogeneous commercial vinyl sheet floorcovering designed for areas which require impact noise reduction.

All acoustic colours are available with 0.5mm (U3) or 0.65mm (U4) wear layer. Selected colours are available in Compact, 2mm gauge, 0.7mm wear layer (see technical specification on page 78).

Authentically reproduced wood and granite designs, and modern abstract patterns.

Polyurethane reinforcement to facilitate a low-cost, polish-free maintenance regime.

Acoustic conforms to EN 651, Compact conforms to EN ISO 10582/EN649.



* Refer to BRE Global ratings on www.greenbooklive.com

This product is a highly realistic replication of natural materials. Hence, on many designs, features such as knots will be present, as well as natural colour variation.

SPECIFICATIONS

Acoustic wear layer 0.5mm (U3)



Acoustic wear layer 0.65mm (U4)



Compact wear layer 0.7mm (U4)




GAUGE: Acoustic 3.7mm, Compact 2mm
AVAILABILITY: Sheet: 2m x 20m



Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.

Acoustix Harmony fx PUR

HARDWEARING COMMERCIAL SHEET VINYL FLOORCOVERING PROVIDING IMPACT SOUND REDUCTION OF 19dB

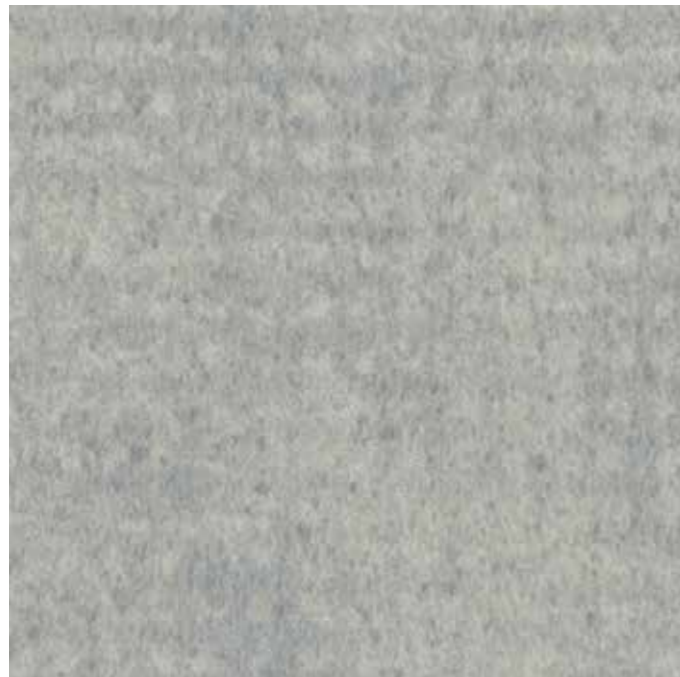

Jacinthe
Acoustic: 6302/3 (U3) 6302/4 (U4)



Crépuscule
Acoustic: 6322/3 (U3) 6322/4 (U4)



Laine
Acoustic: 6301/3 (U3) 6301/4 (U4)



Graphite
Acoustic: 6303/3 (U3) 6303/4 (U4)




Ivoire
Acoustic: 6324/3 (U3) 6324/4 (U4)



Fauve
Acoustic: 6323/3 (U3) 6323/4 (U4)




Béton Compact: 6426
Acoustic: 6326/3 (U3) 6326/4 (U4)



Ciment
Acoustic: 6325/3 (U3) 6325/4 (U4)



Beige Compact: 6416
Acoustic: 6316/3 (U3) 6316/4 (U4)



Sable Compact: 6411
Acoustic: 6311/3 (U3) 6311/4 (U4)




Taupe Compact: 6421
Acoustic: 6321/3 (U3) 6321/4 (U4)



Tonnerre Compact: 6415
Acoustic: 6315/3 (U3) 6315/4 (U4)



Soleil
Acoustic: 6317/3 (U3) 6317/4 (U4)



Argile Compact: 6419
Acoustic: 6319/3 (U3) 6319/4 (U4)



Aqua Compact: 6414
Acoustic: 6314/3 (U3) 6314/4 (U4)



Marine
Acoustic: 6313/3 (U3) 6313/4 (U4)



Etain Compact: 6420
Acoustic: 6320/3 (U3) 6320/4 (U4)




Citron Vert
Acoustic: 6312/3 (U3) 6312/4 (U4)



Cerise
Acoustic: 6318/3 (U3) 6318/4 (U4)

KEY FEATURES

- Heterogeneous commercial vinyl sheet floorcovering designed for areas which require impact noise reduction.
- All acoustic colours are available with 0.5mm (U3) or 0.65mm (U4) wear layer. Selected colours are available in Compact, 2mm gauge, 0.7mm wear layer (see technical specification on page 78).
- Authentically reproduced wood and granite designs, and modern abstract patterns.
- Polyurethane reinforcement to facilitate a low-cost, polish-free maintenance regime.
- Acoustic conforms to EN 651, Compact conforms to EN ISO 10582/EN649.



* Refer to BRE Global ratings on www.greenbooklive.com

This product is a highly realistic replication of natural materials. Hence, on many designs, features such as knots will be present, as well as natural colour variation.

SPECIFICATIONS

Acoustic wear layer 0.5mm (U3)

Acoustic wear layer 0.65mm (U4)

Compact wear layer 0.7mm (U4)

GAUGE: Acoustic 3.7mm, Compact 2mm
AVAILABILITY: Sheet: 2m x 20m



Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.



Natural Oak 2126
plank w/l: 200 x 1000mm



Alabaster Elm 2123
plank w/l: 166 x 1000mm



Aspen 2124
plank w/l: 100 x 1000mm



Norwegian Maple 2125
plank w/l: 80 x 1000mm



Blond Oak 2127
plank w/l: 200 x 1500mm



Golden Oak 2128
plank w/l: 62.5 x 500/1000mm



Antique Herringbone 2129
plank w/l: 140 x 710mm



Country Oak 2130
plank w/l: 200 x 1500mm



Antique Oak 2131
plank w/l: 200 x 1500mm



Sweet Chestnut 2132
plank w/l: 100 x 1000mm




Black Walnut 2133
plank w/l: 100 x 420/580mm




African Mahogany 2134
plank w/l: 62.5 x 500/1000mm




Ebony 2135
plank w/l: 100/150 x 1000mm



Yorkstone 2110
tile w/l: 333 x 500mm



Limestone 2111
tile w/l: 333 x 500mm



Peakmoor Sandstone 2112
tile w/l: 235 x 235mm



Farmhouse Terracotta 2113
tile w/l: 165 x 165mm



Black Slate 2114
tile w/l: 333 x 500mm



Riviera Sands 2115



Riviera Taupe 2116



Riviera Bluebell 2117



Polished Concrete 2118




Grey Flagstone 2119
tile w/l: 375 x 400mm



Linear Ivory 2120



Linear Fawn 2121



Linear Charcoal 2122

KEY FEATURES

Heterogeneous Luxury Vinyl Sheet Flooring for light commercial and domestic applications.

Authentically reproduced wood and stone designs, and modern abstract patterns.

Polyurethane reinforcement to facilitate a low-cost, polish-free maintenance regime.


Conforms to EN 653 / EN ISO 26986.



† Refer to BRE Global ratings on www.thegreenguide.org.uk

SPECIFICATIONS

The **R** values shown denote a ramp test result, which is an ex-factory measure of slip resistance. For safety flooring with sustainable wet slip resistance, refer to Expona Control PUR or the Polysafe ranges.



GAUGE: 3.0mm, wear layer 0.35mm
AVAILABILITY: Sheet: 2m x 25m
3m x 25m
4m x 25m

This product is a highly realistic replication of natural materials. Hence, on many designs, features such as knots will be present, as well as natural colour variation.



Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.

NEW Designatex PUR

HARDWEARING TEXTILE BACKED LUXURY VINYL SHEET



WOOD



Chalk White Oak 2141
plank w/l: 200 x 1500mm



Honey Limed Ash 2143
plank w/l: 166 x 1500mm



California Oak 2145
plank w/l: 166 x 1500mm



Cornish Oak 2146
plank w/l: 166 x 1500mm

English Oak Parquet 2137
plank w/l: 76.2 x 228.6mm



Sicilian Oak 2147
plank w/l: 166 x 1500mm



Columned Ash 2140
plank w/l: 500 x 40-120mm



Laurel Oak Parquet 2136
plank w/l: 76.2 x 228.6mm



Rich Oak Parquet 2138
plank w/l: 76.2 x 228.6mm



Smokehouse Herringbone 2139
plank w/l: 140 x 710mm



Platinum Oak 2142
plank w/l: 166 x 1500mm



Nero Oak 2144
plank w/l: 125 x 1000mm

KEY FEATURES

Heterogeneous Luxury Vinyl Sheet Flooring for light commercial and domestic applications.

Authentically reproduced wood and stone designs.

Polyurethane reinforcement to facilitate a low-cost, polish-free maintenance regime.

Conforms to EN 653 / EN ISO 26986.



† Refer to BRE Global ratings on www.thegreenguide.org.uk

STONE



Barça Limestone 2150
tile w/l: 500-800 x 143mm



Manhattan Limestone 2151
tile w/l: 500-800 x 143mm



Cottage Paving 2148
tile w/l: 166 x 166-333 x 500mm



Quarried Slate 2152
tile w/l: 500-1000 x 35-135mm



Tuscan Paving 2149
tile w/l: 166 x 166-333 x 500mm



Noir Slate 2153
tile w/l: 500-1000 x 35-135mm

SPECIFICATIONS

The **R10** values shown denote a ramp test result, which is an ex-factory measure of slip resistance. For safety flooring with sustainable wet slip resistance, refer to Expona Control PUR or the Polysafe ranges.



GAUGE: 3.0mm, wear layer 0.3mm
AVAILABILITY: Sheet: 2m x 25m
3m x 25m
4m x 25m



This product is a highly realistic replication of natural materials. Hence, on many designs, features such as knots will be present, as well as natural colour variation.

Expona Flow PUR

HARDWEARING COMMERCIAL SHEET VINYL FLOORCOVERING, INCLUDING STYLISH WOOD AND EFFECT DESIGNS




WOOD



KEY FEATURES

- Heterogeneous commercial vinyl sheet floorcovering.
- Authentic wood and contemporary effect designs, in a choice of 50 shades.
- Polyurethane reinforcement, to facilitate a low-cost, polish-free maintenance regime.
- Conforms to EN 649 / EN ISO 10582.



* Refer to BRE Global ratings on www.greenbooklive.com

INFINITY



The R values shown denote a ramp test result, which is an ex-factory measure of slip resistance. For safety flooring with sustainable wet slip resistance, refer to Expona Control PUR or the Polysafe ranges.

SPECIFICATIONS



GAUGE: 2.0mm, wear layer 0.7mm
AVAILABILITY: Sheet: 2m x 20m

This product is a highly realistic replication of natural materials. Hence, on many designs, features such as knots will be present, as well as natural colour variation.



Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.

Expona Flow PUR


HARDWEARING COMMERCIAL SHEET VINYL FLOORCOVERING, INCLUDING STYLISH WOOD AND EFFECT DESIGNS



COSMOS




CONCRETE

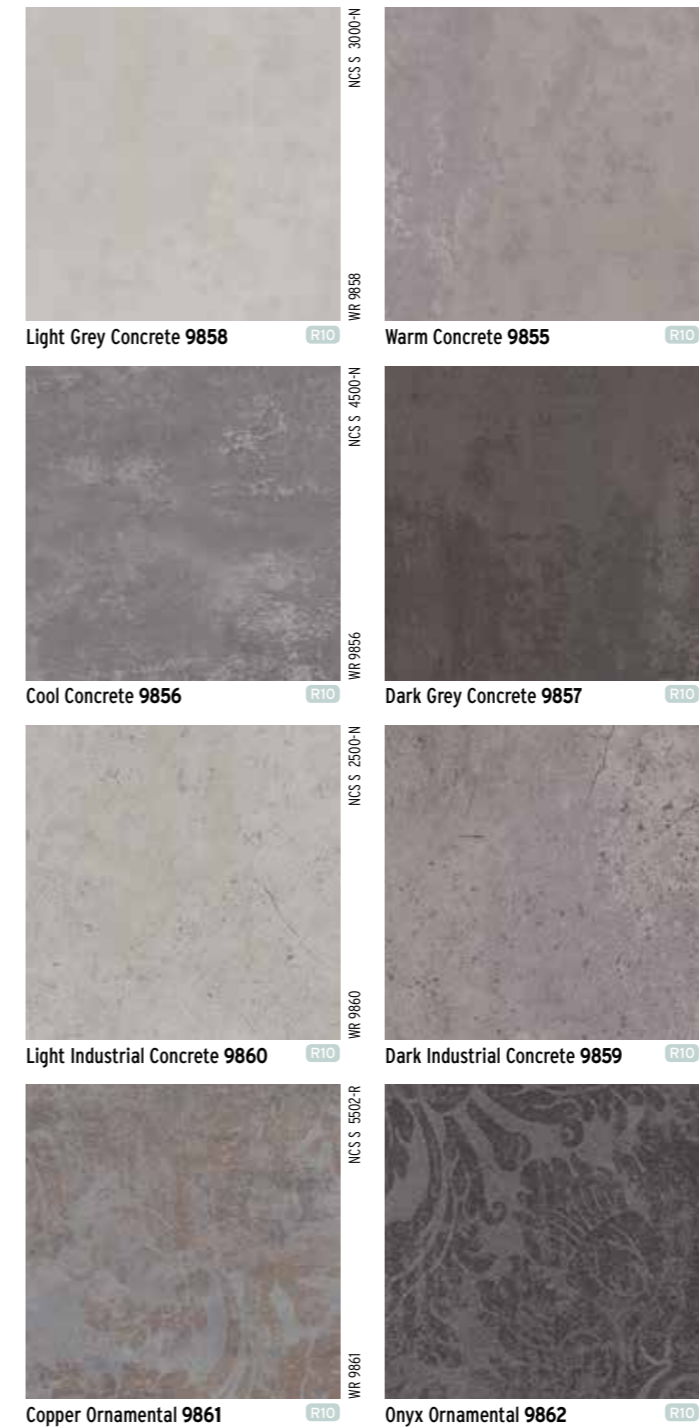

KEY FEATURES

- Heterogeneous commercial vinyl sheet floorcovering.
- Authentic wood and contemporary effect designs, in a choice of 50 shades.
- Polyurethane reinforcement, to facilitate a low-cost, polish-free maintenance regime.
- Conforms to EN 649 / EN ISO 10582.



* Refer to BRE Global ratings on www.greenbooklive.com

SPECIFICATIONS

The R10 values shown denote a ramp test result, which is an ex-factory measure of slip resistance. For safety flooring with sustainable wet slip resistance, refer to Expona Control PUR or the Polysafe ranges.



GAUGE: 2.0mm, wear layer 0.7mm
AVAILABILITY: Sheet: 2m x 20m

This product is a highly realistic replication of natural materials. Hence, on many designs, natural variations in texture and colour will be present.



Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.

Expona Commercial PUR

ELEGANT WOOD COLLECTION FOR HEAVY COMMERCIAL APPLICATIONS



KEY FEATURES

Luxury vinyl tile range featuring traditional, rustic and contemporary designs. Sophisticated and extensive collection with realistic emboss finishes. Polyurethane reinforcement provides an excellent foundation for an ongoing cleaning regime, leading to maintenance cost savings. Indoor Air Comfort GOLD - Eurofins certified product. Conforms to EN 649 / EN ISO 10582.



* Refer to BRE Global ratings on www.greenbooklive.com



4067 and 4068 feature mixed plank sizes: 76 x 914, 101 x 914, 152 x 914mm

The **R** values shown denote a ramp test result, which is an ex-factory measure of slip resistance. For safety flooring with sustainable wet slip resistance, refer to Expona Control PUR or the Polysafe ranges.

These items feature a bevelled edge.

SPECIFICATIONS



GAUGE: 2.5mm, wear layer 0.55mm
AVAILABILITY: Plank: sizes as shown

This product is a highly realistic replication of natural materials. Hence, on many designs, features such as knots will be present, as well as natural colour variation.



Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.

Expona Commercial PUR

AUTHENTIC STONE AND EFFECTS COLLECTION FOR HEAVY COMMERCIAL APPLICATIONS



Crème Swirl 5048
457 x 457mm



Beige Travertine 5061
305 x 610mm



Classic Yorkstone 1992
457 x 457mm



Light Grey Travertine 5062
305 x 610mm



Exposed Concrete 5028
457 x 457mm




Green Swirl 5047
457 x 457mm



Birch Trunk 4077
305 x 914mm




Dark Grey Travertine 5063
305 x 610mm



Cambrian Stone 1993
457 x 457mm



Grey Plywood 4075
305 x 914mm



Brown Plywood 4076
305 x 914mm



Silver Slate 1921
457 x 457mm



Light Grey Concrete 5067
610 x 610mm



Cool Grey Concrete 5068
610 x 610mm



Warm Grey Concrete 5064
610 x 610mm



Dark Grey Concrete 5069
610 x 610mm



Beige Brazilian Slate 5041
610 x 610mm



White Brazilian Slate 5042
610 x 610mm



Gold Brazilian Slate 5043
610 x 610mm



Taupe Brazilian Slate 5044
610 x 610mm



Crème Matrix 5076
610 x 610mm



Light Grey Matrix 5074
610 x 610mm



Mocca Matrix 5075
610 x 610mm



Black Matrix 5071
610 x 610mm



Nature Texture 5078
610 x 610mm



Black Texture 5077
610 x 610mm

KEY FEATURES

Luxury vinyl tile range featuring traditional, rustic and contemporary designs.

Sophisticated and extensive collection with realistic emboss finishes.

Polyurethane reinforcement provides an excellent foundation for an ongoing cleaning regime, leading to maintenance cost savings.

Indoor Air Comfort GOLD - Eurofins certified product.

Conforms to EN 649 / EN ISO 10582.



* Refer to BRE Global ratings on www.greenbooklive.com

SPECIFICATIONS

The **R** values shown denote a ramp test result, which is an ex-factory measure of slip resistance. For safety flooring with sustainable wet slip resistance, refer to Expona Control PUR or the Polysafe ranges.



GAUGE: 2.5mm, wear layer 0.55mm
AVAILABILITY: Tile: sizes as shown



This product is a highly realistic replication of natural materials. Hence, on many designs, features such as knots will be present, as well as natural colour variation.

Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.


Expona Design PUR

ELEGANT WOOD AND AUTHENTIC STONE AND EFFECTS COLLECTION FOR VERY HEAVY COMMERCIAL APPLICATIONS



KEY FEATURES

- Luxury vinyl tile range featuring traditional, rustic and contemporary designs.
- Sophisticated and extensive collection with realistic emboss finishes.
- Polyurethane reinforcement provides an excellent foundation for an ongoing cleaning regime, leading to maintenance cost savings.
- Indoor Air Comfort GOLD - Eurofins certified product.
- Conforms to EN 649 / EN ISO 10582.



† Refer to BRE Global ratings on www.thegreenguide.org.uk



The R values shown denote a ramp test result, which is an ex-factory measure of slip resistance. For safety flooring with sustainable wet slip resistance, refer to Expona Control PUR or the Polysafe ranges.

These items feature a bevelled edge.

SPECIFICATIONS



GAUGE: 3.0mm, wear layer 0.7mm
AVAILABILITY: Tile & Plank: sizes as shown



This product is a highly realistic replication of natural materials. Hence, on many designs, natural variations in texture and colour will be present.

Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.

Expona Control PUR

LUXURY VINYL TILES WITH SUSTAINABLE WET SLIP RESISTANCE



American Oak 6500
152 x 914mm



White Oak 6505
152 x 914mm



Blond Country Plank 6501
152 x 914mm



Light Elm 6506
152 x 914mm




Nut Tree 6502
152 x 914mm



Weathered Country Plank 6504
152 x 914mm



Classic Oak 6503
152 x 914mm



Portland Stone 7500
457 x 457mm




Classic Yorkstone 7502
457 x 457mm



Classic Limestone 7501
457 x 457mm



Cambrian Stone 7507
305 x 610mm



Smoked Limestone 7503
457 x 457mm



Warm Grey Concrete 7504
457 x 457mm



Roman Limestone 7506
305 x 610mm

KEY FEATURES

- The first EN 13845 sustainable slip resistant LVT in the World.
- Featuring a polyurethane reinforcement to assist ongoing maintenance, offering cost saving of up to 60%.
- Incorporates aluminium oxide particles to improve traction and safety underfoot.
- Slip resistance is assured for the guaranteed life of the product.
- ≥36 (Pendulum wet test - 4S Rubber/Slider 96).
- Conforms to EN 13845 50,000 cycles abrasion test.



† Refer to BRE Global ratings on www.thegreenguide.org.uk

SPECIFICATIONS



GAUGE: 2.5mm, wear layer 0.7mm
AVAILABILITY: Tile & Plank: sizes as shown



Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.

NEW Expona SimpLay PUR

LOOSE LAY VINYL FLOOR TILES AND PLANKS



WOOD

	
Blond Country Oak 2507 177.8 x 1219.2mm	American Oak 2503 177.8 x 1219.2mm
	
White Rustic Pine 2513 177.8 x 1219.2mm	Grey Country Oak 2506 177.8 x 1219.2mm
	
Grey Ash 2512 177.8 x 1219.2mm	Grey Rustic Oak 2516 177.8 x 1219.2mm
	
Light Grey Finline 2509 177.8 x 1219.2mm	Dark Grey Finline 2510 177.8 x 1219.2mm

			
Medium Classic Oak 2521 185 x 1505mm	Natural Oak 2502 177.8 x 1219.2mm	Natural Rustic Oak 2517 177.8 x 1219.2mm	Natural Ash 2511 177.8 x 1219.2mm
			
Light Classic Oak 2520 185 x 1505mm	Light Cherry 2501 177.8 x 1219.2mm	Golden Rustic Oak 2508 177.8 x 1219.2mm	Rich Oak 2500 177.8 x 1219.2mm
			
Natural Rustic Pine 2514 177.8 x 1219.2mm	Brown Mystique Wood 2519 185 x 1505mm	Brown Rustic Oak 2515 177.8 x 1219.2mm	Rich Walnut 2504 177.8 x 1219.2mm
			
Grey Mystique Wood 2518 185 x 1505mm	Dark Country Oak 2505 177.8 x 1219.2mm		


KEY FEATURES

- A collection of heavy commercial loose lay tiles and planks designed to reduce installation time.
- Authentic replications of wood, stone and abstract effects.
- Polyurethane reinforcement provides an excellent foundation for an ongoing cleaning regime, leading to maintenance cost savings.
- Conforms to EN 649 / EN ISO 10582.



SPECIFICATIONS

The R values shown denote a ramp test result, which is an ex-factory measure of slip resistance. For safety flooring with sustainable wet slip resistance, refer to Expona Control PUR or the Polysafe ranges.

 These items feature a bevelled edge.



GAUGE: 5.0mm, wear layer 0.7mm
AVAILABILITY: Plank: sizes as shown

This product is a highly realistic replication of natural materials. Hence, on many designs, natural variations in texture and colour will be present.



Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.





NEW Expona SimpLay PUR

LOOSE LAY VINYL FLOOR TILES AND PLANKS







STONE

	
Champagne Limestone 2542 457.2 x 457.2mm	Limed Concrete 2540 457.2 x 457.2mm
	
Grey Sandstone 2561 457.2 x 457.2mm	Light Grey Concrete 2567 600 x 600mm
	
Warm Grey Concrete 2568 600 x 600mm	Cold Grey Concrete 2566 600 x 600mm
	
Dark Grey Concrete 2569 600 x 600mm	Black Concrete 2541 457.2 x 457.2mm

	
Jerusalem Limestone 2543 457.2 x 457.2mm	Cathedral Limestone 2544 457.2 x 457.2mm
	
Ground Limestone 2545 457.2 x 457.2mm	Slate 2560 457.2 x 457.2mm



EFFECT

	
Porcelain Weave 2546 457.2 x 457.2mm	Charcoal Weave 2547 457.2 x 457.2mm
	
Brown Leather 2564 457.2 x 457.2mm	Dark Grey Leather 2565 457.2 x 457.2mm

KEY FEATURES

A collection of heavy commercial loose lay tiles and planks designed to reduce installation time.


Authentic replications of wood, stone and abstract effects.

Polyurethane reinforcement provides an excellent foundation for an ongoing cleaning regime, leading to maintenance cost savings.

Conforms to EN 649 / EN ISO 10582.



The R values shown denote a ramp test result, which is an ex-factory measure of slip resistance. For safety flooring with sustainable wet slip resistance, refer to Expona Control PUR or the Polysafe ranges.

 These items feature a bevelled edge.

SPECIFICATIONS



GAUGE: 5.0mm, wear layer 0.7mm
AVAILABILITY: Tile: sizes as shown

This product is a highly realistic replication of natural materials. Hence, on many designs, natural variations in texture and colour will be present.



Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.

Bevel Line PUR

COLLECTION OF BEVELLED WOOD AND STONE DESIGNS DEVELOPED FOR VERY HEAVY COMMERCIAL PROJECTS



WOOD



Grey Ash 1998
101 x 914mm



Smoked Chestnut 1999
101 x 914mm



Maple 1972
101 x 914mm



Beech 1973
101 x 914mm



American Oak 1974
101 x 914mm



Light Oak 1971
101 x 914mm



Rich Oak 1975
101 x 914mm



French Nut Tree 1976
101 x 914mm



Merbau 1977
101 x 914mm



Mahogany 1978
101 x 914mm


KEY FEATURES

Luxury vinyl tile range featuring authentic and popular wood and stone designs.

Polyurethane reinforcement provides an excellent foundation for an ongoing cleaning regime, leading to maintenance cost savings.

Indoor Air Comfort GOLD - Eurofins certified product.

Conforms to EN 649 / EN ISO 10582.



* Refer to BRE Global ratings on www.greenbooklive.com


STONE




Sandstone 1984
457 x 457mm




Smoked Limestone 1985
457 x 457mm




Ivory Stone 1980
457 x 457mm




Portland Stone 1981
457 x 457mm




Shellstone 1982
457 x 457mm



Limestone 1983
457 x 457mm




Brushed Concrete 1986
457 x 457mm



Wet Concrete 1987
457 x 457mm



Burnt Sandstone 1988
457 x 457mm



Black Limestone 1989
457 x 457mm

SPECIFICATIONS

The R values shown denote a ramp test result, which is an ex-factory measure of slip resistance. For safety flooring with sustainable wet slip resistance, refer to Expona Control PUR or the Polysafe ranges.

These items feature a bevelled edge.



GAUGE: 2.5mm, wear layer 0.7mm
AVAILABILITY: Tile & Plank: sizes as shown



This product is a highly realistic replication of natural materials. Hence, on many designs, natural variations in texture and colour will be present.

Camaro PUR

A COLLECTION OF HIGH-DESIGN WOOD EFFECT PLANKS AND REALISTIC STONE, SLATE AND MARBLE DESIGNS TILES FOR LIGHT COMMERCIAL AND RESIDENTIAL APPLICATIONS




WOOD



KEY FEATURES

Luxury vinyl plank and tile collection featuring creative and authentic wood and stone designs. Accurate timber variation, grain and knots are sympathetically represented. Polyurethane reinforcement provides an excellent foundation for an ongoing cleaning regime, leading to maintenance cost savings. Indoor Air Comfort GOLD - Eurofins certified product. Conforms to EN 649/EN ISO 10582.



* Refer to BRE Global ratings on www.greenbooklive.com

STONE



The R values shown denote a ramp test result, which is an ex-factory measure of slip resistance. For safety flooring with sustainable wet slip resistance, refer to Expona Control PUR or the Polysafe ranges.

SPECIFICATIONS



GAUGE: 2.0mm, wear layer 0.3mm
AVAILABILITY: Tile & Plank: sizes as shown




This product is a highly realistic replication of natural materials. Hence, on many designs, natural variations in texture and colour will be present.

Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.


Camaro Loc PU

A COLLECTION OF HIGH-DESIGN WOOD EFFECT PLANKS AND REALISTIC STONE TILES, FOR LIGHT COMMERCIAL AND RESIDENTIAL APPLICATIONS

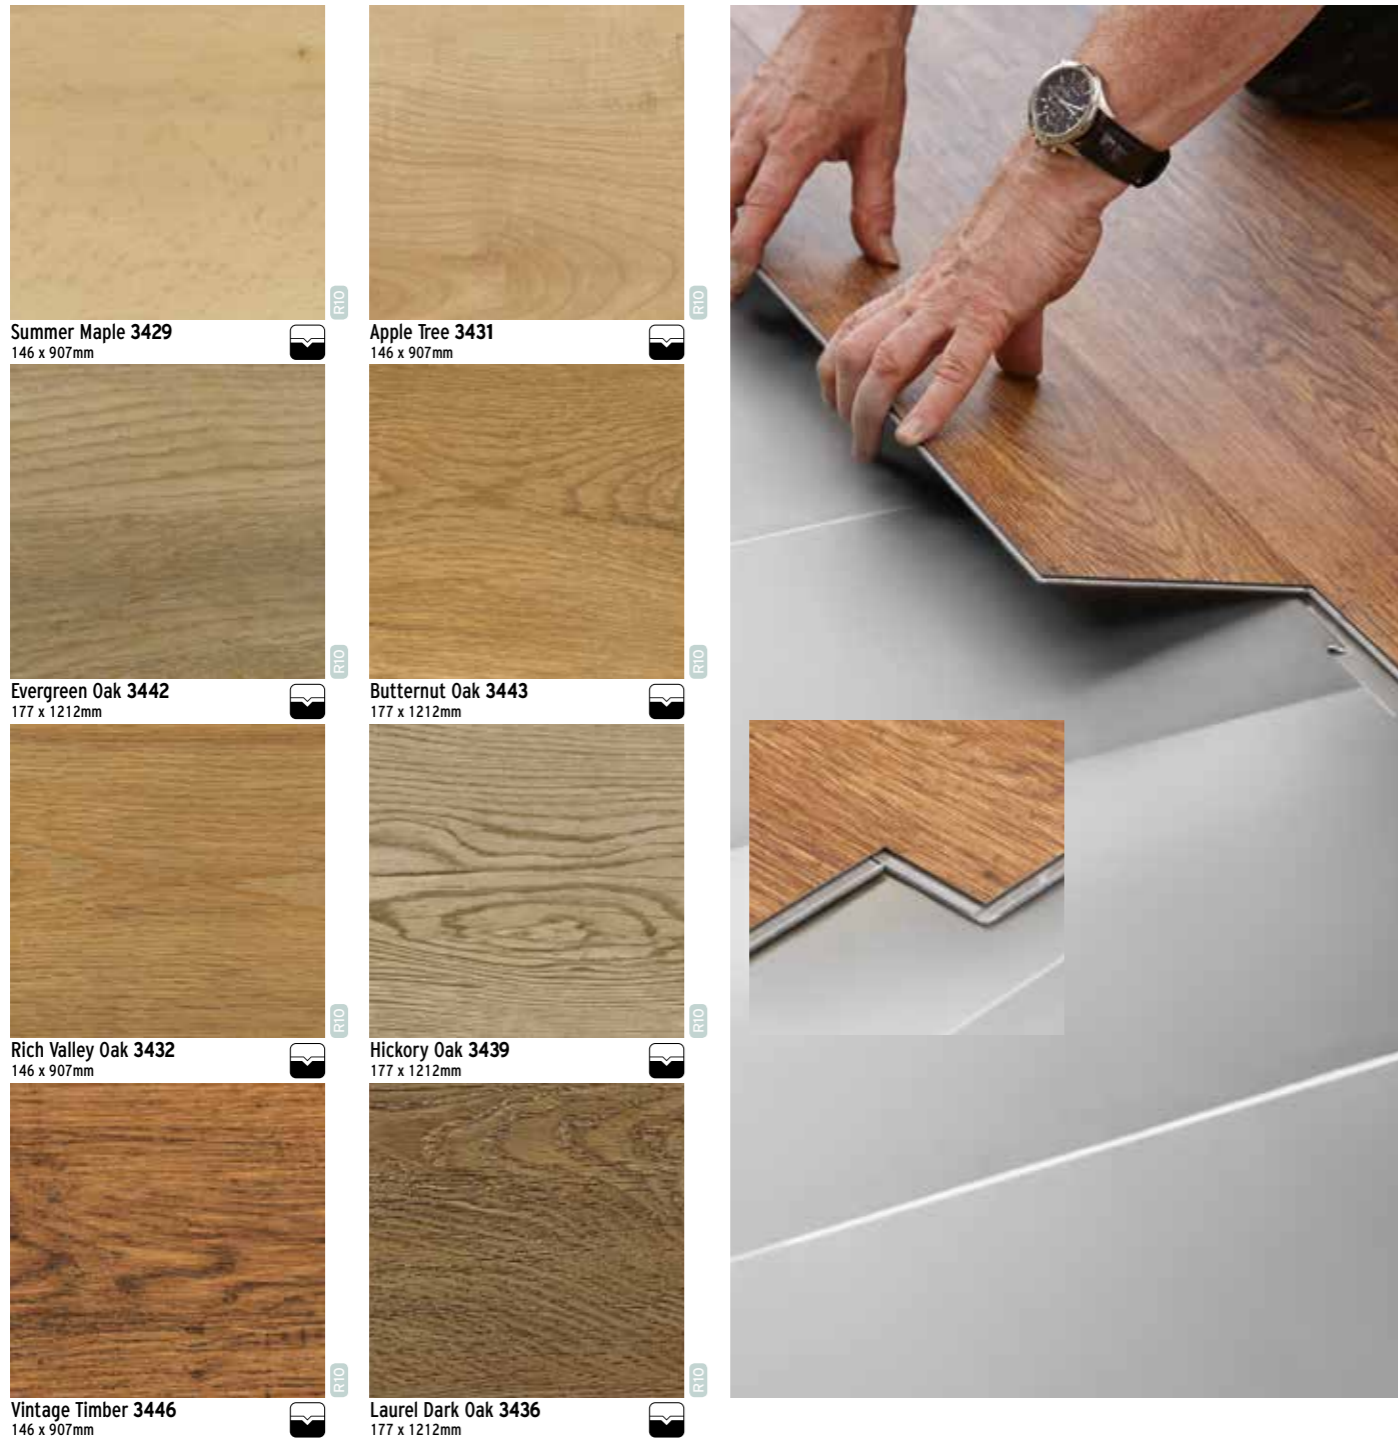

KEY FEATURES

- Luxury Interlocking Vinyl plank and tile flooring, featuring authentically replicated wood and stone designs.
- Accurate timber variation with grain and knots represented in each wood design.
- Polyurethane surface treatment provides an excellent foundation for an ongoing cleaning regime, leading to maintenance cost savings.
- Vinyl Loc Underlay is recommended when installing.
- Indoor Air Comfort Gold - Eurofins certified product.
- Conforms to EN 649 / EN ISO 10582.



† Refer to BRE Global ratings on www.thegreenguide.org.uk



SPECIFICATIONS

The R values shown denote a ramp test result, which is an ex-factory measure of slip resistance. For safety flooring with sustainable wet slip resistance, refer to Expona Control PUR or the Polysafe ranges.

These items feature a bevelled edge.



GAUGE: 4.0mm, wear layer 0.3mm
AVAILABILITY: Tile and Plank: sizes as shown



This product is a highly realistic replication of natural materials. Hence, on many designs, natural variations in texture and colour will be present.

Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.

NEW Affinity2⁵⁵ PUR

A COLLECTION OF HIGH DESIGN LUXURY VINYL TILES DEVELOPED FOR HEAVY TRAFFIC ENVIRONMENTS



Aspen Pine 9870
184.2 x 1219.2mm



Cracked White Oak 9871
184.2 x 1219.2mm



Planed White Oak 9872
184.2 x 1219.2mm



French Limed Oak 9873
184.2 x 1219.2mm



Reclaimed Pine 9883
184.2 x 1219.2mm



Dappled Oak 9875
184.2 x 1219.2mm



Seasoned Grey Oak 9884
184.2 x 1219.2mm



Jet Black Ash 9885
184.2 x 1219.2mm



Champagne Oak 9874
184.2 x 1219.2mm



Harvest Oak 9876
184.2 x 1219.2mm



Saw Mill Oak 9877
184.2 x 1219.2mm



Cross Sawn Timber 9878
184.2 x 1219.2mm



Hazel Oak 9879
184.2 x 1219.2mm



Flamed Chestnut 9881
184.2 x 1219.2mm



Smoked Walnut 9880
184.2 x 1219.2mm



Huckleberry Oak 9882
184.2 x 1219.2mm




KEY FEATURES

A collection of heavy commercial wood effect luxury vinyl tiles.

The innovative 2mm gauge allows Affinity2⁵⁵ to be installed alongside vinyl sheet flooring.

Polyurethane reinforcement provides an excellent foundation for an ongoing cleaning regime, leading to maintenance cost savings.

Conforms to EN 649/EN ISO 10582.



* Refer to BRE Global ratings on www.greenbooklive.com

SPECIFICATIONS

The R values shown denote a ramp test result, which is an ex-factory measure of slip resistance. For safety flooring with sustainable wet slip resistance, refer to Expona Control PUR or the Polysafe ranges.



GAUGE: 2.0mm, wear layer 0.55mm
AVAILABILITY: Plank: size as shown

This product is a highly realistic replication of natural materials. Hence, on many designs, natural variations in texture and colour will be present.



Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.

Colonia PUR

COLLECTION OF AUTHENTIC WOOD AND STONE DESIGNS FOR RESIDENTIAL APPLICATIONS



WOOD



English Oak 4435
152 x 1219mm



Nordic White Oak 4436
184 x 1219mm



New England Elm 4433
152 x 1219mm



Schoolhouse Oak 4434
152 x 1219mm



Oxford Maple 4431
152 x 914mm



Golden Koa 4403
101 x 914mm



Mountain Alder 4401
101 x 914mm



Woodland Oak 4411
101 x 914mm



Virginia Walnut 4432
152 x 914mm



Kings Oak 4437
184 x 1219mm

STONE



Welsh Raven Slate 4535
305 x 610mm



Natural Limestone 4536
457 x 457mm



Fossil Limestone 4537
457 x 457mm



Cottage Yorkstone 4531
305 x 305mm



Balmoral Grey Slate 4534
305 x 610mm



Glazed Metalstone 4533
305 x 610mm



Quarried Millstone 4532
305 x 305mm

The R values shown denote a ramp test result, which is an ex-factory measure of slip resistance. For safety flooring with sustainable wet slip resistance, refer to Expona Control PUR or the Polysafe ranges.

KEY FEATURES

Collection of luxury vinyl tiles inspired by natural wood and stone materials. Shades and textures can be combined to create stunning floor designs. Polyurethane reinforcement provides an excellent foundation for an ongoing cleaning regime, leading to maintenance cost savings. Indoor Air Comfort GOLD - Eurofins certified product. Conforms to EN 649/EN ISO 10582.



* Refer to BRE Global ratings on www.greenbooklive.com



SPECIFICATIONS



GAUGE: 2.0mm, wear layer 0.2mm
AVAILABILITY: Tile & Plank: sizes as shown

This product is a highly realistic replication of natural materials. Hence, on certain designs, natural variations in texture and colour, as well as markings such as knots, may be present.

SD Collection

HARDWEARING VINYL FLOORCOVERINGS ENGINEERED FOR ELECTROSTATIC DISCHARGE PROTECTION



Polyflor SD




Ocean Blue 5050




Golden Sand 5070




Flaxen 5060

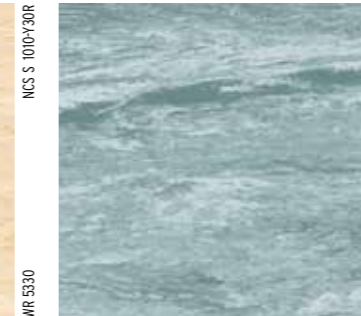

Teal 5080

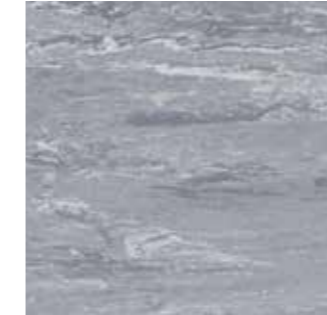


Steel Grey 5030

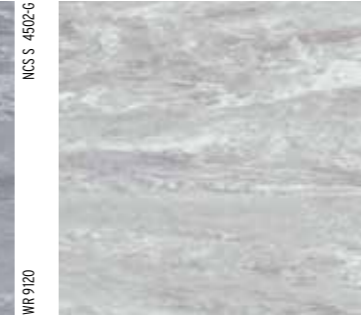

Silver Grey 5110


Finesse SD

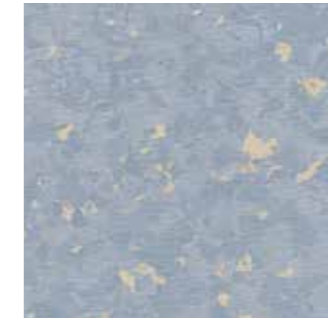


Cascade 5800




Woodglade 5840

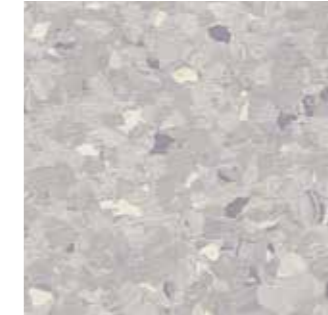

Daybreak 5820

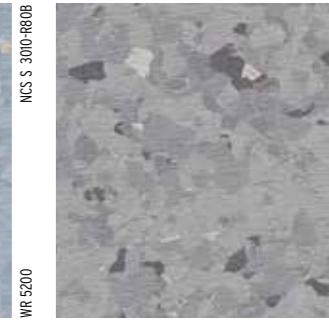

Lodestone 5830

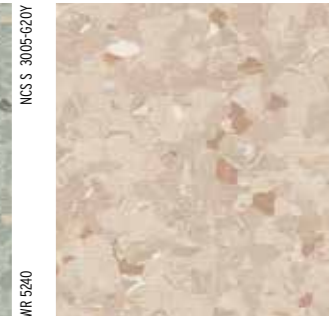


Moonscape 5860



KEY FEATURES

High-performance, homogeneous floorcoverings with static dissipative properties. Choice of marbled or non-directional decoration. Conforms to a broad range of ESD standards. Conforms to EN 649 / EN ISO 10581.



Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.

SPECIFICATIONS



GAUGE: 2.0mm
AVAILABILITY: Sheet: 2m x 20m
Tile: 608 x 608mm




EC Collection


HARDWEARING VINYL FLOORCOVERINGS ENGINEERED FOR ELECTROSTATIC DISCHARGE PROTECTION




OHmega EC

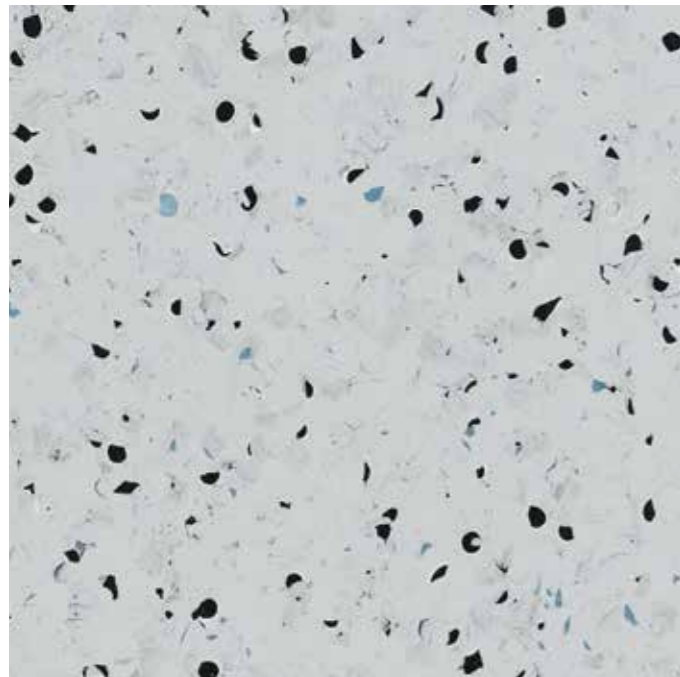


Morning Dew 6006

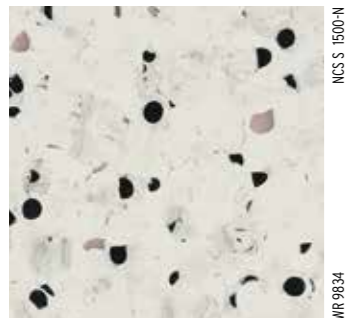


Frosty Glen 6005

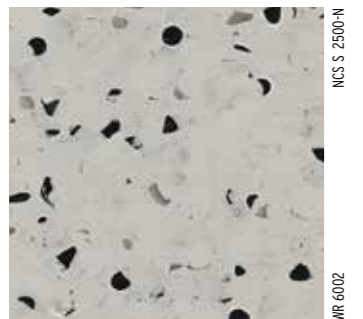

Thunderstorm 6002

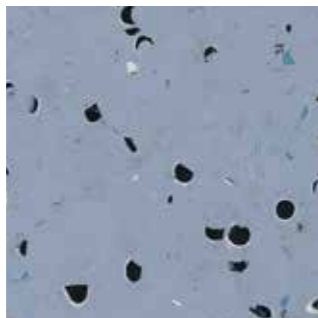

Tempest 6004

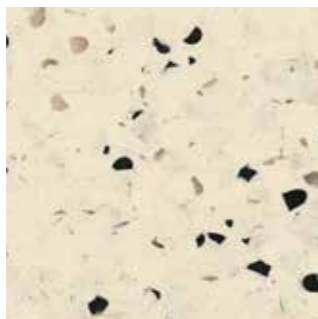

Warm Haze 6003

Polyflor EC



Black/Grey 8990

Conductive ROF*



Black 5980


KEY FEATURES

High-performance, homogeneous floorcoverings with electrostatic conductive properties.

Conforms to a broad range of ESD standards.

Conforms to EN 649 / EN ISO 10581.

* ROF option is intended for explosive handling areas. It does not offer protection from a short circuit on a 240/250 volt mains, so installation and switching in these rooms are critical and must be considered, prior to any handover.



† Refer to BRE Global ratings on www.thegreenguide.org.uk

SPECIFICATIONS



GAUGE: 2.0mm

AVAILABILITY: Sheet: 2m x 20m

Tile: 608 x 608mm

* ROF - Available in sheet only




Polyclad Pro and Plus PU


TOUGH, DURABLE AND FLEXIBLE VINYL WALL AND CEILING CLADDING FEATURING THE PROTECTION OF A POLYURETHANE SURFACE TREATMENT



Polyclad Pro PU

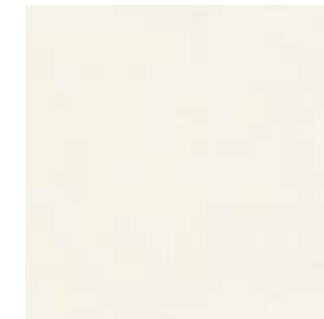

White Chalk 4093

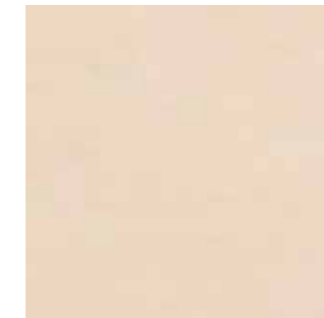


Biscuit Beige 4092




Grey Steel 4095



Frosted Grey 4094

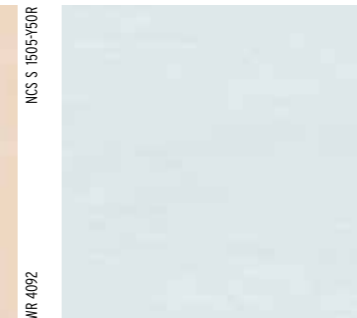

Blue Shingle 4097

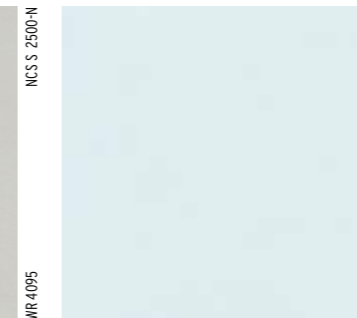

Dusted Blue 4096

Polyclad Plus PU



Summer Sky 2830



Frosted Cream 2800



Polar Ice 2840



Spring Fern 2810



Nimbus Grey 2710



Dove White 2700

* For a floor to wall solution, consider the combination of Polyclad Pro with complementary Polysafe Hydro Evolve colours. See page 23.


KEY FEATURES

Wall and ceiling cladding sheet featuring a subtle marbled decoration.

Polyurethane surface treatment provides benefits in terms of hygiene and ease of maintenance.

Designed to be welded to Polyflor floorcoverings, to provide a floor-to-wall surface that provides an excellent barrier to dirt and infection.

Ideal for wet and hygiene-critical areas.



Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.



SPECIFICATIONS

GAUGE: Polyclad Pro PU 1.25mm
Polyclad Plus PU 2.0mm

AVAILABILITY: Sheet: 1.83 x 30m (1.25mm)
2m x 20m (2.0mm)

Polyflor Sport

HARDWEARING VINYL SPORTSFLOOR DESIGNED FOR USE IN 'MULTI-PURPOSE' INDOOR SPORTS ARENAS




Maple 7516
plank w/l: 100 x 1000mm



Green 7515



Blue 7512

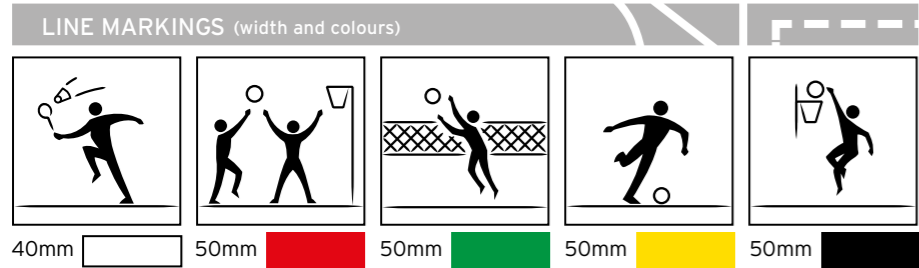

KEY FEATURES

High performance vinyl sheet sports flooring conforming to EN 14904.

Designed to perform safely and effectively in 'multi-purpose' indoor sports venues.

Suitable for basketball, netball, volleyball, gymnastics, badminton, handball, indoor football, martial arts and others.



Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.



SPECIFICATIONS

GAUGE: 6.7mm
AVAILABILITY: Sheet: 2m x 18.5m

Diamant


COMMERCIAL RUBBER SHEET FLOORING



Almond 206




Cotton 313

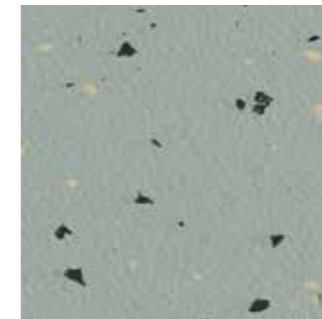

Sea Salt 213




Lentil 408

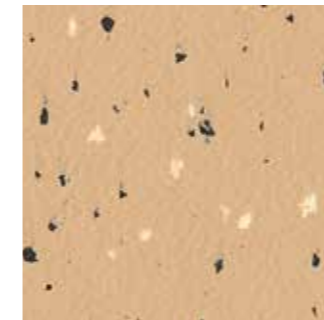

Pepper 306




Rice 203

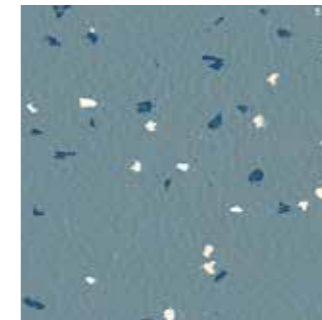


Blue Poppy 702



Water Melon 413

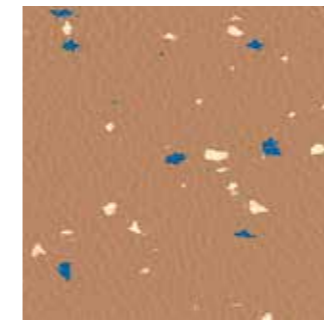


Raisin 307

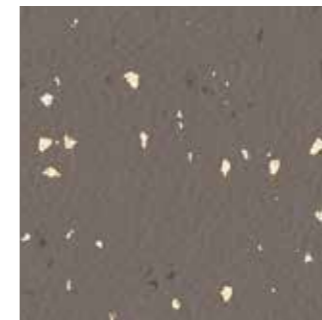

Mocha 205




Water Lily 707



Apricot 607




Mustard 503



Molasses 210



Blue Vervain 713



Tomato 611

KEY FEATURES

Hardwearing rubber sheet floorcovering designed for heavy traffic commercial areas.

Multi-coloured chip decoration with embossed surface finish.

Inherent sound deadening properties and cigarette burn resistance.

Conforms to EN 1817.



† Refer to BRE Global ratings on www.thegreenguide.org.uk



SPECIFICATIONS



GAUGE: 2.0mm
AVAILABILITY: Sheet: 1.9m x 15m

Noppe Stud Tile

COMMERCIAL RUBBER STUD TILE



Group 1



Steel 014*

NCS S 5502-G



Limestone Green 013*

NCS S 5010-B70G



Green Baize 015

NCS S 6030-G10Y



Deep Blue 191*

NCS S 7020-B



Anthracite 102*

NCS S 8000-N



Black Coal 101*

NCS S 8502-R

Group 2



Sandstone 140

NCS S 3020-Y20R



Orange 010

NCS S 2070-Y50R



Warm Red 012

NCS S 2070-Y90R



Mercury 129

NCS S 3005-B80G



Cool Blue 707*

NCS S 5020-B



Cobalt 019

NCS S 7020-B80B


Ejecta

ACCESSORIES DESIGNED FOR USE WITH POLYFLOR VINYL FLOORCOVERINGS



White 9520

NCS S 0502-Y50R



Light Fawn 9590

NCS S 2005-Y40R



Light Beige 9610

NCS S 2010-Y40R



Fawn 9580

NCS S 3005-Y50R



Light Grey 9550

NCS S 2502-B



Beige 9600

NCS S 3020-Y40R



Cream 9630

NCS S 2020-Y10R



Green 9640

NCS S 5010-G70Y



Grey 9540

NCS S 4502-G



Russet 9620

NCS S 4030-Y70R



Brown 9560

NCS S 5020-Y20R



Blue 9650

NCS S 3020-B



Dark Grey 9530

NCS S 5005-R80B



Dark Brown 9570

NCS S 7010-Y90R



Black 9510


NCS S 8000-N



KEY FEATURES

- Hard wearing commercial rubber floor tile.
- Low-profile studded surface.
- Conforms to EN 12199.
- Resistant to cigarette burns.

SPECIFICATIONS



GAUGE: 3.0mm, 4.0mm
AVAILABILITY: Tile: 500 x 500mm


All shades are available in 3.0mm.
*Also available in 4.0mm



† Refer to BRE Global ratings on www.thegreenguide.org.uk

PRODUCT	CODE	GAUGE/SIZE	UNIT LENGTH	STANDARD PACK	EX-STOCK COLOURS
SIT-ON COVING	MC8	20 x 100 mm	2 m	20 x 2 m	15 colours
	MC14	20 x 75 mm	2 m	20 x 2 m	15 colours
SET-IN COVING	MC18	50 x 100 mm	2 m	20 x 2 m	15 colours
	MC8c SIT-ON	20 x 100 mm	20 m	2 x 20 m coil*	15 colours
COILED SKIRTING	MC18c SET-IN	50 x 100 mm	20 m	2 x 20 m coil*	15 colours
	COVE FORMER	CF 20mm	20 x 20 mm	2 m	30 x 2 m
CF 38mm		38 x 38 mm	2 m	15 x 2 m	Black only
CAPPING STRIP	CS-N	40 mm	2 m	40 x 2 m	15 colours
	CS-NC	40 mm	20 m coil	20 m coil*	15 colours
	CS	20 mm	20 m coil	20 m coil*	Black only
	CT	41 mm	2 m	50 x 2 m	White only
CORNER CAP	EFA 75	75 x 75 mm	2 m	10 x 2 m	Black only
WELDING ROD	Colours to match vinyl sheet flooring		100 m coil	100 m coil*	

Special colours subject to a minimum order of 500 linear metres (excludes CS, CT, EFA 75, CF) *Supplied in standard packs only

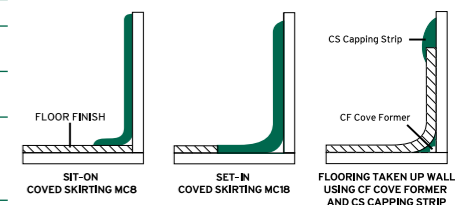

Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.

Light Reflectance Values

PRODUCT	SHADE NO	SHADE	LRV	PRODUCT	SHADE NO	SHADE	LRV	PRODUCT	SHADE NO	SHADE	LRV
2000 PUR	8000	Brushed Ochre	22.6	Bevel Line Wood PUR	1971	Light Oak	36.8	Classic Mystique PUR	1430	Silver Mist	61.8
2000 PUR	8050	Stream	35.0	Bevel Line Wood PUR	1972	Maple	38.0	Classic Mystique PUR	1460	Shoreline	54.9
2000 PUR	8150	Shadow	12.1	Bevel Line Wood PUR	1973	Beech	31.4				
2000 PUR	8230	Stonewall	29.4	Bevel Line Wood PUR	1974	American Oak	31.8	Colonia Stone PUR	4515	Imperial Black Marble	5.3
2000 PUR	8300	Oak	54.1	Bevel Line Wood PUR	1975	Rich Oak	18.6	Colonia Stone PUR	4531	Cottage Yorkstone	48.4
2000 PUR	8350	Larkspur	26.9	Bevel Line Wood PUR	1976	French Nut Tree	17.4	Colonia Stone PUR	4532	Quarried Millstone	15.4
2000 PUR	8380	Willowbank	29.4	Bevel Line Wood PUR	1977	Merbau	8.1	Colonia Stone PUR	4533	Glazed Metalstone	34.7
2000 PUR	8400	Sequoia	16.3	Bevel Line Wood PUR	1978	Mahogany	7.6	Colonia Stone PUR	4534	Balmoral Grey Stone	39.9
2000 PUR	8450	Glacier Blue	42.4	Bevel Line Wood PUR	1998	Grey Ash	27.8	Colonia Stone PUR	4535	Welsh Raven Slate	7.3
2000 PUR	8490	Saffron	40.8	Bevel Line Wood PUR	1999	Smoked Chestnut	14.1	Colonia Stone PUR	4536	Natural Limestone	53.6
2000 PUR	8500	Lace Blue	47.0					Colonia Stone PUR	4537	Fossil Limestone	39.9
2000 PUR	8550	Sapphire	21.1	Camaro Stone & Design PUR	2301	Romano Stone	26.5	Colonia Wood PUR	4401	Mountain Alder	26.3
2000 PUR	8600	Thistle	18.2	Camaro Stone & Design PUR	2304	Travertine	39.4	Colonia Wood PUR	4403	Golden Koa	27.0
2000 PUR	8650	Wild Lilac	51.2	Camaro Stone & Design PUR	2317	Black Marble	7.2	Colonia Wood PUR	4411	Woodland Oak	19.4
2000 PUR	8700	Mint Crest	44.8	Camaro Stone & Design PUR	2318	Cream Slate	44.5	Colonia Wood PUR	4431	Oxford Maple	28.3
2000 PUR	8750	Glenbeck	23.7	Camaro Stone & Design PUR	2319	Ocean Slate	23.0	Colonia Wood PUR	4432	Virginia Walnut	13.2
2000 PUR	8800	Dawn Mist	60.0	Camaro Stone & Design PUR	2331	White Oilshale	67.2	Colonia Wood PUR	4433	New England Elm	50.7
2000 PUR	8850	Buckwheat	39.2	Camaro Stone & Design PUR	2332	White Metalstone	56.6	Colonia Wood PUR	4434	Schoolhouse Oak	26.9
2000 PUR	8900	Blossom	51.5	Camaro Stone & Design PUR	2333	Ivory Stone	54.3	Colonia Wood PUR	4435	English Oak	30.6
2000 PUR	8950	Rosehip	36.8	Camaro Stone & Design PUR	2334	Portico Limestone	54.4	Colonia Wood PUR	4436	Nordic White Oak	53.7
				Camaro Stone & Design PUR	2335	Classic Limestone	51.6	Colonia Wood PUR	4437	Kings Oak	8.7
				Camaro Stone & Design PUR	2336	Classic Yorkstone	46.2				
Acoustix Forest fx	3095	Oiled Oak	34.8	Camaro Stone & Design PUR	2337	Sepentine	15.5	Designatex PUR	2136	Laurel Oak Parquet	33.3
Acoustix Forest fx	3125	Classic Oak	29.6	Camaro Stone & Design PUR	2338	Aged Metalstone	14.5	Designatex PUR	2137	English Oak Parquet	19.2
Acoustix Forest fx	3155	Smoked Oak	14.2	Camaro Stone & Design PUR	2339	Atlantic Slate	8.3	Designatex PUR	2138	Rich Oak Parquet	15.0
Acoustix Forest fx	3235	Classic Walnut	13.4	Camaro Stone & Design PUR	2340	Black Oilshale	13.1	Designatex PUR	2139	Smokehouse Herringbone	17.3
Acoustix Forest fx	3295	Warm Beech	34.0	Camaro Wood PUR	2202	Nut Tree	29.3	Designatex PUR	2140	Columned Ash	24.5
Acoustix Forest fx	3335	Rustic Oak	25.1	Camaro Wood PUR	2206	Waxed Pine	31.6	Designatex PUR	2141	Chalk White Oak	57.2
Acoustix Forest fx	3345	European Oak	20.3	Camaro Wood PUR	2216	Classic Oak	15.1	Designatex PUR	2142	Platinum Oak	31.7
Acoustix Forest fx	3385	American Oak	33.2	Camaro Wood PUR	2217	American Oak	33.6	Designatex PUR	2143	Honey Limed Ash	41.2
				Camaro Wood PUR	2220	Vintage Timber	16.7	Designatex PUR	2144	Nero Oak	6.6
Acoustix Gallery fx	6815	American Oak	34.7	Camaro Wood PUR	2229	White Limed Oak	50.2	Designatex PUR	2145	California Oak	40.7
Acoustix Gallery fx	6835	European Oak	23.6	Camaro Wood PUR	2231	Ambrosia Maple	37.4	Designatex PUR	2146	Cornish Oak	27.9
Acoustix Gallery fx	6836	Rustic Oak	29.2	Camaro Wood PUR	2232	Natural Oak	22.0	Designatex PUR	2147	Sicilian Oak	28.0
Acoustix Gallery fx	6837	Vermont Maple	34.7	Camaro Wood PUR	2233	Smoke Brushed Elm	24.6	Designatex PUR	2148	Cottage Paving	38.9
Acoustix Gallery fx	6838	Stained Maple	12.0	Camaro Wood PUR	2234	Figured Pine	13.7	Designatex PUR	2149	Tuscan Paving	21.2
Acoustix Gallery fx	6840	Mercury	48.3	Camaro Wood PUR	2235	Warwick Oak	14.7	Designatex PUR	2150	Barca Limestone	49.8
Acoustix Gallery fx	6841	Zinc	37.2	Camaro Wood PUR	2236	North American Walnut	8.9	Designatex PUR	2151	Manhattan Limestone	47.9
Acoustix Gallery fx	6842	Onyx	13.7	Camaro Wood PUR	2237	Roasted Oak	7.2	Designatex PUR	2152	Quarried Slate	26.6
Acoustix Gallery fx	6843	Silica Sand	53.0	Camaro Wood PUR	2238	Country Teak	9.2	Designatex PUR	2153	Noir Slate	7.6
Acoustix Gallery fx	6844	Mica Sand	39.3								
Acoustix Gallery fx	6845	Earth	28.2	Camaro Wood PUR	2239	Heritage Oak	7.5				
Acoustix Gallery fx	6846	Euclase Green	45.1					EC	8990	Black	8.4
Acoustix Gallery fx	6847	Celestine Blue	40.7	Camaro Loc PU	3427	Grey Mountain Ash	32.4				
Acoustix Gallery fx	6848	Lazulite Blue	15.4	Camaro Loc PU	3429	Summer Maple	34.6	Ecomax	4621	Cassia	41.1
				Camaro Loc PU	3431	Apple Tree	36.1	Ecomax	4622	Allspice	36.5
Affinity2 [®] PUR	9870	Aspen Pine	49.9	Camaro Loc PU	3432	Rich Valley Oak	26.4	Ecomax	4623	Caraway	29.6
Affinity2 [®] PUR	9871	Cracked White Oak	44.5	Camaro Loc PU	3436	Laurel Dark Oak	14.3	Ecomax	4624	Mace	25.5
Affinity2 [®] PUR	9872	Planned White Oak	46.3	Camaro Loc PU	3437	Smoke Limed Oak	28.3	Ecomax	4625	Chicory	36.5
Affinity2 [®] PUR	9873	French Limed Oak	37.2	Camaro Loc PU	3438	Tan Limed Oak	19.6	Ecomax	4626	Tuscan Blue	22.1
Affinity2 [®] PUR	9874	Champagne Oak	42.1	Camaro Loc PU	3439	Hickory Oak	30.4	Ecomax	4627	Starflower	19.7
Affinity2 [®] PUR	9875	Dappled Oak	28.8	Camaro Loc PU	3441	White Limed Oak	50.2	Ecomax	4628	Apple Mint	30.7
Affinity2 [®] PUR	9876	Harvest Oak	27.8	Camaro Loc PU	3442	Evergreen Oak	24.4	Ecomax	4629	Iris	37.1
Affinity2 [®] PUR	9877	Saw Mill Oak	27.8	Camaro Loc PU	3443	Butternut Oak	20.6	Ecomax	4631	Santolina	41.1
Affinity2 [®] PUR	9878	Cross Sawn Timber	29.0	Camaro Loc PU	3446	Vintage Timber	16.7	Ecomax	4632	Anise Grey	25.4
Affinity2 [®] PUR	9879	Hazel Oak	21.1	Camaro Loc PU	3452	Grey Flagstone	42.7	Ecomax	4633	Blackseed	5.6
Affinity2 [®] PUR	9880	Smoked Walnut	17.7								
Affinity2 [®] PUR	9881	Flamed Chestnut	15.1	Classic Mystique PUR	1160	Smokestone	28.4	Ejecta Accessories	9510	Black	4.3
Affinity2 [®] PUR	9882	Huckleberry Oak	13.2	Classic Mystique PUR	1200	Pale Slate	47.0	Ejecta Accessories	9520	White	79.2
Affinity2 [®] PUR	9883	Reclaimed Pine	25.1	Classic Mystique PUR	1210	Cloudburst	31.8	Ejecta Accessories	9530	Dark Grey	23.0
Affinity2 [®] PUR	9884	Seasoned Grey Oak	27.4	Classic Mystique PUR	1220	Delta Blue	11.0	Ejecta Accessories	9540	Grey	28.6
Affinity2 [®] PUR	9885	Jet Black Ash	6.0	Classic Mystique PUR	1230	Wild Mint	43.6	Ejecta Accessories	9550	Light Grey	46.5
				Classic Mystique PUR	1240	Cornbrook	52.4	Ejecta Accessories	9560	Brown	23.6
Bevel Line Stone PUR	1980	Ivory Stone	53.6	Classic Mystique PUR	1250	Coral Drift	19.3	Ejecta Accessories	9570	Dark Brown	8.1
Bevel Line Stone PUR	1981	Portland Stone	51.4	Classic Mystique PUR	1260	Sunblaze	13.5	Ejecta Accessories	9580	Fawn	37.0
Bevel Line Stone PUR	1982	Shellstone	45.8	Classic Mystique PUR	1320	Asparagus	37.3	Ejecta Accessories	9590	Light Fawn	53.3
Bevel Line Stone PUR	1983	Limestone	47.7	Classic Mystique PUR	1330	Mountain Lake	28.1	Ejecta Accessories	9600	Beige	28.5
Bevel Line Stone PUR	1984	Sandstone	56.7	Classic Mystique PUR	1370	Satinwood	55.2	Ejecta Accessories	9610	Light Beige	41.7
Bevel Line Stone PUR	1985	Smoked Limestone	51.5	Classic Mystique PUR	1380	Nocturne	12.9	Ejecta Accessories	9620	Russet	17.9
Bevel Line Stone PUR	1986	Brushed Concrete	45.9	Classic Mystique PUR	1400	Quartz	50.3	Ejecta Accessories	9630	Cream	43.5
Bevel Line Stone PUR	1987	Wet Concrete	34.6	Classic Mystique PUR	1410	Ladoga	46.1	Ejecta Accessories	9640	Green	22.5
Bevel Line Stone PUR	1988	Burnt Sandstone	16.9					Ejecta Accessories	9650	Blue	28.9
Bevel Line Stone PUR	1989	Black Limestone	13.7								

Light Reflectance Values

PRODUCT	SHADE NO	SHADE	LRV	PRODUCT	SHADE NO	SHADE	LRV	PRODUCT	SHADE NO	SHADE	LRV
Expona Design Wood PUR	6138	Classic Oak	21.6	Expona Commercial Wood PUR	4071	Light Varnished Wood	35.6	Expona Flow Infinity PUR	9863	Auburn	17.1
Expona Design Wood PUR	6139	American Oak	32.4	Expona Commercial Wood PUR	4072	Brown Weathered Spruce	14.9	Expona Flow Infinity PUR	9864	Autumn Rain	24.2
Expona Design Wood PUR	6146	Silvered Driftwood	18.6	Expona Commercial Wood PUR	4073	Blue Weathered Spruce	19.8	Expona Flow Infinity PUR	9865	Night Sky	12.5
Expona Design Wood PUR	6149	Antique Oak	16.1	Expona Commercial Wood PUR	4074	Beige Weathered Spruce	22.5	Expona Flow Infinity PUR	9866	Raven	11.8
Expona Design Wood PUR	6151	Blond Country Plank	34.3	Expona Commercial Wood PUR	4081	Blond Limed Oak	33.9	Expona Flow Infinity PUR	9867	Espresso	10.2
Expona Design Wood PUR	6155	Walnut	11.4	Expona Commercial Wood PUR	4082	Grey Limed Oak	24.9	Expona Flow Infinity PUR	9868	Firelight	16.3
Expona Design Wood PUR	6173	Blond Indian Apple	34.1	Expona Commercial Wood PUR	4083	Dark Limed Oak	11.0	Expona Flow Infinity PUR	9869	Honey Beige	29.2
Expona Design Wood PUR	6174	Aged Indian Apple	16.0	Expona Commercial Wood PUR	4084	Brown Limed Oak	13.2				
Expona Design Wood PUR	6178	Dark Brushed Oak	9.9	Expona Commercial Wood PUR	4085	Light Classic Oak	33.1	Expona SimPlay Wood PUR	2500	Rich Oak	14.8
Expona Design Wood PUR	6179	Natural Brushed Oak	23.0	Expona Commercial Wood PUR	4086	Honey Classic Oak	23.0	Expona SimPlay Wood PUR	2501	Light Cherry	25.7
Expona Design Wood PUR	6182	Light Elm	25.4	Expona Commercial Wood PUR	4088	Dark Classic Oak	15.9	Expona SimPlay Wood PUR	2502	Natural Oak	25.0
Expona Design Wood PUR	6183	Black Elm	9.4	Expona Commercial Wood PUR	4091	Vintage Timber	16.7	Expona SimPlay Wood PUR	2503	American Oak	34.4
Expona Design Wood PUR	6185	White Oak	49.1	* 3 colours in each shade: 4067: 26.9, 12.5, 10.4 4068: 32.7, 17.9, 10.7				Expona SimPlay Wood PUR	2504	Rich Walnut	6.0
Expona Design Wood PUR	6204	Grey Heritage Cherry	10.0					Expona SimPlay Wood PUR	2505	Dark Country Oak	11.4
Expona Design Wood PUR	6222	Amber Classic Oak	17.9	Expona Control Wood PUR	6500	American Oak	31.2	Expona SimPlay Wood PUR	2506	Grey Country Oak	40.4
Expona Design Stone PUR	7153	Black Slate	9.2	Expona Control Wood PUR	6501	Blond Country Plank	27.7	Expona SimPlay Wood PUR	2507	Blond Country Oak	35.6
Expona Design Stone PUR	7154	Atlantic Slate	13.1	Expona Control Wood PUR	6502	Nut Tree	29.5	Expona SimPlay Wood PUR	2508	Golden Rustic Oak	17.1
Expona Design Stone PUR	7155	Silver Slate	24.4	Expona Control Wood PUR	6503	Classic Oak	22.8	Expona SimPlay Wood PUR	2509	Light Grey Finesline	22.6
Expona Design Stone PUR	7173	Classic Limestone	60.3	Expona Control Wood PUR	6504	Weathered Country Plank	10.5	Expona SimPlay Wood PUR	2510	Dark Grey Finesline	11.9
Expona Design Stone PUR	7214	Light Contour	39.8	Expona Control Wood PUR	6505	White Oak	47.8	Expona SimPlay Wood PUR	2511	Natural Ash	21.9
Expona Design Stone PUR	7215	Dark Contour	10	Expona Control Wood PUR	6506	Light Elm	22.7	Expona SimPlay Wood PUR	2512	Grey Ash	27.9
Expona Design Stone PUR	7219	Roman Limestone	31.1	Expona Control Stone PUR	7500	Portland Stone	51.4	Expona SimPlay Wood PUR	2513	White Rustic Pine	40.8
Expona Design Stone PUR	7233	Warm Grey Concrete	22.8	Expona Control Stone PUR	7501	Classic Limestone	47.3	Expona SimPlay Wood PUR	2514	Natural Rustic Pine	21.5
Expona Design Stone PUR	7237	Cool Grey Concrete	22.8	Expona Control Stone PUR	7502	Classic Yorkstone	44.3	Expona SimPlay Wood PUR	2515	Brown Rustic Oak	11.3
Expona Design Stone PUR	7238	Cool Grey Concrete	13.9	Expona Control Stone PUR	7503	Smoked Limestone	37.3	Expona SimPlay Wood PUR	2516	Grey Rustic Oak	22.3
Expona Design Stone PUR	8076	Mocca Matrix	8.9	Expona Control Stone PUR	7504	Warm Grey Concrete	21.3	Expona SimPlay Wood PUR	2517	Natural Rustic Oak	15.3
Expona Design Stone PUR	8077	Crème Matrix	35.1	Expona Control Stone PUR	7506	Roman Limestone	32.5	Expona SimPlay Wood PUR	2518	Grey Mystique Wood	15.5
Expona Design Stone PUR	8122	Black Treadplate	12.3	Expona Control Stone PUR	7507	Cambrian Stone	24.3	Expona SimPlay Wood PUR	2519	Brown Mystique Wood	8.7
								Expona SimPlay Wood PUR	2520	Light Classic Oak	20.4
Expona Commercial Stone PUR	1921	Silver Slate	26.2	Expona Flow Wood PUR	9820	Blond Oak	27.7	Expona SimPlay Wood PUR	2521	Medium Classic Oak	20.2
Expona Commercial Stone PUR	1992	Classic Yorkstone	59.5	Expona Flow Wood PUR	9821	Honey Oak	22.0	Expona SimPlay Stone & Effect PUR	2540	Limed Concrete	47.0
Expona Commercial Stone PUR	1993	Cambrian Stone	33.1	Expona Flow Wood PUR	9822	Toasted Oak	18.2	Expona SimPlay Stone & Effect PUR	2541	Black Concrete	11.5
Expona Commercial Stone PUR	4075	Grey Plywood	9.4	Expona Flow Wood PUR	9823	English Oak	24.2	Expona SimPlay Stone & Effect PUR	2542	Champagne Limestone	50.0
Expona Commercial Stone PUR	4076	Brown Plywood	8.4	Expona Flow Wood PUR	9824	Aged Oak	8.1	Expona SimPlay Stone & Effect PUR	2543	Jerusalem Limestone	43.2
Expona Commercial Stone PUR	4077	Birch Trunk	35.4	Expona Flow Wood PUR	9825	Sun Bleached Oak	31.4	Expona SimPlay Stone & Effect PUR	2544	Cathedral Limestone	35.2
Expona Commercial Stone PUR</											

Light Reflectance Values

PRODUCT	SHADE NO	SHADE	LRV	PRODUCT	SHADE NO	SHADE	LRV	PRODUCT	SHADE NO	SHADE	LRV
Harmony fx PUR	3295	Warm Beech	34.0	Pearlazzo PUR	9722	Purple Crush	14.2	Polysafe Astral PUR	4080	Black Opal	8.8
Harmony fx PUR	3335	Rustic Oak	25.1	Pearlazzo PUR	9723	Caramel	39.3	Polysafe Astral PUR	4190	Arkose	37.9
Harmony fx PUR	3345	European Oak	20.3	Pearlazzo PUR	9724	Wholemeal	30.8	Polysafe Astral PUR	4200	Nebula Blue	11.5
Harmony fx PUR	3855	American Oak	33.2	Pearlazzo PUR	9725	Dark Berry	12.4	Polysafe Astral PUR	4220	Aquarius	16.9
Harmony fx PUR	6301	Laine	47.6					Polysafe Astral PUR	4230	Space Mauve	17.5
Harmony fx PUR	6302	Jacinthe	34.7	Polyclad Pro PU	4092	Biscuit Beige	62.0	Polysafe Astral PUR	4240	Lunar Grey	11.7
Harmony fx PUR	6303	Graphite	23.1	Polyclad Pro PU	4093	White Chalk	79.7	Polysafe Astral PUR	4300	Starburst	25.7
Harmony fx PUR	6311	Sable	56.1	Polyclad Pro PU	4094	Frosted Grey	64.8	Polysafe Astral PUR	4310	Red Sky	13.9
Harmony fx PUR	6312	Citron Vert	43.7	Polyclad Pro PU	4095	Grey Steel	56.0	Polysafe Astral PUR	4370	North Star	51.6
Harmony fx PUR	6313	Marine	18.4	Polyclad Pro PU	4096	Dusted Blue	71.6	Polysafe Astral PUR	4380	Isis	28.6
Harmony fx PUR	6314	Aqua	37.6	Polyclad Pro PU	4097	Blue Shingle	71.1	Polysafe Astral PUR	4440	Greenstone	25.9
Harmony fx PUR	6315	Tonnerre	33.1					Polysafe Astral PUR	4460	Calcite Blue	23.4
Harmony fx PUR	6316	Beige	59.6	Polyclad Plus PU	2700	Dove White	71.7	Polysafe Astral PUR	4620	Feldspar	35.4
Harmony fx PUR	6317	Soleil	53.9	Polyclad Plus PU	2710	Nimbus Grey	70.2				
Harmony fx PUR	6318	Cerise	20.4	Polyclad Plus PU	2800	Frosted Cream	65.7	Polysafe Corona PUR	5470	Drystone	48.8
Harmony fx PUR	6319	Argile	36.5	Polyclad Plus PU	2810	Spring Fern	62.2	Polysafe Corona PUR	5480	Mango	33.4
Harmony fx PUR	6320	Etain	25.5	Polyclad Plus PU	2830	Summer Sky	60.6	Polysafe Corona PUR	5490	Seawater	14.9
Harmony fx PUR	6321	Taupe	18.9	Polyclad Plus PU	2840	Polar Ice	73.0	Polysafe Corona PUR	5500	Barley	42.0
Harmony fx PUR	6322	Crépuscule	14.1					Polysafe Corona PUR	5510	Bluebell	23.3
Harmony fx PUR	6323	Fauve	46.2	Polyflex Plus	6010	Snowdrop	69.7	Polysafe Corona PUR	5520	Tulip	20.1
Harmony fx PUR	6324	Ivoire	62.6	Polyflex Plus	6040	Black Tulip	5.1	Polysafe Corona PUR	5530	Otter	22.8
Harmony fx PUR	6325	Ciment	41.7	Polyflex Plus	6060	Magnolia	37.1	Polysafe Corona PUR	5540	Grasshopper	37.0
Harmony fx PUR	6326	Béton	24.9	Polyflex Plus	6130	Pearl Grey	32.9	Polysafe Corona PUR	5550	Pacific	32.7
Harmony fx PUR	6840	Mercury	48.3	Polyflex Plus	6180	Walnut	11.2	Polysafe Corona PUR	5560	Blackbird	11.1
Harmony fx PUR	6841	Zinc	37.2	Polyflex Plus	6300	Dark Brown	7.5	Polysafe Corona PUR	5570	Seal	37.7
Harmony fx PUR	6842	Onyx	13.7	Polyflex Plus	7010	Cotswold Green	29.9	Polysafe Corona PUR	5580	Geyser	29.5
Harmony fx PUR	6843	Silica Sand	53.0	Polyflex Plus	7030	Pennine Fawn	38.2				
Harmony fx PUR	6844	Mica Sand	39.3	Polyflex Plus	7040	Brecon Beige	32.3	Polysafe Hydro	H 4770	Woodland Grey	27.5
Harmony fx PUR	6845	Earth	28.2	Polyflex Plus	7060	Firth Grey	25.5	Polysafe Hydro	H 4800	Oystershell	34.4
Harmony fx PUR	6846	Euclase Green	45.1	Polyflex Plus	7080	Avon Sand	36.6	Polysafe Hydro	H 4850	Blue Forge	9.2
Harmony fx PUR	6847	Celestine Blue	40.7	Polyflex Plus	7100	Cambrian Bronze	26.0	Polysafe Hydro	H 4860	Bisque	45.6
Harmony fx PUR	6848	Lazulite Blue	15.4	Polyflex Plus	7110	Border Grey	50.0	Polysafe Hydro	H 4870	Marine	18.5
				Polyflex Plus	7310	Mourne Grey	35.0	Polysafe Hydro	H 4930	White Stone	43.8
Mystique PUR	3410	Grigio	25.6	Polyflex Plus	7320	Lomond Grey	30.7	Polysafe Hydro	H 4940	Tempered Steel	25.0
Mystique PUR	3440	Amra	47.7	Polyflex Plus	7330	Dover Grey	58.3	Polysafe Hydro	H 4960	Sheared Slate	26.2
Mystique PUR	3460	Corallo	28.7	Polyflex Plus	7340	Romey Green	44.5				
Mystique PUR	3480	Bianco	65.0	Polyflex Plus	7350	Lakeland Blue	25.6	Polysafe Hydro Evolve	4251	Indus	58.3
Mystique PUR	3500	Ametista	47.2	Polyflex Plus	7360	Mendip Mauve	46.8	Polysafe Hydro Evolve	4252	Amazon	59.3
Mystique PUR	3510	Azurite	11.5	Polyflex Plus	7370	Cornish Cream	47.9	Polysafe Hydro Evolve	4253	Colorado	44.2
Mystique PUR	3520	Celeste	41.1	Polyflex Plus	7380	Anglian Red	20.1	Polysafe Hydro Evolve	4254	Danube	42.2
Mystique PUR	3560	Beola	57.9	Polyflex Plus	7390	Wensley Beige	47.6	Polysafe Hydro Evolve	4255	Black Volta	6.4
Mystique PUR	3570	Azul	34.2	Polyflex Plus	7400	Durham Fawn	46.7	Polysafe Hydro Evolve	4256	Blue Nile	33.7
Mystique PUR	3580	Giallo	47.2	Polyflex Plus	7410	Jersey Tan	33.9	Polysafe Hydro Evolve	4257	Tigris	27.7
Mystique PUR	3600	Titanio	46.9	Polyflex Plus	7420	Arran Beige	58.4	Polysafe Hydro Evolve	4258	Adriatic	27.2
Mystique PUR	3620	Alpi	42.8								
				Polyflor Conductive ROF	5980	Black	4.9	Polysafe Modena PUR	4042	Grey Fluorite	47.5
OHMega EC	6002	Thunderstorm	46.3					Polysafe Modena PUR	4043	Agate Grey	38.3
OHMega EC	6003	Warm Haze	65.4	Polyflor Sport	7512	Blue	15.0	Polysafe Modena PUR	4044	Gypsum	49.5
OHMega EC	6004	Tempest	33.1	Polyflor Sport	7515	Green	18.0	Polysafe Modena PUR	4045	Jetstone	14.7
OHMega EC	6005	Frosty Glen	65.3	Polyflor Sport	7516	Maple	36.9	Polysafe Modena PUR	4046	Copal	39.4
OHMega EC	6006	Morning Dew	52.5					Polysafe Modena PUR	4047	Galena	27.2
				Polysafe Apex	4201	Green Quartz	24.0	Polysafe Modena PUR	4048	Citrina	44.4
Pearlazzo PUR	9701	Wild Flax	56.3	Polysafe Apex	4202	Chromite	15.1	Polysafe Modena PUR	4049	Andesite	26.4
Pearlazzo PUR	9702	Lemon Ice	54.5	Polysafe Apex	4203	Biotite	6.1	Polysafe Modena PUR	4051	Angelite	40.0
Pearlazzo PUR	9703	Chalk Burst	63.5	Polysafe Apex	4204	Breccia	17.8	Polysafe Modena PUR	4052	Green Tourmaline	17.3
Pearlazzo PUR	9704	Mineral	43.2	Polysafe Apex	4205	Siltstone	22.6	Polysafe Modena PUR	4053	Orange Calcite	23.8
Pearlazzo PUR	9705	Charcoal	9.8	Polysafe Apex	4206	Red Ochre	12.8	Polysafe Modena PUR	4054	Blue Quartz	16.9
Pearlazzo PUR	9706	Mint Crisp	44.5					Polysafe Modena PUR	4055	Aventurine	44.9
Pearlazzo PUR	9707	Satin Jade	20.8	Polysafe Arena PUR	5081	Linen	45.6	Polysafe Modena PUR	4056	Garnet	14.7
Pearlazzo PUR	9708	Alpine Meadow	40.0	Polysafe Arena PUR	5082	Steelwood	21.9				
Pearlazzo PUR	9709	Skylight	43.1	Polysafe Arena PUR	5083	Chambrey	33.5	Polysafe Mosaic PUR	4105	Grey Fusion	38.5
Pearlazzo PUR	9710	Seafoam	43.2	Polysafe Arena PUR	5084	Frosted Silver	63.2	Polysafe Mosaic PUR	4115	Pearlite	54.6
Pearlazzo PUR	9711	Atlantic Mist	25.7	Polysafe Arena PUR	5085	Sand Grain	45.3	Polysafe Mosaic PUR	4125	Akoya	41.1
Pearlazzo PUR	9712	Sandcastle	46.6	Polysafe Arena PUR	5086	Brushed Titanium	13.7	Polysafe Mosaic PUR	4135	Orient Grey	22.5
Pearlazzo PUR	9713	Truffle	32.2	Polysafe Arena PUR	5087	Light Concrete	33.3	Polysafe Mosaic PUR	4145	Freshwater	25.1
Pearlazzo PUR	9715	Lilac Bloom	30.2	Polysafe Arena PUR	5088	Cement	41.9	Polysafe Mosaic PUR	4155	Earthstone	38.7
Pearlazzo PUR	9716	Toasted Almond	50.6	Polysafe Arena PUR	5089	Dark Concrete	23.2	Polysafe Mosaic PUR	4165	Graphite Pearl	17.6
Pearlazzo PUR	9717	Autumn Fire	24.1	Polysafe Arena PUR	5090	Crema Nova	53.6	Polysafe Mosaic PUR	4175	South Sea	18.9
Pearlazzo PUR	9718	Rain Cloud	34.2	Polysafe Arena PUR	5091	Flagstone Grey	35.0	Polysafe Mosaic PUR	4185	Sunstone	24.2
Pearlazzo PUR	9719	Sailcloth	50.5	Polysafe Arena PUR	5092	Clay Stone	24.7	Polysafe Mosaic PUR	4195	Green Opal	34.4
Pearlazzo PUR	9720	Ocean Ripple	13.1								
Pearlazzo PUR	9721	Sunrise	47.6	Polysafe Astral PUR	4050	Deep Sapphire	14.1	Polysafe Standard PUR	4020	Silver Birch	26.7

Light Reflectance Values

PRODUCT	SHADE NO	SHADE	LRV	PRODUCT	SHADE NO	SHADE	LRV	PRODUCT	SHADE NO	SHADE	LRV
Polysafe Standard PUR	4030	Maple Fawn	27.3	Polysafe Wood fx Acoustix PUR	3292	Warm Beech	35.2	Secura PUR	2119	Grey Flagstone	14.4
Polysafe Standard PUR	4040	Redwood	12.1	Polysafe Wood fx Acoustix PUR	3302	Cherry	29.4	Secura PUR	2120	Linear Ivory	67.4
Polysafe Standard PUR	4060	Cedar Blue	13.9	Polysafe Wood fx Acoustix PUR	3332	Rustic Oak	25.8	Secura PUR	2121	Linear Fawn	46.6
Polysafe Standard PUR	4090	Nordic Grey	23.6	Polysafe Wood fx Acoustix PUR	3342	European Oak	23.3	Secura PUR	2122	Linear Charcoal	13.8
Polysafe Standard PUR	4110	Alpine Green	27.1	Polysafe Wood fx Acoustix PUR	3352	Silver Oak	22.9	Secura PUR	2123	Alabaster Elm	53.0
Polysafe Standard PUR	4120	Antique Copper	17.8	Polysafe Wood fx Acoustix PUR	3362	Mahogany	10.8	Secura PUR	2124	Aspen	62.3
Polysafe Standard PUR	4130	Arctic Blue	25.2	Polysafe Wood fx Acoustix PUR	3382	American Oak	37.2	Secura PUR	2125	Norwegian Maple	33.1
Polysafe Standard PUR	4140	Autumn Beige	38.9	Polysafe Wood fx Acoustix PUR	3992	Brazilian Walnut	8.3	Secura PUR	2126	Natural Oak	31.9
Polysafe Standard PUR	4150	Black Walnut	6.3					Secura PUR	2127	Blond Oak	42.3
Polysafe Standard PUR	4490	Twilight	9.8	Prestige PUR	1600	Alabaster	59.4	Secura PUR	2128	Golden Oak	36.5
Polysafe Standard PUR	4520	Elmwood	38.8	Prestige PUR	1800	Pale Iris	39.3	Secura PUR	2129	Antique Herringbone	20.2
Polysafe Standard PUR	4540	Ash Grey	36.9	Prestige PUR	1830	Clove	48.4	Secura PUR	2130	Country Oak	20.0
Polysafe Standard PUR	4560	Storm Blue	15.3	Prestige PUR	1840	Stone Blue	30.3	Secura PUR	2131	Antique Oak	7.7
Polysafe Standard PUR	4570	Cool Aqua	34.9	Prestige PUR	1850	Cinnamon	51.0	Secura PUR	2132	Sweet Chestnut	15.6
Polysafe Standard PUR	4580	Lilac Blue	22.8	Prestige PUR	1860	Gingerlily	49.2	Secura PUR	2133	Black Walnut	10.7
				Prestige PUR	1870	Peppermint	43.5	Secura PUR	2134	African Mahogany	8.5
Polysafe Ultima	4290	Aurora Grey	14.6	Prestige PUR	1880	Chive	48.4	Secura PUR	2135	Ebony	12.1
Polysafe Ultima	4330	Pearl Granite	18.7	Prestige PUR	1890	Thyme	58.6				
Polysafe Ultima	4340	Iron Ore	12.4	Prestige PUR	1900	Bilberry	23.3	Standard XL	8580	Black Cherry	8.8
Polysafe Ultima	4350	Baltic Green	22.6	Prestige PUR	1910	Nutmeg	58.9	Standard XL	8640	Black Panther	5.5
Polysafe Ultima	4360	Mortar	22.9	Prestige PUR	1920	Lavender Mist	52.4	Standard XL	8740	Dove White	74.8
Polysafe Ultima	4390	Bluestone	14.2	Prestige PUR	1930	Grey Marl	40.5	Standard XL	9010	Nougat	39.7
				Prestige PUR	1940	Liquorice	9.3	Standard XL	9040	Venetian Blue	19.3
Polysafe Verona PUR	5201	Cookie Cream	64.0	Prestige PUR	1950	Ice Crystal	56.9	Standard XL	9080	Eau De Nil	32.2
Polysafe Verona PUR	5202	Rainstorm	44.4	Prestige PUR	1960	Chilli	24.5	Standard XL	9110	Mushroom	39.7
Polysafe Verona PUR	5203	Dolphin Grey	25.8					Standard XL	9120	Graphite	27.5
Polysafe Verona PUR	5204	Café Noir	11.2	Saarfloor Diamant	203	Rice	29.1	Standard XL	9170	Atlantic Blue	23.4
Polysafe Verona PUR	5205	Skyline	47.0	Saarfloor Diamant	205	Mocha	18.6	Standard XL	9180	Desert Sand	37.2
Polysafe Verona PUR	5206	Blue Lagoon	31.9	Saarfloor Diamant	206	Almond	47.4	Standard XL	9190	Sea Green	38.3
Polysafe Verona PUR	5207	Nightfall	12.3	Saarfloor Diamant	210	Molasses	15.1	Standard XL	9200	Slate Grey	31.8
Polysafe Verona PUR	5208	Horizon Blue	30.5	Saarfloor Diamant	213	Sea Salt	39.5	Standard XL	9220	Conifer	25.3
Polysafe Verona PUR	5209	Freshmint	51.7	Saarfloor Diamant	306	Pepper	47.6	Standard XL	9240	Oatmeal	55.3
Polysafe Verona PUR	5210	Oregano	48.3	Saarfloor Diamant	307	Raisin	31.0	Standard XL	9300	Red Cedar	30.7
Polysafe Verona PUR	5211	Seagrass	25.2	Saarfloor Diamant	313	Cotton	59.2	Standard XL	9340	Polar Grey	53.5
Polysafe Verona PUR	5212	Biscotti	44.7	Saarfloor Diamant	408	Lentil	29.7				
Polysafe Verona PUR	5213	Caramel Latte	33.6	Saarfloor Diamant	413	Melon	13.6	XL PU	3700	Pumice	53.9
Polysafe Verona PUR	5214	Marshmallow	44.9	Saarfloor Diamant	503	Mustard	41.9	XL PU	3710	Fossil	40.5
Polysafe Verona PUR	5215	Chocolate Chip	15.8	Saarfloor Diamant	607	Apricot	28.3	XL PU	3720	Flint	25.4
Polysafe Verona PUR	5216	Soft Peach	47.0	Saarfloor Diamant	611	Tomato	16.7	XL PU	3730	Blue Nickel	38.6
Polysafe Verona PUR	5217	Summer Coulis	20.9	Saarfloor Diamant	702	Blue Poppy	25.6	XL PU	3740	Crystal Blue	37.8
Polysafe Verona PUR	5218	Butterscotch	35.2	Saarfloor Diamant	707	Water Lily	18.8	XL PU	3750	Tanzanite Blue	19.1
				Saarfloor Diamant	7						

Product Specification

	PEARLAZZO PUR	PRESTIGE PUR	MYSTIQUE PUR	CLASSIC MYSTIQUE PUR	2000 PUR
Gauge	2mm	2mm	2mm	2mm	2mm, 2.5mm
Wear Layer	2mm	2mm	2mm	2mm	2mm
Roll Size	2m x 20m = 40m ²	2m x 20m = 40m ²	2m x 20m = 40m ²	2m x 20m = 40m ²	2m x 20m = 40m ² 2m x 15m = 30m ²
Tile Size	-	300 x 300mm 608 x 608mm	300 x 300mm 608 x 608mm	300 x 300mm 608 x 608mm	300 x 300mm 608 x 608mm*
Weight	2950g/m ²	2950g/m ²	3250g/m ²	3250g/m ²	2mm: 3550g/m ² 2.5mm: 4552g/m ²
EN 649 / EN ISO 10581	Conforms	Conforms	Conforms	Conforms	Conforms
Use Area Classification	23, 34, 43	23, 34, 43	23, 34, 43	23, 34, 43	23, 34, 43
Agrément	✓	✓	✓	✓	-
ASTM F1913	Conforms	Conforms	Conforms	Conforms	Conforms
ASTM F1700	-	Conforms	Conforms	Conforms	Conforms
EN 13501-1	Class Bfl-S1	Class Bfl-S1	Class Bfl-S1	Class Bfl-S1	Class Bfl-S1
EN ISO 9239-1	≥8kw/m ²	≥8kw/m ²	≥8kw/m ²	≥8kw/m ²	≥8kw/m ²
EN ISO 11925-2	Pass	Pass	Pass	Pass	Pass
ASTM E662	<450	<450	<450	<450	<450
ASTM E648	Class 1	Class 1	Class 1	Class 1	Class 1*
EN 660-2 Abrasion Group EN ISO 10581	Group T Type I	Group T Type I	Group P Type I	Group P Type I	Group M Type II
EN 13893	Class DS (dry)	Class DS (dry)	Class DS (dry)	Class DS (dry)	Class DS (dry)
Indoor Air Comfort Gold	Approved	Approved	Approved	Approved	Approved
FloorScore	Certified product	Certified product	Certified product	Certified product	Certified product
AgBB	Pass	Pass	Pass	Pass	Pass
BRE Green Guide	A+ rating	A+ rating	A+ rating	A+ rating	A+ rating
Hygiene	+	+	+	+	+
Maintenance Enhancement	Polyurethane reinforcement	Polyurethane reinforcement	Polyurethane reinforcement	Polyurethane reinforcement	Polyurethane reinforcement

• Tile size available in selected gauges - see tile availability table for more details.

* Certification available for 2mm only.

✚ All Polyflor commercial sheet vinyl ranges provide a continuous, impervious and hygienic flooring solution which can be confidently cleaned in accordance with recommended maintenance procedures and approved maintenance products. The implementation of an effective cleaning regime is the most important defence against infection.



Tile availability and coverage	Tile size	Coverage	Tiles per box
Prestige PUR, Mystique PUR, Classic Mystique PUR, 2000 PUR 2mm, XL PU 2mm, Standard XL 2mm, Polyflor SD, Finesse SD, Polyflor EC	608 x 608mm	5.17m ²	14
Prestige PUR, Mystique PUR, Classic Mystique PUR, 2000 PUR 2mm, XL PU 2mm, Standard XL 2mm, Polyflex Plus PU 1.5/2.0mm	300 x 300mm	4.5m ²	50
2000 PUR 2.5mm, Polyflex Plus PU 2.5mm	300 x 300mm	3.6m ²	40
Noppe Stud Tile 3mm	500 x 500mm	5m ²	20
Noppe Stud Tile 4mm	500 x 500mm	4m ²	16

Product Specification

	XL PU	STANDARD XL	POLYFLEX PLUS
Gauge	1.5mm, 2mm	1.5mm, 2mm 2.5mm, 3mm	1.5mm, 2mm, 2.5mm
Roll Size	2m x 27.5m = 55m ² 2m x 20m = 40m ²	2m x 27.5m = 55m ² 2m x 20m = 40m ² 2m x 15m = 30m ² 2m x 13m = 26m ²	-
Tile Size	300 x 300mm* 608 x 608mm*	300 x 300mm* 608 x 608mm*	300 x 300mm
Weight	1.5mm: 2360g/m ² 2mm: 3200g/m ²	1.5mm: 2360g/m ² 2mm: 3200g/m ² 2.5mm: 4200g/m ² 3mm: 5010g/m ²	1.5mm: 2800g/m ² 2mm: 3800g/m ² 2.5mm: 4860g/m ²
EN 649 / EN ISO 10581	Conforms	Conforms	Conforms*
Use Area Classification	1.5mm: 23, 32, 41 2mm: 23, 34, 43	1.5mm: 23, 32, 41 2mm: 23, 34, 43 2.5mm: 23, 34, 43 3mm: 23, 34, 43	1.5mm: 23, 31 2mm: 23, 33, 42 2.5mm: 23, 34, 43
ASTM F1913	Conforms	Conforms	-
ASTM F1700	Conforms	Conforms	-
EN 13501-1	Class Bfl-S1	Class Bfl-S1	Class Bfl-S1
EN ISO 9239-1	≥8kw/m ²	≥8kw/m ²	≥8kw/m ²
EN ISO 11925-2	Pass	Pass	Pass
ASTM E662	<450	<450†	-
ASTM E648	Class 1	Class 1†	Class 1
EN 660-2 Abrasion Group EN ISO 10581	Group M Type II	Group M Type II	Group F Type III
EN 13893	Class DS (dry)	Class DS (dry)	Class DS (dry)
Indoor Air Comfort Gold	Approved	Approved	-
FloorScore	Certified product	Certified product	-
AgBB	Pass	Pass	-
BRE Green Guide	A+ rating	A+ rating	A+ Generic
Hygiene	+	+	-
Maintenance	Polyurethane surface treatment	-	Polyurethane surface treatment

† Certification available for 1.5mm and 2mm only.

• Tile size available in selected gauges - see tile availability table for more details.

* 40mm mandrel.

✚ All Polyflor commercial sheet vinyl ranges provide a continuous, impervious and hygienic flooring solution which can be confidently cleaned in accordance with recommended maintenance procedures and approved maintenance products. The implementation of an effective cleaning regime is the most important defence against infection.



Product Specification

POLYSAFE	VERONA PUR	CORONA PUR	ASTRAL PUR	MOSAIC PUR	MODENA PUR	ARENA PUR	WOOD FX PUR	VOGUE ULTRA PUR
Gauge	2mm	2mm	2mm	2mm	2mm	2mm	2mm	2mm
Wear Layer	-	-	-	0.7mm	0.7mm	0.7mm	0.7mm	-
Roll Size	2m x 20m = 40m ²	2m x 20m = 40m ²	2m x 20m = 40m ²	2m x 20m = 40m ²	2m x 20m = 40m ²	2m x 20m = 40m ²	2m x 20m = 40m ²	2m x 20m = 40m ²
Weight	2600g/m ²	2400g/m ²	2450g/m ²	2400g/m ²	2780g/m ²	2780g/m ²	2780g/m ²	2400g/m ²
EN 13845	Conforms	Conforms	Conforms	Conforms	Conforms	Conforms	Conforms	Conforms
CE Marking	DA0063	DA0010	DA0009	DA0035	DA0053	DA0053	DA0053	DA0005
Use Area Classification	23, 34, 43	23, 34, 43	23, 34, 43	23, 34, 43	23, 34, 43	23, 34, 43	23, 34, 43	23, 34, 43
Agrément	✓	✓	✓	✓	✓	✓	✓	✓
ASTM F1303	Conforms	Conforms	Conforms	Conforms	Conforms	Conforms	Conforms	Conforms
EN 13501-1	Class Bfl-S1	Class Bfl-S1	Class Bfl-S1	Class Bfl-S1	Class Bfl-S1	Class Bfl-S1	Class Bfl-S1	Class Bfl-S1
EN ISO 9239-1	≥8kw/m ²	≥8kw/m ²	≥8kw/m ²	≥8kw/m ²	≥8kw/m ²	≥8kw/m ²	≥8kw/m ²	≥8kw/m ²
EN ISO 11925-2	Pass	Pass	Pass	Pass	Pass	Pass	Pass	Pass
ASTM E648	Class 1	Class 1	Class 1	Class 1	Class 1	Class 1	Class 1	Class 1
EN 13845 Abrasion Resistance	50,000 cycles	50,000 cycles	50,000 cycles	50,000 cycles	50,000 cycles	50,000 cycles	50,000 cycles	50,000 cycles
RRL Pendulum Test	≥36 (wet test)•	≥36 (wet test)•	≥36 (wet test)•	≥36 (wet test)•	≥36 (wet test)•	≥36 (wet test)•	≥36 (wet test)•	≥36 (wet test)•
Surface Roughness Rz	≥20µm	≥20µm	≥20µm	≥20µm	≥20µm	≥20µm	≥20µm	≥20µm
AS/NZS 4586	R10	R10	R10	R10	R10	R10	R10	R10
Indoor Air Comfort Gold	-	-	-	-	Approved	Approved	Approved	-
FloorScore	Certified product	Certified product	Certified product	Certified product	Certified product	Certified product	Certified product	Certified product
AgBB	Pass	Pass	Pass	Pass	Pass	Pass	Pass	Pass
BRE Green Guide	A+	A+	A+	A+	A+	A+	A+	A+
Hygiene	+	+	+	+	+	+	+	+
Maintenance Enhancement	Polysafe™ PUR	Polysafe™ PUR	Polysafe™ PUR	Polysafe™ PUR	Polysafe™ PUR	Polysafe™ PUR	Polysafe™ PUR	Polysafe™ PUR

• 4S Rubber/Slider 96. ▲ TRL/Slider 55.

+

All Polyflor commercial sheet vinyl ranges provide a continuous, impervious and hygienic flooring solution which can be confidently cleaned in accordance with recommended maintenance procedures and approved maintenance products. The implementation of an effective cleaning regime is the most important defence against infection.



Product Specification

POLYSAFE	STANDARD PUR	HYDRO	HYDRO EVOLVE	ULTIMA	WOOD FX ACOUSTIX PUR	ECOMAX	APEX
Gauge	2mm, 2.5mm, 3.5mm	2mm	2mm	2.5mm	3.7mm	2mm	2.5mm
Wear Layer	-	-	-	-	0.65mm	-	-
Roll Size	2m x 20m = 40m ² 2m x 15m = 30m ² *	2m x 20m = 40m ²	2m x 20m = 40m ²	2m x 20m = 40m ²	2m x 20m = 40m ²	2m x 20m = 40m ²	2m x 20m = 40m ²
Weight	2mm: 2430g/m ² 2.5mm: 3100g/m ² 3.5mm: 4400g/m ²	2700g/m ²	2650g/m ²	3000g/m ²	2670g/m ²	3350g/m ²	3150g/m ²
EN 13845	Conforms	Conforms	Conforms	Conforms	-	Conforms	Conforms
EN 651	-	-	-	-	Conforms	-	-
CE Marking	DA0003	DA0006	DA0052	DA0007	DA0054	-	DA0064
Use Area Classification	23, 34, 43	23, 34, 43	23, 34, 43	23, 34, 43	23, 34, 42	23, 34, 43	23, 34, 43
Agrément	✓	✓	✓	✓	✓	✓	-
ASTM F1303	Conforms	Conforms	Conforms	Conforms	-	Conforms	Conforms
EN 13501-1	Class Bfl-S1	Class Bfl-S1	Class Bfl-S1	Class Bfl-S1	Class Bfl-S1	Class Bfl-S1	Class Bfl-S1
EN ISO 9239-1	≥8kw/m ²	≥8kw/m ²	≥8kw/m ²	≥8kw/m ²	≥8kw/m ²	≥8kw/m ²	≥8kw/m ²
EN ISO 11925-2	Pass	Pass	Pass	Pass	Pass	Pass	Pass
ASTM E648	Class 1	Class 1	Class 1	Class 1	-	Class 1	Class 1
EN 13845 Abrasion Resistance	50,000 cycles	50,000 cycles	50,000 cycles	50,000 cycles	50,000 cycles	50,000 cycles	50,000 cycles
EN ISO 10140-3 (EN ISO 140-8)	-	-	-	-	≥19dB	-	-
RRL Pendulum Test	≥36 (wet test)•	≥36 (wet test)▲•	≥36 (wet test)▲•	≥40 (wet test)• ≥36 (wet test)▲	≥36 (wet test)•	≥36 (wet test)•	≥45 (wet test)•
Surface Roughness Rz	≥20µm	≥20µm	≥20µm	≥70µm	≥20µm	≥20µm	≥70µm
AS/NZS 4586	R10	Class B	Class B	R11	R10	R10	R12
Indoor Air Comfort Gold	-	-	-	-	Approved	Approved	-
FloorScore	Certified product	Certified product	Certified product	Certified product	Certified product	Certified product	Certified product
AgBB	Pass	Pass	Pass	Pass	Pass	Pass	Pass
BRE Green Guide	A+	A+	A+	A+	A+	A+	A+
Hygiene	+	+	+	+	+	+	+
Maintenance Enhancement	Polysafe™ PUR	-	-	-	Polysafe™ PUR	-	-

* 3.5mm gauge.

• 4S Rubber/Slider 96. ▲ TRL/Slider 55.

+

All Polyflor commercial sheet vinyl ranges provide a continuous, impervious and hygienic flooring solution which can be confidently cleaned in accordance with recommended maintenance procedures and approved maintenance products. The implementation of an effective cleaning regime is the most important defence against infection.



Product Specification

	FOREST FX PUR	ACOUSTIX FOREST FX PUR	ACOUSTIX GALLERY FX PUR	SECURA PUR	DESIGNATEX PUR	EXPONA FLOW PUR
Gauge	2mm	3.7mm	3.7mm	3.0mm	3.0mm	2mm
Wear Layer	0.7mm	0.65mm	0.6mm	0.35mm	0.3mm	0.7mm
Roll Size	2m x 20m = 40m ²	2m x 20m = 40m ²	2m x 20m = 40m ²	2m x 25m = 50m ² 3m x 25m = 75m ² 4m x 25m = 100m ²	2m x 25m = 50m ² 3m x 25m = 75m ² 4m x 25m = 100m ²	2m x 20m = 40m ²
Weight	2700g/m ²	2800g/m ²	2550g/m ²	1780g/m ²	1700g/m ²	2700g/m ²
EN 649 / EN ISO 10582	Conforms	-	-	-	-	Conforms
EN 651	-	Conforms	Conforms	-	-	-
EN 653 / EN ISO 26986	-	-	-	Conforms	Conforms	-
Use Area Classification	23, 34, 43	23, 34, 42	23, 33, 42	23, 32, 41	23, 31	23, 34, 43
EN 13501-1	Class Bfl-S1	Class Bfl-S1	Class Bfl-S1	Class Bfl-S1	Class Bfl-S1	Class Bfl-S1
EN ISO 9239-1	≥8kw/m ²	≥8kw/m ²	≥8kw/m ²	≥8kw/m ²	≥8kw/m ²	≥8kw/m ²
EN ISO 11925-2	Pass	Pass	Pass	Pass	Pass	Pass
EN 649 / EN ISO 10582 Abrasion Group	Group T / Type I	-	-	Group T / Type I	-	Group T / Type I
EN 651 Abrasion Group	-	Group T / Type I	Group T / Type I	-	-	-
EN 653 / EN ISO 26986 Abrasion Group	-	-	-	-	Group T / Type I	-
EN ISO 10140-3 (EN ISO 140-8)	-	≥19dB	≥19dB	≥19dB	≥17dB	-
EN 433 Residual Indentation	<0.10mm	<0.2mm	<0.2mm	<0.2mm	<0.35mm	<0.10mm
EN 13893	Class DS (dry)	Class DS (dry)	Class DS (dry)	Class DS (dry)	Class DS (dry)	Class DS (dry)
DIN 51130	R10	R10	R10	R10	R10	R10
AS/NZS 4586	R10	R10	-	R10	-	R10
Indoor Air Comfort Gold	Approved	Approved	Approved	Approved	Approved	Approved
FloorScore	Certified product	Certified product	Certified product	Certified product	Certified product	Certified product
AgBB	Very low emissions	Very low emissions	Very low emissions	Very low emissions	Very low emissions	Very low emissions
Hygiene	+	+	+	+	+	+
BRE Green Guide	A+	A+	A+	A+ Generic	A Generic	A+
Maintenance Enhancement	Polyurethane reinforcement	Polyurethane reinforcement	Polyurethane reinforcement	Polyurethane reinforcement	Polyurethane reinforcement	Polyurethane reinforcement

	HARMONY FX PUR acoustic 33	HARMONY FX PUR acoustic 43	HARMONY FX PUR compact 43
Gauge	3.7mm	3.7mm	2mm
Wear Layer	0.5mm	0.65mm	0.7mm
Roll Size	2m x 20m = 40m ²	2m x 20m = 40m ²	2m x 20m = 40m ²
Weight	2390g/m ²	2550g/m ²	2660g/m ²
EN 685 / EN ISO 10874	Conforms	Conforms	Conforms
Use Area Classification	23, 33, 42	23, 34, 42	23, 34, 43
EN 13501-1	Class Bfl-S1	Class Bfl-S1	Class Bfl-S1
EN ISO 9239-1	≥8kw/m ²	≥8kw/m ²	≥8kw/m ²
ASTM E648	Class 1	Class 1	Class 1
EN ISO 11925-2	Pass	Pass	Pass
EN ISO 10140-3 (EN ISO 140-8)	≥19dB	≥19dB	-
EN 433 Residual Indentation	<0.2mm	<0.2mm	<0.1mm
EN 13893	Class DS (dry)	Class DS (dry)	Class DS (dry)
DIN 51130	R10	R10	R10
Indoor Air Comfort Gold	Approved	Approved	Approved
FloorScore	Certified product	Certified product	Certified product
AgBB	Very low emissions	Very low emissions	Very low emissions
Hygiene	+	+	+
BRE Green Guide	A+	A+	A+
Maintenance Enhancement	Polyurethane reinforcement	Polyurethane reinforcement	Polyurethane reinforcement

+ All Polyflor commercial sheet vinyl ranges provide a continuous, impervious and hygienic flooring solution which can be confidently cleaned in accordance with recommended maintenance procedures and approved maintenance products. The implementation of an effective cleaning regime is the most important defence against infection.



Product Specification

	EXPONA DESIGN PUR	EXPONA COMMERCIAL PUR	EXPONA CONTROL PUR	EXPONA SIMPLAY PUR
Gauge	3mm	2.5mm	2.5mm	5mm
Wear Layer	0.7mm	0.55mm	0.7mm	0.7mm
Plank Size: Wood (planks per box)	152.4 x 914.4mm (24) 152.4 x 1219.2mm (18) 184.2 x 1219.2mm (15) 203.2 x 1219.2mm (14)	101.6 x 914.4mm (36) 152.4 x 914.4mm (24) 152.4 x 1219.2mm (18) 184.2 x 1219.2mm (15) 203.2 x 1219.2mm (14)	152.4 x 914.4mm (24)	177.8 x 1219.2mm (10) 185 x 1505mm (8)
Tile Size: Stone/Design (tiles per box)	304.8 x 609.6mm (18) 457.2 x 914.4mm (8) 304.8 x 914.4mm (12) 609.6 x 609.6mm (9)	304.8 x 609.6mm (18) 457.2 x 457.2mm (16) 304.8 x 914.4mm (12) 609.6 x 609.6mm (9)	304.8 x 609.6mm (18) 457.2 x 457.2mm (16)	457.2 x 457.2mm (12) 600 x 600mm (6)
Weight	5100g/m ²	4290g/m ²	4290g/m ²	8000g/m ²
EN 649 / EN ISO 10582	Conforms	Conforms	Conforms	Conforms
Use Area Classification	23, 34, 43	23, 33, 42	23, 34, 43	23, 34, 43
EN 13501-1	Class Bfl-S1	Class Bfl-S1	Class Bfl-S1	Class Bfl-S1
EN ISO 9239-1	≥8kw/m ²	≥8kw/m ²	≥8kw/m ²	≥8kw/m ²
EN ISO 11925-2	Pass	Pass	Pass	-
ASTM E662	-	-	<450	-
ASTM E648	Class 1	Class 1	Class 1	-
EN ISO 10582 Abrasion Group	Group T / Type I	Group T / Type I	Group T / Type I	Group T / Type I
EN 13893	Class DS (dry)	Class DS (dry)	Class ES (wet)	Class DS (dry)
RRL Pendulum Test	-	-	≥36 (wet test)	-
Surface Roughness Rz	-	-	≥20µm	-
DIN 51130	R10	R10	R10	R10
Maintenance Enhancement	Polyurethane reinforcement	Polyurethane reinforcement	Polyurethane reinforcement	Polyurethane reinforcement

	BEVEL LINE PUR	CAMARO PUR	CAMARO LOC PU	AFFINITY2 ⁵⁵	COLONIA PUR
Gauge	2.5mm	2mm	4mm	2mm	2mm
Wear Layer	0.7mm	0.3mm	0.3mm	0.55mm	0.2mm
Plank Size: Wood (planks per box)	101 x 914mm (36)	101.6 x 914.4mm (36) 152.4 x 914.4mm (24) 152.4 x 1219.2mm (18) 203.2 x 1219.2mm (14)	145.6 x 906.6mm (15) 177.4 x 1212.4mm (9)	184.2 x 1219.2 mm (15)	101.6 x 914.4mm (36) 152.4 x 914.4mm (24) 152.4 x 1219.2mm (18) 184.2 x 1219.2mm (15)
Tile Size: Stone/Design (tiles per box)	457 x 457mm (16)	304.8 x 304.8mm (36) 304.8 x 609.6mm (18) 457.2 x 457.2mm (16)	298 x 602.8mm (11)	-	304.8 x 304.8mm (36) 304.8 x 609.6mm (18) 457.2 x 457.2mm (16)
Weight	4290g/m ²	3600g/m ²	7025g/m ²	3500g/m ²	3680g/m ²
EN 649 / EN ISO 10582	Conforms	Conforms	Conforms	Conforms	Conforms
Use Area Classification	23, 34, 43	23, 31	23, 31	23, 33, 42	22
EN 13501-1	Class Bfl-S1	Class Bfl-S1	Class Bfl-S1	Class Bfl-S1	Class Bfl-S1
EN ISO 9239-1	≥8kw/m ²	≥8kw/m ²	≥8kw/m ²	≥8kw/m ²	≥8kw/m ²
ASTM E648	Class 1	-	-	-	-
EN 649 / EN ISO 10582 Abrasion Group	Group T / Type I	Group T / Type I	Group T / Type I	Group T / Type I	Group T / Type I
EN 13893	Class DS (dry)	Class DS (dry)	Class DS (dry)	Class DS (dry)	Class DS (dry)
DIN 51130	R10	R10	R10	R10	R10
Maintenance Enhancement	Polyurethane reinforcement	Polyurethane reinforcement	Polyurethane surface treatment	Polyurethane reinforcement	Polyurethane reinforcement



Product Specification

POLYFLOR SPORT	
Gauge	6.7mm
Roll Size	2m x 18.5m = 37m ²
Weight	Plain 4260g/m ² Maple 4510g/m ²
EN 14904	Conforms
EN 13501-1	Class CfI-S1
EN ISO 9239-1	≥4.5kw/m ²
EN ISO 11925-2	Pass
EN 649 Abrasion Group	Group T
EN 13893	Class DS (dry)
Maintenance Enhancement	Polymer surface treatment

	DIAMANT	NOPPE STUD TILE
Gauge	2mm	3mm, 4mm
Tile Size	-	500 x 500mm
Roll Size	1.90m x 15m = 28.5m ²	-
Weight	3200g/m ²	3mm: 4200g/m ² 4mm: 5600g/m ²
EN 1817	Conforms	-
EN 12199	-	Conforms
Use Area Classification	23, 34, 42	3mm: 23, 32, 41 4mm: 23, 34, 43
EN 13501-1	Class Bfl-S1	Class CfI-S1
EN ISO 9239-1	≥8kw/m ²	≥4.5kw/m ²
EN ISO 11925-2	Pass	Pass
EN 13893	Class DS (dry)	Class DS (dry)



	SD	Finesse SD	Polyflor EC	OHMega EC	Conductive ROF†
Gauge	2mm	2mm	2mm	2mm	2mm
Roll Size	2m x 20m = 40m ²	2m x 20m = 40m ²	2m x 20m = 40m ²	2m x 20m = 40m ²	2m x 20m = 40m ²
Tile Size	608 x 608mm	608 x 608mm	608 x 608mm	-	-
Weight	3400g/m ²	3030g/m ²	3500g/m ²	3060g/m ²	3300g/m ²
EN 649 / EN ISO 10581	Conforms	Conforms	Conforms	Conforms	Conforms
Use Area Classification	34, 43	34, 43	34, 43	34, 43	34, 43
Agrément	-	✓	-	-	-
ASTM F1913	Conforms	Conforms	Conforms	Conforms	Conforms
ASTM F1700	Conforms	Conforms	Conforms	-	Conforms
EN 13501-1	Class Bfl-S1	Class Bfl-S1	Class Bfl-S1	Class Bfl-S1	Class Bfl-S1
EN ISO 9239-1	≥8kw/m ²	≥8kw/m ²	≥8kw/m ²	≥8kw/m ²	≥8kw/m ²
EN ISO 11925-2	Pass	Pass	Pass	Pass	Pass
ASTM E662	<450	<450	-	-	-
ASTM E648	Class 1	Class 1	Class 1	Class 1	Class 1
EN 649/EN ISO 10581 Abrasion Group	Group M / Type II	Group P / Type I	Group M / Type II	Group P / Type I	Group M / Type II
EN 13893	Class DS (dry)	Class DS (dry)	Class DS (dry)	Class DS (dry)	Class DS (dry)
IEC 61340-4-1 R _C	1 x 10 ⁶ to 1 x 10 ⁹ ohms	1 x 10 ⁶ to 1 x 10 ⁹ ohms	5 x 10 ⁴ to 1 x 10 ⁶ ohms	1 x 10 ⁴ to 1 x 10 ⁶ ohms	-
IEC 61340-4-5	-	-	-	<20v	-
EN 1081 R ₁ /R ₂	<10 ⁹ ohms	<10 ⁹ ohms	5 x 10 ⁴ to 1 x 10 ⁶ ohms	10 ⁴ to 1 x 10 ⁶ ohms	<5 x 10 ⁴ ohms
ESD S.7.1	1 x 10 ⁶ to 1 x 10 ⁹ ohms	1 x 10 ⁶ to 1 x 10 ⁹ ohms	5 x 10 ⁴ to 1 x 10 ⁶ ohms	2.5 x 10 ⁴ to 1 x 10 ⁶ ohms	-
BRE Green Guide	A+(Generic)	A+(Generic)	A+(Generic)	A+(Generic)	A+(Generic)
Hygiene	+	+	-	+	-

† Polyflor ROF flooring for explosive handling areas, no protection from short circuit on a 240/250 volt mains. All SD results require minimum 40% R.H.

+ All Polyflor commercial sheet vinyl ranges provide a continuous, impervious and hygienic flooring solution which can be confidently cleaned in accordance with recommended maintenance procedures and approved maintenance products. The implementation of an effective cleaning regime is the most important defence against infection.



Product Specification

	POLYCLAD PRO PU	POLYCLAD PLUS PU
Gauge	1.25mm	2mm
Roll Size	1.83m x 30m = 54.9m ²	2m x 20m = 40m ²
Weight	1900g/m ²	3530g/m ²
BS 476: Part 6	-	(i)<12 (ii)<6*
BS 476: Part 7	-	Class 1*
EN 13501-1	B-s2-d0	B-s3-d0
Hygiene	+	+
Maintenance Enhancement	Polyurethane surface treatment	Polyurethane surface treatment

* For details of how this result was achieved (eg. adhesive, plasterboard), contact Polyflor.

CE 1121	
Polyflor Ltd, PO Box 3, Radcliffe New Road, Whitefield, Manchester, M45 7NR 13	
EN 15102:2007+A1:2011 Heavy duty wallcoverings	
Reaction to fire class	B-s2-d0 on plasterboard attached with an acrylic based adhesive
Release of formaldehyde	None
Release of other dangerous substances: - of heavy metals and specific elements - of vinyl chloride monomer (VCM)	<10mg/Kg <0.2mg/Kg
Sound absorption	NPD
Thermal resistance	NPD

CE 1121	
Polyflor Ltd, PO Box 3, Radcliffe New Road, Whitefield, Manchester, M45 7NR 13	
EN 15102:2007+A1:2011 Heavy duty wallcoverings	
Reaction to fire class	B-s3-d0 on plasterboard attached with an acrylic based adhesive
Release of formaldehyde	None
Release of other dangerous substances: - of heavy metals and specific elements - of vinyl chloride monomer (VCM)	<10mg/Kg <0.2mg/Kg
Sound absorption	NPD
Thermal resistance	NPD

Sustainability Credentials



Sustainability

Polyflor vinyl flooring provides a high performance, cost effective, low maintenance, long-life solution combined with excellent environmental credentials.

Life Cycle Analysis (LCA) is an important way to assess a product's entire environmental impact from start to finish. In third party LCAs including EN 15804 EPD, BRE Global, Ecospecifier and BASTA, Polyflor products perform excellently. Therefore specifying our flooring can help maximise points on a building's environmental assessment including BREEAM, Green Star and LEED®. LCAs are pivotal in providing transparent information and helping decision makers choose the most sustainable product available.

Materials

Our materials are responsibly sourced predominantly through local suppliers who are ISO 14001 certificated like Polyflor, or have a robust EMS. Vinyl is made up of 57% salt (chlorine) and 43% oil (ethylene). Polyflor's vinyl is made up mostly from natural and sustainable materials, this can be up to 85% - salt is one of the world's most abundant natural resources and calcium carbonate is used as filler. We do not use formaldehyde, lead, mercury, cadmium and hexavalent chromium - product is REACH compliant. We do not use non-compliant plasticisers and use a range of clean ortho-phthalate and non phthalate options.

Manufacturing & Logistics

Energy required per m² of material produced has fallen by 46% since 2000 and carbon emissions have decreased by 18,426 tonnes, due to ambitious ISO 14001 targets. It takes less energy to produce our vinyl than other plastics and at least 15% less energy than linoleum and 50% less than ceramics. Also with a typical 20-25 year life, fewer replacements are required.

Water use minimisation is important and on site rainwater is stored and used, saving a valuable, natural resource. 96% of the water used is recycled water, with just 4% coming from mains supply. Despite increasing sales volumes, wet and dry waste has been significantly reduced with the majority of waste we accrue, being recycled.

Polyflor efficiently distributes product globally through the transportation of full, bulk loads. Polyflor's fleet of HGVs are now more aerodynamic with euro 5 compliant engines for reduced fuel consumption and CO₂ emissions. Driving efficiencies and miles per gallon have also been improved, further reducing environmental impact. Additionally, vinyl flooring is much lighter than other flooring materials, which produces a positive outcome in transit, reducing fuel consumption.

Performance & Maintenance

Polyflor vinyl flooring is 100% fit for purpose, due to choice, use area, performance and durability without compromising on the environment. The in-use phase of the resilient flooring life-cycle accounts for at least 80% of its environmental impact. Therefore all of our ranges are designed with low maintenance features, whereby energy intensive cleaning is not required. PU, PUR and Polysafe PUR ranges are the easiest to clean, ensuring that use of water (55% less), polish (Polyflor PUR is polish free for life), strippers and detergents are significantly reduced. Specifiers prefer Polyflor products for their easy maintenance.

VOC emissions on our product ranges are all below industry standards with no negative contribution to indoor air quality. They have passed the most stringent, independent VOC emissions tests including AgBB/DiBT, Eurofins Indoor Air Comfort Gold, FloorScore® and GBCA/NZGBC Green Star IEQ-VOC.

End of Life

Vinyl is 100% recyclable and unlike many other materials, it can be recycled repeatedly without weakening or losing performance. Recycled content can be up to 40%, but on average is around 25% across many high volume ranges.

Polyflor is the largest vinyl flooring manufacturer in the UK, producing a wide range of products. In 2013, 9,570 tonnes of post production waste was recycled. Encouraging reclaim of post consumer waste is equally important to Polyflor and in 2013, 800 tonnes of vinyl waste was recycled back into new product. If it is not feasible to go back into new flooring due to contamination, vinyl is recycled into inferior quality PVC products, such as traffic cones.

BES 6001

"Responsible Sourcing of Construction Products is demonstrated through an ethos of supply chain management and product stewardship and encompasses social, economic and environmental dimensions."

BRE Global

All Polyflor production sites have been audited for BES 6001 (a complete sustainability standard from the BRE) achieving 'very good' certification for many of its products. BES 6001 is a framework standard for the responsible sourcing of construction products and sets out requirements under three main headings:

Organisational Management Supply Chain Management Environmental & Social Issues

To meet this standard and achieve a 'very good' rating, Polyflor has satisfied the compulsory sections as well as conforming to higher levels of compliance through seventeen principles of responsible sourcing.

The principles include:

- Ethics
- Legal Compliance
- Management Systems
- Supply Chain Management
- Stakeholder Engagement
- Complaints & Prosecutions
- Health & Safety
- Fundamental Rights at Work
- Climate Change & Energy
- Resource Use
- Site Stewardship
- Water
- Waste Management
- Transport Impacts
- Employment & Skills
- Local Communities
- Contribution to the Built Environment

A comprehensive report on Polyflor's sustainability can be found at www.polyflor.com/sustainability.



Flooring Collection

Homogeneous

2-3	Pearlazzo PUR	7	2000 PUR
4	Prestige PUR	8	XL PU
5	Mystique PUR	9	Standard XL
6	Classic Mystique PUR		

Semi Flexible Tiles

10	Polyflex Plus PU
----	------------------

Safety (Polysafe)

11	Corona PUR	21	Ultima
12	Astral PUR	22	Hydro
13	Vogue Ultra PUR	23	Hydro Evolve
14	Modena PUR	24	Wood fx Acoustix PUR
15	Arena PUR	25	Apex
16-17	Verona PUR	26	Ecomax
18	Mosaic PUR	48-49	Expona Control PUR
19	NEW Wood fx PUR		
20	Standard PUR		

Heterogeneous

27	Forest fx PUR	34-35	Secura PUR
28	Acoustix Forest fx PUR	36-37	NEW Designatex PUR
29	Acoustix Gallery fx PUR	38-41	Expona Flow PUR
30-33	Acoustix Harmony fx PUR		

Luxury Vinyl Tiles

42-45	Expona Commercial PUR	56-57	Camaro PUR
46-47	Expona Design PUR	58-59	Camaro Loc PU
48-49	Expona Control PUR	60-61	NEW Affinity 2 ⁵⁵ PUR
50-53	NEW Expona SimpLay PUR	62	Colonia PUR
54-55	Bevel Line PUR		

Vinyl Loc Tiles

58-59	Camaro Loc PU
-------	---------------

Loose Lay Tiles

50-53	NEW Expona SimpLay PUR
-------	------------------------

ESD

63	SD Collection
64	EC Collection

Wall Cladding

65	Polyclad Pro PU
65	Polyclad Plus PU

Sport

66	Polyflor Sport
----	----------------

Rubber Flooring

67	Diamant
68	Noppe Stud Tile

Flooring Accessories

69	Ejecta
----	--------

Product Specifications

70-81	
-------	--

Acoustic

24	Wood fx Acoustix PUR	30-33	Acoustix Harmony PUR
28	Acoustix Forest fx PUR	34-35	Secura PUR
29	Acoustix Gallery fx PUR	36-37	Designatex PUR



POLYFLOR™ INTERNATIONAL

Australia

Polyflor Australia
Tel: +61 3 9215 4400
Tel: 1800 777 425
E-mail: sales@polyflor.com.au

Canada

Polyflor Canada Inc.
Tel: +1 905 364 3000
E-mail: sales@polyflor.ca

China

Polyflor Hong Kong
Tel: +(852) 2865 0101
E-mail: info@polyflor.com.hk

France

James Halstead France SAS
Tel: +33 (0) 8 20 20 32 11
E-mail: info@jhfrance.fr

Germany

objectflor Art und Design Belags GmbH
Tel: +49 (0) 2236 966 330
E-mail: info@objectflor.de

India

Polyflor India Pvt Ltd
Tel: +91 22 4023 2485
E-mail: info@polyflor.co.in

Ireland

Polyflor Ireland
Tel: +353 (1) 864 9304
E-mail: salesireland@polyflor.com

New Zealand

Polyflor New Zealand
Tel: +64 9 269 1111
Tel: 0800 765 935
E-mail: sales@polyflor.co.nz

Norway

Polyflor Nordic
Tel: +47 23 00 84 00
E-mail: firmapost@polyflor.no

Poland

Polflor Sp. Z o.o.
Tel: +48 (0) 61 820 3155
E-mail: polyflor@polflor.com.pl

Russia

Polyflor Contract Ltd
Tel: +7 (812) 332 42 02
E-mail: info@polyflor.ru

South Africa

Poly Sales Africa (Pty.) Ltd
Tel: +27 11 609 3500
E-mail: info@polyflor.co.za

Sweden

FalckDesign AB
Tel: +46 (0) 300 15820
E-mail: info@falckdesign.com

www.polyflor.com



POLYFLOR™ HEAD OFFICE

POLYFLOR LTD. PO BOX 3 RADCLIFFE NEW ROAD WHITEFIELD MANCHESTER M45 7NR UK

UK SALES DIRECT: +44 (0)161 767 1122

UK SAMPLE REQUESTS: +44 (0)161 767 2551

EXPORT SALES DIRECT: +44 (0)161 767 1913

UK FAX: +44 (0)161 767 1128

EXPORT FAX: +44 (0)161 767 1166

TECHNICAL SUPPORT: +44 (0)161 767 1912

RECEPTION: +44 (0)161 767 1111

E-MAIL: INFO@POLYFLOR.COM

WEBSITE: WWW.POLYFLOR.COM

