


SPIT CC



Anchor for hollow base materials

Technical data

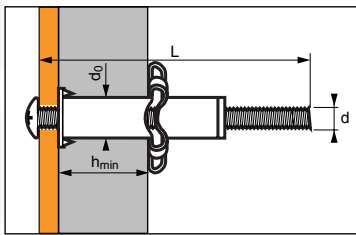

APPLICATION



- Fixing to plasterboard and hollow materials,
- Bathroom accessories,
- Pipework, trunking,
- Slotted screw head type PZ2.

TYPE	Ø thread (mm) d	Min-max base thickness (mm) h _{min}	Ø drill bit (mm) d _Ø	Total screw length (mm) L	Code	
					with fitted screw	without fitted screw
4-6/23	4	2-6	8	23	061030	-
4-13/33	4	4-13	8	33	061040	-
4-24/46	4	12-24	8	46	061050	-
5-14/34	5	6-14	8	34	061070	057800
5-16/45	5	3-16	8	45	061080	057810
5-32/59	5	14-32	8	59	061090	057820
6-13/34	6	6-13	10	34	061110	057830
6-16/46	6	4-16	10	46	061120	057840
6-30/59	6	16-30	10	59	061130	057850

Recommended and ultimate loads (kN)

TYPE	TENSILE		OBLIQUE		SHEAR		* indicative values					
	Hollow clay brick		Hollow concrete		Plasterboard		Hollow clay brick		Hollow concrete		Plasterboard	
	RJ 400	block B 40	10 mm	13 mm	RJ 400	block B 40	10 mm	13 mm	RJ 400	block B 40	10 mm	13 mm
	N _{rec} *	N _{u,m} *	N _{rec} *	N _{u,m} *	N _{u,m} *	N _{u,m} *	V _{rec} *	V _{u,m} *	V _{rec} *	V _{u,m} *	V _{u,m} *	V _{u,m} *
CC 4/12 - CC 4/24	0,18	1,1	0,23	2,3	0,6	0,7	0,36	2,2	0,38	1,4	1,0	1,35
CC 5/14 - CC 5/16 - CC 5/32	0,18	1,1	0,30	3,9	0,7	0,9	0,48	2,9	0,65	1,8	1,0	1,35
CC 6/12 - CC 6/16 - CC 6/30	0,18	1,1	0,30	4,4	0,7	0,9	0,48	2,9	0,73	1,8	1,0	1,35

SPIT DRIVA PLUS

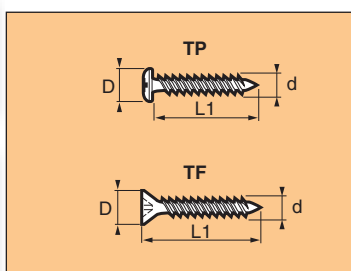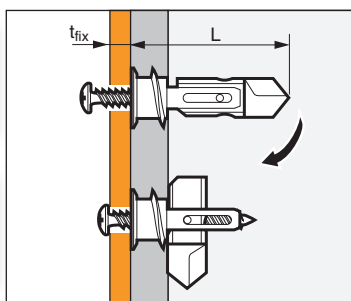

APPLICATION

- Self-drilling, double anchorage fixing for plasterboard: thickness 10 to 13 mm with or without insulation (polystyrene, etc...),
- Bathroom accessories
- Kitchen cabinets,
- Radiators, fuse boxes.

Special fixing for plasterboard: double anchorage

Technical data

TYPE	Max thick of part to be fixed	Ø thread	Ø anchor head	Ø screw head	Screw length	Total anchor length	CODE
	mm	mm	mm	mm	mm	mm	
	t _{fix}	d	-	D	L1	L	
TP 12	12	4,5	16	9,2	45	39	061190
TF 30	30	4,5	16	8,8	60	39	061200

Recommended and ultimate loads (kN)

TYPE	Plasterboard BA 10		Plasterboard BA 13	
	N _{rec}	N _{u,m}	N _{rec}	N _{u,m}
TP 12	0,084	0,42	0,12	0,60
TF 30	0,084	0,42	0,12	0,60
TYPE	Plasterboard BA 10		Plasterboard BA 13	
	V _{rec}	V _{u,m}	V _{rec}	V _{u,m}
TP 12	0,23	1,15	0,28	1,40
TF 30	0,23	1,15	0,28	1,40

MATERIAL

- Anchor body-zamak 3, NFA 55.010
- Special screw supplied, head type PZ2