

Staple type: S16 Staples  
 16 GAUGE STAPLES MEDIUM CROWN  
 Wire Ø: 1.53mm





### Suitable for the following tools\*:


Paslode S200 S16  
 3200/50 S16 PQ  
 4200/50 S16 PQ

*\*please check staple length compatibility with each tool before use*

Staple lengths available: 19mm – 63mm  
 Staples per strip: 70 - 75

### CORROSION PROTECTION

| Finish                                      | Usage Environment  | Label Colour on Packaging |
|---|--|---------------------------|
| Zinc Galv 1-3µm                             | INDOOR                                | Blue                      |
| Stainless Steel A4<br>AISI 316 / WNr 1.4401 | INDOOR, COVERED<br>OUTDOOR & OUTDOOR  | Yellow                    |

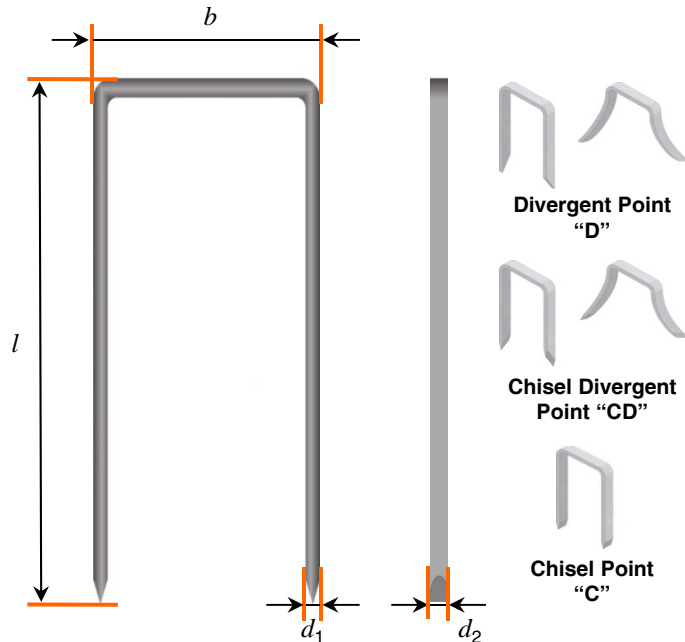

### STAPLE PROPERTIES / DIMENSIONS

|                                   |  |
|-----------------------------------|--|
| Tensile strength of wire:         | min 880 N/mm <sup>2</sup>  |
| Nominal diameter ( <i>d</i> ):    | 1.53mm   |
| Flattened wire dimension:         | ( <i>d</i> <sub>1</sub> ): 1.30mm<br>( <i>d</i> <sub>2</sub> ): 1.60mm |
| Outside crown width ( <i>b</i> ): | 13.00mm  |
| Strip length:                     | approx 120.00mm  |
| Standard point:                   | “C” / “D” / “CD”   |
| Coated leg length:                | “C” = Full<br>“D” & “CD” = Partial                                     |

### STAPLE LENGTHS AVAILABLE\*

| Finish                                      | Lengths Available<br><small>*Other lengths on request</small>  |
|---|--|
| Zinc Galv 1-3µm                             | ‘C’ Point: 19mm, 25mm, 28mm, 32mm, 35mm<br>38mm, 41mm, 45mm, 51mm, 63mm<br>‘D’ Point: 19mm, 25mm, 38mm<br>‘CD’ Point: 22mm, 32mm, 44mm |
| Stainless Steel A4<br>AISI 316 / WNr 1.4401 | 38mm, 50mm   |

Paslode is a brand of the ITW Group. ITW reserves the right to change specification without notice. All design using this data should be carried out by a qualified structural engineer, subject to relevant National and European standards or regulations.