

ENVIRONMENTAL PRODUCT DECLARATION



ISO 14025 ISO 21930 EN 15804

Owner of the declaration	European Waterproofing Association AISBL
Publisher	The Norwegian EPD Foundation
Declaration number	NEPD00271E
Issue date	22.09.2014
Valid to	22.09.2019

Single layer fully torched modified bitumen roof waterproofing system

Product

European Waterproofing Association AISBL

Owner of the declaration



General information

Product

Single layer fully torched modified bitumen roof waterproofing system

Program holder

The Norwegian EPD Foundation
 Post Box 5250 Majorstuen, 0303 Oslo
 Phone: +47 23 08 80 00
 e-mail: post@epd-norge.no

Declaration number:

NEPD00271E

This declaration is based on Product Category Rules:

CEN Standard EN 15804 serve as core PCR
 EPD NORGE Roof Waterproofing NPCR 00022rev1
 December 2012

Declared unit:

1 m² (single layer) polyester-glass reinforced modified bitumen roof waterproofing membrane for fully torch application

Declared unit with option:

Functional unit:

1 m² single layer fully torched modified bitumen roof waterproofing system with a service life time of 60 years (including installation and refurbishment after 30 years)

The EPD has been worked out by:

Life Cycle Engineering
 Via Livorno, 60
 10144, Torino (Italy)



Together with BWA

Verification:

Independent verification of data, other environmental information and EPD has been carried out in accordance with ISO14025, 8.1.3 and 8.1.4

externally internally

Helene Sedal

Helene Sedal

(Independent verifier approved by EPD Norway)

Owner of the declaration

European Waterproofing Association AISBL
 Contact person: Sabine Hasinger
 Phone: +49 (0) 69 2556 1315
 e-mail: sabine.hasinger@ewa-europe.com

Manufacturer

The BWA members listed on page 6

Place of production:

Production locations in Belgium, Denmark, Finland, Germany, Italy, Netherlands and Sweden (see participants on page 6).

Management system:

Not applicable for association. Most production locations do have an ISO 14001 certificate

VAT

BE 0597.802.387

Issue date

22.09.2014

Valid to

22.09.2019

Comparability:

EPD of construction products may not be comparable if they not comply with EN 15804 and seen in a building context.

Year of study:

2010-2012

Approved

Dagfinn Malnes

Dagfinn Malnes
 Managing Director of EPD-Norway

Declared unit:

1 m² (single layer) polyester-glass reinforced modified bitumen roof waterproofing membrane for fully torch application

Key environmental indicators	Unit	Cradle to gate A1 - A3	Transport A4
Global warming	kg CO ₂ -eqv	3,68	4,49E-01
Energy use	MJ	6,74E+01	6,43E+00
Dangerous substances	*	-	-

* The product contains no substances from the REACH Candidate list or the Norwegian priority list

***** Transport from production site to central warehouse in Norway

Product

Product description:

Modified bitumen sheet with polyester/glass reinforcement with an average thickness of 4.3 mm (5,4 kg/m²). Intended use: fully bonded by torched in a single layer application.

Technical data:

Average of commonly in Europe used plastomeric/elastomeric bitumen sheets which complies with the local national requirements. Average taken of plastomeric/elastomeric bitumen sheets commonly used in Europe and complying with local national requirements. The participating production locations gave data for the most important product produced for this intended use. Following an mathematical average was made per group of countries (cluster) producing similar products. Based on an

Product specification

The main materials that are required for the production of an average membrane are listed in the table below.

Materials		%
Bitumen		50
Filler (e.g. limestone)		20,1
Polymers (SBS, PP, etc.)		7,4
Reinforcement (PET + glass)		4
Mineral surfacing		7,4
Other		11,1

Market:

Europe

Reference service life:

60 years

LCA: Calculation rules

Functional unit:

1 m² single layer fully torched modified bitumen roof waterproofing system with a service life time of 60 years (including installation and refurbishment after 30 years)

System boundary:

The processes belonging to the analyzed system were organized according to the following three phases:

Upstream process

Include all impacts due to the production of raw materials, such as bitumen and polymers as well as recycled materials and transport to the production site.


Core process

Include all burden of the membrane production, such as energy, direct air and water emissions. Impacts of waste delivered to final disposal are considered as well.

Downstream process

Include transportation to the roof location, the installation of the roofing membranes and the reroofing phase. The end of life treatment of the membranes and the ancillary installation products are also included.

In the figure below the modules according EN 15804 which are included in the analyzed system are visualized.

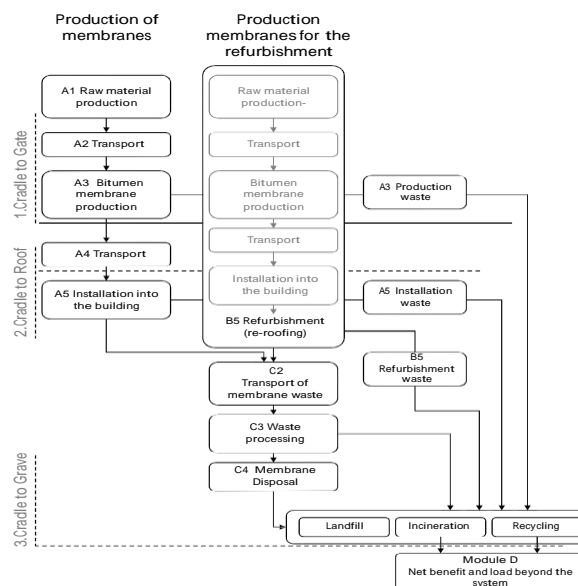

Data quality:

Production locations data year 2010 from 42 European production locations. For the main raw materials the most recent sector information was used. For bitumen, which is the main component, the Eurobitume Life Cycle Inventory (LCI) 2011 (see www.eurobitume.eu). For plastics, Plastics Europe LCI studies were used as reference data. In some other cases already available EPDs were used (e.g. specific polyester fleece EPD 2011). Other data came from the Eco invent database (2011). The European electricity mix was used as reference data for all production plants. No primary data was directly collected from the raw material suppliers.

Allocation:

The allocation is made in accordance with the provisions of EN 15804. Incoming energy and water and waste production in-house production is allocated equally among all products through mass allocation. Effects of primary production of recycled materials allocated to the main product in which the material was used. The recycling process and transportation of the material is allocated to this analysis.

Cut-off criteria:

All major raw materials and all the essential energy is included. The production process for raw materials and energy flows that are included with very small amounts (<1%) are not included. This cut-off rule does not apply for hazardous materials and substances.

LCA: Scenarios and additional technical information

The following information describe the scenarios in the different modules of the EPD.

Transport from production place to user (A4)

Type	Capacity utilisation (incl. return) %	Type of vehicle	Distance km	Fuel/Energy	Value
Truck	85 %	16-32 ton, Euro 3	500	l/tkm	

The average transport distance from the participating production locations to central warehouse in Norway is 800 km.

Installation in the building (A5)

	Unit	Value
Auxiliary	kg	
Water consumption	m ³	
Electricity consumption	kWh	
Other energy carriers	kg/m ²	0,2
Material loss	%	12 %
Output materials from waste treatment	kg	
Dust in the air	kg	

The sheets are installed fully adhered on the surface by a gas propane torch using 0,2 kg/m². To compensate installation losses and material needed for joints the membrane consumption is increased with 12 %.

Replacement (B4)/Refurbishment (B5)

	Unit	Value
Replacement cycle*	RSL	30
Electricity consumption	kWh	
Replacement of worn parts		
Other energy carriers	kg/m ²	0,2
Material loss	%	12

* The maintenance interval is 30 year. The refurbishment process consists the application of a new top layer which is fully bonded on the existing roofing system by torch.

End of Life (C1, C3, C4)

	Unit	Value
Hazardous waste disposed	kg	
Collected as mixed construction waste	kg	
Reuse	kg	
Recycling	%	8
Energy recovery	kg	
To landfill	%	68
To incineration without energy recovery	%	24

The environmental burden due to waste disposal of the membranes is calculated based on an average scenario which represents the current European situation. The average scenario is 68% to landfill, 24% to incineration (without energy recovery) and 8% to recycling. Compared to the Norwegian situation this can be regarded as a worst case scenario.



Transport to waste processing (C2)

Type	Capacity utilisation (incl. return) %	Type of vehicle	Distance km	Fuel/Energy	Value
Truck	50 %	16-32 ton	50	l/tkm	

Transport to waste treatment: For the transportation of roofing material waste to waste treatment with a truck (16-32 ton) for the standard transport distance of 50 km.

For waste processing for recycling: for collection of waste fractions the standard transport distance of 50 km is considered (distance between building site to waste sorting facility). For the waste processing only the electricity consumption of waste sorting facilities has been considered.

Benefits and loads beyond the system boundaries (D)

	Unit	Value
Global warming potential	kg CO ₂ -Eqv	-2,9849
Energy use	MJ	-105,78

LCA: Results

The environmental burden has been calculated by means of the 24 indicators according to EN 15804 requirements.

System boundaries (X=included, MND=module not declared, MNR=module not relevant)

Product stage			Construction installation stage		Use stage							End of life stage				Beyond the system boundaries
Raw materials	Transport	Manufacturing	Transport	Construction installation stage	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De-construction demolition	Transport	Waste processing	Disposal	Reuse-Recovery-Recycling-potential
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
x	x	x	x	x	MND	MND	MND	MNR	x	MNR	MNR	MND	x	x	x	x

Environmental impact

Parameter	Unit	A1-A3	A4	A5	B5	C2	C3	C4	D
GWP	kg CO ₂ -eqv	3,68E+00	2,81E-01	9,81E-01	4,82E+00	7,48E-02	9,41E-02	7,30E+00	-2,98E+00
ODP	kg CFC11-eqv	1,72E-07	4,22E-08	1,05E-07	2,99E-07	9,83E-09	2,30E-09	2,92E-08	-3,93E-07
POCP	kg C ₂ H ₄ -eqv	3,24E-03	1,86E-04	7,18E-04	4,06E-03	4,29E-05	4,52E-05	4,34E-04	-1,16E-03
AP	kg SO ₂ -eqv	1,48E-02	1,32E-03	3,05E-03	1,85E-02	1,85E-04	3,29E-04	2,11E-03	-7,24E-03
EP	kg PO ₄ ³⁻ -eqv	2,05E-03	3,05E-04	3,73E-03	5,90E-03	4,03E-05	1,80E-04	5,89E-02	-4,00E-03
ADPM	kg Sb-eqv	1,60E-05	1,77E-10	1,93E-06	1,79E-05	1,44E-10	6,09E-09	2,65E-07	-2,35E-08
ADPE	MJ	2,00E+02	3,98E+00	3,51E+01	2,37E+02	1,06E+00	1,24E+00	3,23E+00	-9,23E+01

GWP Global warming potential; **ODP** Depletion potential of the stratospheric ozone layer; **POCP** Formation potential of tropospheric photochemical oxidants; **AP** Acidification potential of land and water; **EP** Eutrophication potential; **ADPM** Abiotic depletion potential for non fossil resources; **ADPE** Abiotic depletion potential for fossil resources

Resource use

Parameter	Unit	A1-A3	A4	A5	B5	C2	C3	C4	D
RPEE	MJ	8,71E+00	5,67E-03	1,06E+00	9,77E+00	1,51E-03	8,20E-02	8,74E-02	-2,67E+00
RPEM	MJ	2,67E-01	0	3,20E-02	2,99E-01	0	0	0	0
TPE	MJ	8,98E+00	5,67E-03	1,10E+00	1,01E+01	1,51E-03	8,20E-02	8,74E-02	-2,67E+00
NRPE	MJ	5,85E+01	4,01E+00	1,83E+01	7,92E+01	1,07E+00	1,59E+00	3,69E+00	-1,03E+02
NRPM	MJ	1,55E+02	0,00E+00	1,85E+01	1,73E+02	0	0	0	0
TRPE	MJ	2,13E+02	4,01E+00	3,67E+01	2,52E+02	1,07E+00	1,59E+00	3,69E+00	-1,03E+02
SM	kg	1,64E-01	0	1,97E-02	1,84E-01	0	0	0	0
RSF	MJ								
NRSF	MJ								
W	m ³	1,13E+00	1,65E-02	1,36E-01	1,26E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00



RPEE Renewable primary energy resources used as energy carrier; **RPEM** Renewable primary energy resources used as raw materials; **TPE** Total use of renewable primary energy resources; **NRPE** Non renewable primary energy resources used as energy carrier; **NRPM** Non renewable primary energy resources used as materials; **TRPE** Total use of non renewable primary energy resources; **SM** Use of secondary materials; **RSF** Use of renewable secondary fuels; **NRSF** Use of non renewable secondary fuels; **W** Use of net fresh water

End of life - Waste

Parameter	Unit	A1-A3	A4	A5	B5	C2	C3	C4	D
HW	kg	1,99E-02	3,05E-05	2,39E-03	2,24E-02	0	0	0	-5,77E-05
NHW	kg	2,55E-01	3,05E-05	4,83E-01	7,38E-01	0	1,74E-03	8,02E+00	-9,35E-04
RW	kg	3,81E-04	1,04E-06	4,58E-05	4,28E-04	0	1,35E-08	0	0

HW Hazardous waste disposed; **NHW** Non hazardous waste disposed; **RW** Radioactive waste disposed

End of life - Output flow

Parameter	Unit	A1-A3	A4	A5	B5	C2	C3	C4	D
CR	kg	NA	NA	NA	NA	NA	NA	NA	NA
MR	kg	1,98E-02		4,89E-02				8,17E-02	
MER	kg	2,52E-02		1,53E-01				2,56E+00	
EEE	MJ	NR	NR	NR	NR	NR	NR	NR	NR
ETE	MJ	NR	NR	NR	NR	NR	NR	NR	NR

CR Components for reuse; **MR** Materials for recycling; **MER** Materials for energy recovery; **EEE** Exported electric energy; **ETE** Exported thermal energy

Reading example: 9,0 E-03 = $9,0 \cdot 10^{-3}$ = 0,009

List of participants *)

Country	Production location	Country	Production location
Belgium	ATAB - Antwerp De Boer -	Italy	Copernit - pegognaga
	Antwerp Derbigum/Imperbel -		Imper - Mappano
	Perwez Soprema -		Index - Castel D'azzano
Denmark	Grobbendonk	Netherlands	Polyglass - Ponte Piave
	Icopal Denmark - Ikast		Pluvitec - Ronco all'Adige
	Nordic Waterproofing - Vejen		Icopal BV - Groningen
Finland	Katepal - Lempäälä	Sweden	Troelstra & de Vries - Ijlst
	Nordic Waterproofing - Lohja		Icopal - Malmö
Germany	Paul Bauder - Achim		Nordic Waterproofing - Höganäs

*) Not all the 42 production locations participating in the BWA LCA-project are listed. Only the production locations which participated in the additional EPD Norge project are listed.

Additional Norwegian requirements

Electricity

The European electricity mix was used as reference data for each production plant.

Greenhouse gas emissions: 0,15 kg CO₂ - eqv/MJ

Dangerous substances

None of the following substances have been added to the product: Substances on the REACH Candidate list of substances of very high concern (of 16.06.14) or substances on the Norwegian Priority list (of 12.09.13) or substances that lead to the product being classified as hazardous waste. The chemical content of the product complies with regulatory levels as given in the Norwegian Product Regulations.

Transport




Transport from production site to central warehouse in Norway is: 800 km

Carbon footprint

Carbon footprint has not been worked out for the product.

Bibliography

ISO 14025:2006	Environmental labels and declarations - Type III environmental declarations - Principles and procedures
ISO 14044:2006	Environmental management - Life cycle assessment - Requirements and guidelines
EN 15804:2012	Sustainability of construction works - Environmental product declaration - Core rules for the product category of construction products
ISO 21930:2007	Sustainability in building construction - Environmental declaration of building products
LCE, Turin 17-09-2012	BWA: 2010-2012 LCA PROJECT for EPD purposes
PCR	NPCR 22 PCR for preparing an EPD for product group Roof waterproofing
Envirodec	BWA Environmental product Declaration for Bitumen Roof Waterproofing Systems S-EP-00414 rev. 1.1

 epd-norge.no The Norwegian EPD Foundation	Program holder and publisher The Norwegian EPD Foundation Post Box 5250 Majorstuen, 0303 Oslo Norway	Phone: +47 23 08 80 00 e-mail: post@epd-norge.no web: www.epd-norge.no
	Owner of the declaration European Waterproofing Association AISBL Boulevard du Souverain 68, Vorstlaan 68 B 1170 Brussels, Belgium	Phone: +49 (0) 69 2556 1315 Fax: +49 (0) 69 2556 1602 e-mail: info@ewa-europe.com web: www.ewa-europe.com
	Author of the Life Cycle Assessment Life Cycle Engineering Via Livorno, 60 10144, Torino (Italy)	Phone: 0039 0112257311 Fax: 0039 0112257319 e-mail: info@lcengineering.eu web: www.lcengineering.eu