


# Nordic XL Pro TECHNICAL DATASHEET

MADE IN BELGIUM

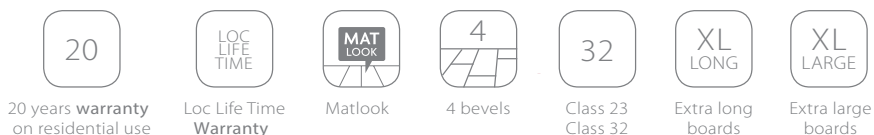

# Nordic XL PRO

## PRODUCT DESCRIPTION

Dimensions	2038 L x 241 W x 8 TH mm
Packaging	Box: 6 boards - 2,95 m <sup>2</sup> (20,7 kg) Pallet: 54 boxes - 159,14 m <sup>2</sup> (1159 kg)
Composition	Paper impregnated with melamine resin
> surface layer	Moisture-resistant High Density Fibreboard, HDF
> Substrate	Paper impregnated with melamine resin
> Backing	
Features	Matlook, 4 bevels, X-Long, X-Large
Installation	5G Loc under licence of Välinge Innovation AB
Installation instructions	See box inlay or <a href="http://www.berryalloc.com">www.berryalloc.com</a>

## REQUIREMENTS

General requirements	According EN13329
Classification requirements	Class 23/32

## CHARACTERISTICS

CHARACTERISTICS	METHOD	TEST RESULTS
Abrasion resistance	EN 13329	AC4 (IP $\geq$ 4.000)
Impact resistance	EN 13329	Small ball $\geq$ 12N - Big ball $\geq$ 750mm
Resistance to staining	EN 438	5 (groups 1 + 2); 4 (group 3)
Resistance to cigarette burns	EN 438	4
Effect of a furniture leg	EN 424	No damage (foot type 0)
Effect of a castor chair	EN 425	No change in appearance or damage
Thickness swelling	EN 13329	$\leq$ 18%

## CE - CLASSIFICATION ACCORDING EN14041

Fire resistance	C <sub>f</sub> -S1
Formaldehyde	E1
Slipperiness	DS

## OTHER TECHNICAL DATA

Labelling according to French VOC emission regulation	A+
Floor heating/cooling	See specific instructions on <a href="http://www.berryalloc.com">www.berryalloc.com</a>
Thermal resistance in combination with underlay Excellence Plus	0,08 m <sup>2</sup> K/W

## WARRANTY AND MAINTENANCE

Residential warranty	20 years
Warranty conditions	See <a href="http://www.berryalloc.com">www.berryalloc.com</a>
Care and maintenance	See <a href="http://www.berryalloc.com">www.berryalloc.com</a>