



MIPOLAM TROPLAN

gerflor.com



Gerflor[®]
theflooringgroup

MIPOLAM TROPLAN

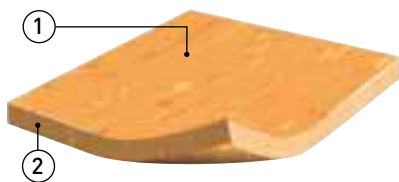

- ① evercare™ treatment
- ② Compacted, calendered floorcovering

- ▶ High performing flexible homogeneous multipurpose flooring.
- ▶ Available in tiles or sheets.
- ▶ Directional design.
- ▶ Incorporates a bacteriostatic and fungistatic treatment.



Patented Gerflor Technology

- ▶ Obtained by UV laser cross-linking

High Performance

- ▶ Durability & Resistance

Easy maintenance

- ▶ No wax for life

Low Environmental Impact

- ▶ Saves water and detergent



1010 Grey
WR: 0585 0644
NCS: 3502-R / LRV: 45,6



1059 Blue Grey
WR: 0585 0586
NCS: 5005-R80B / LRV: 27,2



1040 Dark Grey
WR: 0585 0337
NCS: 5502-R / LRV: 29,5

INSTALLATION

Laying is the responsibility of the installer. Installation should be made in accordance with installation guidelines supplied and regularly updated by Gerflor's Technical Department. Installation should be carried out in accordance with local standards. Subfloor to be smooth, hard, clean and dry prior to laying. Where applicable the subfloor must incorporate an effective Damp Proof Membrane. The material must be allowed to acclimatise 24 hours prior to installation in a room temperature of between 18-24°C. All seams must be heat welded using Gerflor matching weld rod.

MAINTENANCE

Maintenance should be carried out regularly to retain the appearance and durability of the floor. The floor covering should be maintained with regular sweeping and damp mopping using a neutral cleaner, or auto scrubber machine with an appropriate pad.

⚠ Rubber leaves indelible stains on vinyl floorings: do not use mats with rubber backing and replace tubular furniture feet with those made of PVC or polyamide. Place mats of sufficient length at entrances to reduce outside sources of dirt.

Further installation and maintenance instructions are available from Gerflor.



1032 Yellow
WR: 0585 2131
NCS: 2040-Y30R / LRV: 39,4



1055 Apricot
WR: 0585 0646
NCS: 3050-Y70R / LRV: 20,3



1060 Anthracite
WR: 0585 0330
NCS: 6502-R / LRV: 20,1

MIPOLAM TROPLAN



1003 Light Ocre
WR: 0585 0630
NCS: 1010-Y30R / LRV: 57,9



1002 Beige
WR: 0585 0624
NCS: 1005-Y50R / LRV: 63,9



1009 Light Grey
WR: 0585 0673
NCS: 2000-N / LRV: 57,8



1035 Ocre
WR: 0585 0625
NCS: 2020-Y30R / LRV: 48,2



1007 Green
WR: 0585 0604
NCS: 2010-G30Y / LRV: 46,3




1006 Blue
WR: 0585 0216
NCS: 2020-R80B / LRV: 46,1



1004 Earth
WR: 0585 0473
NCS: 2005-Y50R / LRV: 50,4




1037 Medium Green
WR: 0585 2944
NCS: 2030-B90G / LRV: 34,4

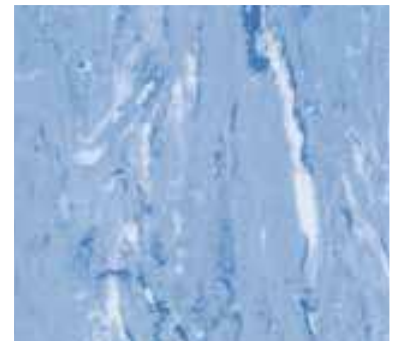

1036 Medium Blue
WR: 0585 0011
NCS: 2030-R80B / LRV: 36,5



1033 Brown
WR: 0585 0645
NCS: 3005-Y50R / LRV: 38,1

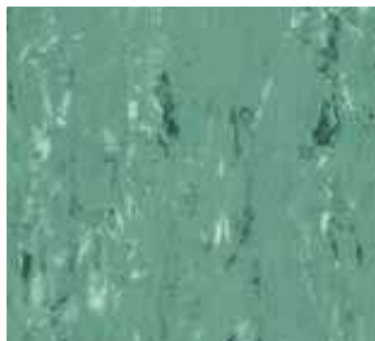

1057 Dark Green
WR: 0585 2945
NCS: 4020-B90G / LRV: 28,9



1056 Dark Blue
WR: 0585 0802
NCS: 3040-R80B / LRV: 21,1

DESCRIPTION / *BESCHREIBUNG* / DESCRIPTION / *BESCHRIJVING* / DESCRIPCIÓN / *DESCRIÇÃO* / DESCRIZIONE

Mipolam Troplan

Total thickness / <i>Gesamtdicke</i> / Epaisseur totale / <i>Totale dikte</i> / Espesor total / <i>Essessura total</i> / Spessore totale	EN 428	mm	2.00
	ASTM F386-02	inch	0.08
Weight / <i>Flächengewicht</i> / Poids / <i>Gewicht</i> / Peso / <i>Peso</i> / Peso	EN 430	g/sq.m	3300
Width/length of sheet / <i>Bahnenbreite/-länge</i> / Largeur/longueur des lés / <i>Rolbreedte/Rollengte</i> / Ancho/largo de rollos / <i>Largura/comprimento dos rolos</i> / Larghezza/lunghezza dei teli	EN 426	cm/lm	200 / 20
	-	feet - inch	6'6" / 66'
Coverage / roll	-	sq.ft	430.56
	-	sq.m	40
Tile size / <i>Format Fliesen</i> / Format dalles / <i>Formaat der tegels</i> / Dimensiones de las losetas / <i>Dimensões dos mosaicos</i> / Dimensione delle piastre	EN 427	mm	608x608
Number of tiles per package / <i>Fliesen-Anzahl</i> / Nombre de dalles par boîte / <i>Aantal tegels per doos</i> / Cantidad de losetas/caja / <i>Quantidade dos mosaicos/caixa</i> / N° piastre per confezione	-	-	20

CLASSIFICATION / *KLASSIFIZIERUNG* / CLASSIFICATION / *CLASSIFICATIE* / CLASIFICACIONES / *CLASSIFICAÇÕES* / CLASSIFICAZIONI

Norm/product specification / <i>Produkt Norm</i> / Norme produit / <i>Technische eigenschappen</i> / Normas / <i>Normas</i> / Norma prodotto	-	-	EN 649
	ASTM F 1913-04	-	compliant
European classification / <i>Europäische Klassifizierung</i> / Classement européen / <i>Europese classificatie</i> / Europea / <i>Europa</i> / Europea	EN 685	class	34-43
Classement UPEEC	NF 189	classement	U4P3E2/3C2
Certification NF UPEEC	NF 189	n° certifiact	332-001.1
K rating / <i>Beanspruchungsklasse</i> / Classement K / <i>K classificatie</i> / Clasificación K / <i>Classificação K</i> / Classificazione K	-	class	K5
	EN 13501-1	class	Bfl - s1
Fire rating / <i>Brandverhalten</i> / Classement feu / <i>Brand classificatie</i> / Fuego / <i>Fogo</i> / Reazione al fuoco	ASTM E648-08	class	Class I
	CAN/ULC S102.2	-	-
	DIN 51 130 / BGR 181	class	R9
Slip resistance wet / <i>Glissance humide</i> / Anti-slip / <i>Deslizamiento húmedo</i> / Escorregamento húmido / <i>Scivolosità umida</i>	EN 1815	kV	< 2

PERFORMANCE / *TECHNISCHE EIGENSCHAFTEN* / PERFORMANCES / *TESTRESULTAAT* / CUALIDADES TÉCNICAS / *PERFORMANCES* / CARATTERISTICHE TECNICHE

Wear resistance / <i>Verschleißverhalten</i> / Résistance à l'usure / <i>Slijtvastheid</i> / Abrasión / <i>Abrasão</i> / Resistenza all'abrasione	EN 660.2	mm ³	≤ 7.5
Wear group / <i>Verschleißgruppe</i> / Groupe d'abrasion / <i>Groep slijtvastheid</i> / Grupo de abrasión / <i>Grupo de abrasão</i> / Gruppo di abrasione	EN 649	group	M
Type binder content / <i>Teneur en agent liant</i>	ISO 10581	Type	II
Dimensional stability / <i>Maßstabilität</i> / Stabilité dimensionnelle / <i>Maatvastheid</i> / Estabilidad dimensional / <i>Estabilidade dimensional</i> / Stabilità dimensionale	EN 434	%	≤ 0.40
Residual indentation / <i>Resteindruck</i> / Poinçonnement statique rémanent / <i>Indrukbelasting</i> / Punzonamiento / <i>Punçamento</i> / Impronta	EN 433	mm	≈ 0.03
Thermal conductivity / <i>Wärmeleitfähigkeit</i> / Conductivité thermique / <i>Thermische weerstand</i> / Resistencia térmica / <i>Resistência térmica</i> / Resistenza termica	EN 12 524	W/(m.K)	0.25
Colour fastness / <i>Lichtechtheit</i> / Solidité lumière / <i>Lichtechtheid</i> / Resistencia a la luz / <i>Estabilidade das cores</i> / Solidità alla luce	EN 20 105 B02	degree	≥ 6
Castor chair test / <i>Stuhlrollenbeanspruchung</i> / Essai de la chaise à roulettes / <i>Rolweerstand bureaustoelen</i> / Determinación del efecto de una silla con ruedas / <i>Resistência a cadeiras de rodas</i> / Resistenza al passaggio di sedie con rotelle (Type W / Typ W)	EN 425	-	OK
Dekontaminierbarkeit	DIN 25415-1 / ISO 8690	-	Sehr gut
Chemical resistance / <i>Verhalten gegenüber Chemikalien</i> / Résistance aux produits chimiques / <i>Chemische bestendigheid</i> / Resistencia a los productos químicos / <i>Resistência aos produtos químicos</i> / Resistenza ai prodotti chimici	EN 423	class	OK <i>beständig gegenüber nicht färbenden alkoholhaltigen Handdesinfektionsmitteln, Haushaltschemikalien und verdünnten Säuren und Laugen bei kurzzeitiger Einwirkung</i>
Fungistatic and bacteriostatic treatment / <i>Fungistatisch und bakteriostatisch</i> / Fongistatique et bactériostatique / <i>Bacteriologisch en schimmelwerend</i> / Bacteriostático y fungistático / <i>Bacteriostático e fungistático</i> / Batteriostatico e micostático	-	-	OK
Surface treatment / <i>Oberflächenvergütung</i> / Traitement de surface / <i>Oppervlaktebehandeling</i> / Tratamiento de superficie / <i>Tratamento de superficie</i> / Trattamento di superficie	-	-	Evercare™
TVOC after 28 days / <i>TVOC (28 Tage)</i> / TVOC (28 jours) / <i>TVOC (28 dagen)</i> / TVOC (28 dias) / <i>TVOC (28 dias)</i> / TVOC (28 giorni)	ISO 16000-6	µg/m ³	< 10

CE marking / *CE Kennzeichnung* / Marquage CE / *EG-conformiteitsmerk* / Marca de conformidad CE / *Marca de conformidade CE* / Marcatura CE di conformità

CE	EN 14041	-	
		-	

Environmental Profiles Scheme
Certificate Number ENP 359
BRE 'A' Rated Green Guide Product

Written terms & conditions of warranty available on request

Gerflor Don't forget our complementary ranges!

Handrails Wall Coverings & Protections Entrance mats Skirtings & Profiles

and Be CONNECTED!

www.gerflor.com

Health & Safety ISO 14001 Recycling Life Cycle Analysis

Committed to sustainable development

Création : misterBrown - Illustrations : J.P.E. - Réalisation : coco & co - Mipolam Troplan - 04/2013