


Tekniske data



Total tykkelse	EN 428	mm	2.9
Tykkelse slitesjikt	EN 429	mm	0.30
Vekt	EN 430	g/m ²	2170
Bredde	EN 426	m	2 / 3 / 4
Lengde	EN 426	lm	± 25
Overflate	-	-	Pureclean
Europa klasse	EN 685	klasse	23 - 31
Brannklassifisering	EN 13501-1	klasse	Cfl-s1
Slitasjegruppe	EN 653	gruppe	T
Trinnlydsreduksjon	EN ISO 717/2	dB	16
Trinnlydsdemping	NF S 31074	klasse	A
Friksjon, våt	DIN 51 130	klasse	R10
Dimensjonsstabilitet	EN 434	%	0.05
Inntrykksfasthet	EN 433	mm	0.20
Termisk resistens	EN 12 524	W/(m.k)	0.25
Fargebestandighet	EN 20 105 - B02	skala	> 6
Garanti		år	15

CE MERKING

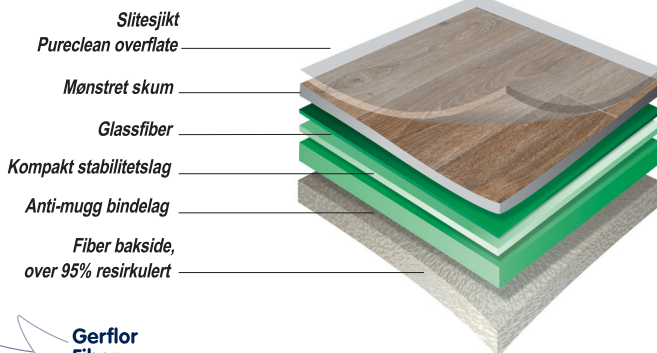

EN 14041



Bruksområder:

