# **Eclipse Premium**



HOMOGENEOUS FLOORCOVERING

VINYL




- > Harmonised colour range
- > Classic non-directional design
- > PUR reinforced Easy low-cost maintenance
- > Favourable initial cost
- > No additional surface treatment needed







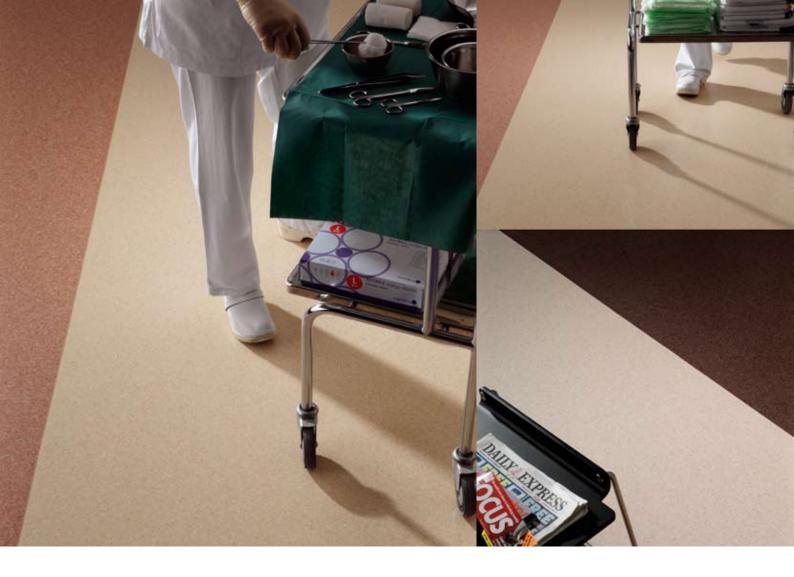

## A dependable flooring solution

Eclipse Premium is a homogeneous, high-quality vinyl flooring suitable for most types of premises such as schools, health care facilities and other types of public buildings. Eclipse Premium is PUR reinforced and needs no wax and no polish – for life.

Compared with all the other PUR-reinforced vinyl floorings on the market, Eclipse Premium is a very good choice due to its high-quality properties and competitive price.

### PUR treatment for an excellent life cycle cost

With Eclipse Premium you get a hardwearing vinyl flooring with a harmonious design, balanced raw material content and good maintenance properties. Eclipse Premium needs no additional surface treatment such as polish or wax when exposed to normal wear and tear. This will have a beneficial effect on the life cycle cost.

### Maintenance costs are crucial

Calculations show that the initial cost of buying and installing flooring is about 8% of the total cost over

the flooring's service life of at least 20 years. That means cleaning and maintenance represent as much as 92% of the total cost. Cleaning and maintenance costs are the largest item of expenditure in property management, and therefore very important for overall economy. However, they are often overlooked in initial budgets. Analysing and providing the best conditions for the efficient care and maintenance of floors pays dividends. Choosing the right flooring, with the right cleaning properties, is therefore crucial for obtaining a good life cycle cost.

### What pays in the long term?

A complete analysis of the total life cycle cost for different vinyl floorings shows that a low-price floor covering, which requires regular treatment with polish, proves to be the most expensive choice over time. Eclipse Premium from Tarkett offers a perfect compromise if you have a limited initial budget and still want PUR reinforced, high-quality function and an excellent life cycle cost.





### **Tarkett Environmental Intelligence**

We see our Intelligent Flooring Solutions as part of the world's ecological system – and make strong efforts to secure that all our activities are based on respect for the environment. All our flooring products are developed, produced and handled with a great concern for sustainability and environment. We call it Environmental Intelligence and live by this principle in every single step, from vision to waste.



### Environmental Intelligence in our vinyl flooring

Tarkett introduced the first vinyl flooring more than 60 years ago, and environmental sustainability has always been in focus for us.

- 100% recyclable
- Low energy consumption
- Easy and lowest maintenance cost ever
- Low emissions
- Long life cycle avoiding short-term replacement and minimizing old installation waste

# The Eclipse Premium range



# Colours with contrasts in harmony

3440 065 3441 065

The Eclipse Premium colour range includes 22 colours, which are harmonised to give perfectly balanced in the contrasts. The non-directional pattern is very classic and versatile, offering great possibilities for creating attractive interior designs.

3440 007 3441 007























#### DESCRIPTION

Eclipse Premium is a homogeneous, high-quality vinyl flooring suitable for most types of premises such as schools, healthcare facilities and other types of public buildings. Eclipse Premium needs no additional surface treatment such as polish or wax when exposed to normal wear and tear. This will have a beneficial effect on the life cycle cost. The Eclipse Premium range includes 22 harmonious colours.

Technical data		Eclipse Premium	
Type of flooring	EN 649	Homogeneous vinyl flooring	
CE certification		Yes	
Classification	EN 685	Commercial: 34	
		Industrial: 43	
Wear layer thickness	EN 429	2.0 mm	
Surface treatment		PUR reinforced	
Total thickness	EN 428	2.0 mm	
Total weight/m²	EN 430	3150 g	
Dimensional stability	EN 434	≤ 0.40% for rolls	
		≤ 0.25% for tiles	
Abrasion			
Thickness loss	EN 660: Part 1	Group P: ≤ 0.15 mm	
Volume loss	EN 660: Part 2	Group P: ≤ 4.00 mm <sup>3</sup>	
Residual indentation	EN 433	Approx. 0.06 mm	
Castor chair test	EN 425	Suitable	
Static electrical charge	EN 1815	< 2 kV	
Underfloor heating		Suitable – max. 27° C	
Flexibility	EN 435	OK	
Impact sound resistance	EN ISO 717/2	Approx. + 4 dB	
Thermal resistance	EN 12667/DIN 52612	Approx. 0.01 m <sup>2</sup> K/W	
Reaction to fire	EN 13501-1	Class B <sub>ff</sub> s1	
	EN ISO 9239-1	≥ 8 kW/m²	
	EN ISO 11925-2	Pass	
Light fastness	EN ISO 105-B02	≥ level 6	
Chemical resistance	EN 423	Good resistance	
Fungi and bacteria resistance	DIN EN 846-A/C	Does not favour growth	
Slip resistance	DIN 51130	R9	
	EN 13893	≥ 0.3	
Colours		22	
Form of delivery	EN 426		
	Sheet	Approx. 23 r m x 200 cm	
	(rolls)	art. no. 3440	
	EN 427		
	Tiles	61 x 61 cm	
	(box)	16 tiles / box = 5.95 m <sup>2</sup>	
	()	art. no. 3441	

NCS CODES AND WELDING RODS				
Colour N°	NCS number	Welding rod N°	Refl. factor (Y)	
3440002	S 3010-Y40R	1294491	41.0	
3440003	S 3005-Y20R	1287402	42.7	
3440004	S 2020-Y20R	1292611	52.2	
3440005	S 2010-Y60R	1288313	53.5	
3440006	S 3005-Y80R	1287403	44.6	
3440007	S 7010-Y70R	1287404	10.2	
3440008	S 3020-R50B	1287405	34.6	
3440009	S 5030-R80B	1292428	12.6	
3440010	S 3020-G30Y	1287332	37.2	
3440011	S 4040-G20Y	1287406	20.0	
3440012	S 6502-B	1292459	15.4	
3440014	S 4500-N	1292383	29.9	
3440016	S 4030-R80B	1288307	19.7	
3440018	S 3030-Y60R	1291363	31.9	
3440026	S 2000-N	1287202	58.4	
3440036	S 2005-Y40R	1292433	55.6	
3440055	S 3502-B	1292388	35.9	
3440056	S 2020-R90B	1291836	45.6	
3440059	S 3010-G10Y	1291841	41.0	
3440062	S 1030-Y20R	1287191	67.1	
3440065	S 2070-Y90R	1288328	16.1	
3440067	S 3020-R80B	1287192	33.3	

The above information is subject to modification for the benefit of further improvement (04/08).

For more detailed technical information, please contact Tarkett.

Please follow Tarkett's installation and maintenance instructions, included on the packaging, carefully.



### TARKETT SALES COMPANIES

www.tarkett-commercial.com

> Australia: Tarkett Australia Pty Ltd - Tel. +61 2 96 34 73 73 > Austria: Tarkett Holding GmbH, Niederlassung Wien - Tel. +43 1 47 88 062 > Baltic States: Tarkett SAS - Tel. +370 37 262 220 > Belgium: S.A. Tarkett NV - Tel. +32 2 520 04 67 > China: Tarkett Asia Pacific Limited Shanghai Representative Office - Tel. +86 (21) 60 95 68 38 > Czech Republic: Tarkett SAS, org. slozka - Tel. +420-271 001 602 > Denmark: Tarkett A/S - Tel. +45 43 90 60 11 > Finland: Tarkett 0y - Tel. +358 9 5406 5870 > France: Tarkett SAS - Tel. +33 1 41 20 42 49 > Germany: Tarkett Holding GmbH, Bereich Objekt – Tel. +49 6233 810 > Greece: Tarkett Monoprosopi Ltd – Tel. +30 2 10 576 3889 > Hong Kong: Tarkett Asia Pacific Ltd. - Tel. +852 2511 8716 > Hungary: Tarkett SAS - Tel. +36 1 437-8150 > Italy: Tarkett S.p.A. - Tel. +39 02 893 411 > Luxembourg: Tel. +352 949 211 8804 > Middle East: Tarkett Middle East – Tel. +961 1 51 3363/4 > Netherlands: Tarkett Benelux B.V. – Tel. +31 76 57 80 760 > Norway: Tarkett AS – Tel. +47 32 20 92 00 > Poland: Tarkett Wykładziny Sp. z o.o. - Tel. +48 22 639 31 66 > Portugal: Tarkett SA - Tel. +351 21 427 64 20 > Russian Federation: Tarkett Russia - Tel. +7 4 95 777 69 83 > Slovakia: Tarkett SAS - Tel. +421 37 6515 404 > Singapore: Tarkett Far East - Tel. +65 67 43 53 84 > South East Europe: Tarkett Trade d.o.o. - Tel. +381 21 7557 649 • (44) 569 12 21 > Spain: Tarkett Floors S.L - Tel. +34 91 358 00 35 > Sweden: Tarkett Sverige AB – Tel. +46 771 25 19 00 > Switzerland: Tarkett Holding GmbH, Bereich Objekt Schweiz – Tel. +41 043 233 79 24 > Ukraine: Tarkett UA - Tel: +380380 (44) 569 12 21 > United Kingdom: Tarkett Ltd - Tel. +44 (0) 1622 854 040 > North America: Johnsonite - Tel. +1 440 543 8916 > Tarkett Inc. USA: - Tel. +1 713 869 5811 > Tarkett International: Tel. +49 6233 811 755 - Tel. +33 1 41 20 41 01