

Easy Living



Product Data Sheets 2006

WOOD



TECHNICAL INFORMATION

	Easy living	Viva	Easy living	Rumba
Thickness (mm)	8,5		12	
Width (mm)	110/190		188	
Length (mm)	1220		2525	
Wearlayer thickness (mm)	~ 0,6		2,5	
Weight (kg/m²)	8,1		6,5	

Taber Abraser/Lacquer's wear resistance*

ENV 13696/SIS 923509

abrasion penetration Proteco Lacq.(revs)	>=7000	>=7000
abrasion penetration Proteco Nat.(revs)	>=6500	>=6500
abrasive wear (mg/100revs)	~3,5	~3,5

Reduction of sound weighted index "footfall" to the room below.

NF EN ISO 140-8/

Acc to NF EN ISO 717-2, ΔL_w in dB

with 2 mm Tarkofoam	17	17
---------------------	----	----

Formaldehyde emission

EN 13986	E1	E1
----------	----	----

Fire safety class

NT Fire 007



Class G**	Class G**
-----------	-----------

Thermal insulation value

(R_T m² K/W)

board only	0,054	0,083
with rag felt	0,074	0,103
with 2 mm Tarkofoam	0,114	0,143

Installation***


Floating	Floating/ Glue down
----------	------------------------

Underfloor heating compatible****

Low temperature (max temperature 27°C), waterborne system or self-regulating electrical system.

- * Method not applicable for brushed products due to the structured surface
- ** Number of approval 4514/86. Floorcovering of class G on noncombustible material or on combustible material with a density not less than 510 kg/m³.
- *** Contact your flooring supplier for further information
- **** Not suitable for the wood species Rumba beech and Rumba maple

Wood floors, Brinell Hardness (BHN), EN1534

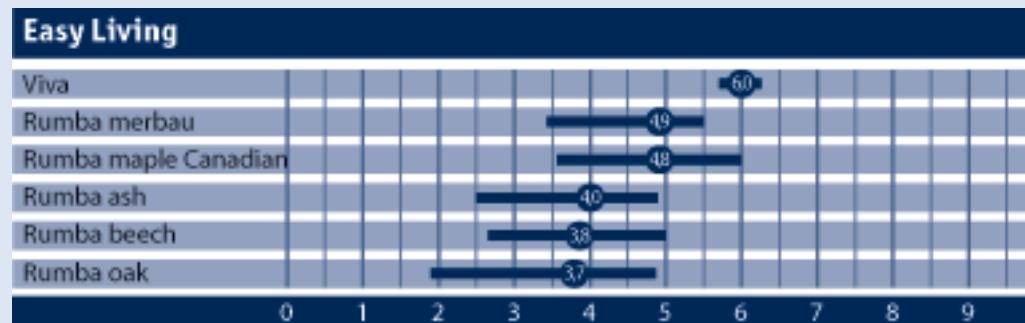

	Easy living	Viva	lacquer	natura
			ultraloc	ultraloc
Viva 8,5 3-strip 190 mm				
oak		o	o	
maple		o	o	
maple natur		o		
cherry		o		
beech nature		o		
beech		o		
walnut		o	o	
african mahogany		o		
Viva 8,5 2-strip 190 mm				
oak		o	o	
oak brushed			o	
oak white			o	
ash white			o	
cherry		o	o	
Viva 8,5 1-strip 190 mm				
oak		o	o	
oak brushed			o	
oak brown brushed			o	
Viva Line 8,5 1-strip 110 mm				
oak		o	o	
oak brushed			o	
cherry			o	
beech			o	
walnut		o	o	
african mahogany		o	o	

	Easy living	Rumba	lacquer	natura
			ultraloc	ultraloc
Rumba 12 3-strip 190 mm				
oak original			o	o
oak brushed original				o
ash original			o	o
maple original			o	o
beech original			o	o
merbau			o	o

o = Class 0 Standard range with stock

