

# FDV-dokumentasjon

Produkt: 04077 005 100

UNDERLAGSSKIVE DIN 125  
ELZ. M 7




# Underlags-skiver

**DIN 125**

## Leveringsprogram underlagsskiver

Materiale	Overflate	Art. gr.
Messing (MS)		<b>0400</b>
Stål	Varmforsinket	<b>0406</b>
Stål	El.forsinket	<b>0407</b>
Stål	El.forsinket	<b>0408</b>
A2 rustfritt		<b>0409</b>
A4 syrefast		<b>0412</b>
Polyetylen		<b>0421 0</b>
Polyamid		<b>0421 00</b>
Stål HB 200	Gulkromatert	<b>1405</b>

for skruer	hull $\varnothing d_1$	Tykkelse s i mm
M3	3,2	0,5
M4	4,3	0,8
M5	5,3	1,0
M 6	6,4	1,6
M 7	7,4	1,6
M 8	8,4	1,6
M 10	10,5	2,0
M 12	13,0	2,5
M 14	15,0	2,5
M 16	17,0	3,0
M 18	19,0	3,0
M 20	21,0	3,0
M 22	23,0	3,0
M 24	25,0	4,0
M 27	28,0	4,0
M 30	31,0	4,0

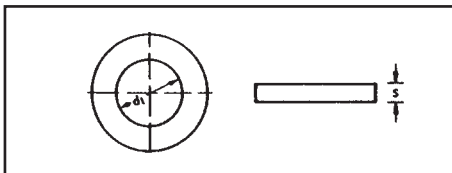

## Stål, el. forsinket, tommer

Art. nr.	Dimensjon
<b>0408 14</b>	1/4"
<b>0408 516</b>	5/16"
<b>0408 38</b>	3/8"
<b>0408 716</b>	7/16"
<b>0408 12</b>	1/2"
<b>0408 916</b>	9/16"
<b>0408 58</b>	5/8"
<b>0408 34</b>	3/4"
<b>0408 78</b>	7/8"
<b>0408 1</b>	1"



## Sortimenter

**Art. nr. 0964 407**

Innhold:

- Underlagsskiver DIN 125, el.forsinket, 10 dim. fra 3,2-21 mm = 1.425 stk.

Leveres i sortimentskrin med 12-roms plastinnlegg.

**Art. nr. 0964 407 1**

Innhold:

- Underlagsskiver DIN 125, gulkromatert, 8 dim. fra 4,3-17 mm = 725 stk.
- Skjermsskiver, gulkromatert, 4 dimensjoner fra 5,3x20 - 10,5x30 mm = 400 stk.

Leveres i sortimentskrin med 12-roms plastinnlegg.